


Design of detection nozzle


● Single hole nozzle

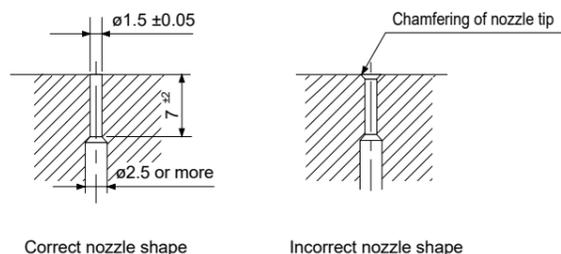

Design the detection nozzle with a point size of $\phi 1.5$ mm and depth of 7 ± 2 mm. The blow-off section of the nozzle cannot be chamfered. If chamfered, the nozzle retracts from the seating place, and the scale on the adjustment dial and actual dimensions do not match.


Selection of detection nozzle diameter

● When the workpiece detection surface is narrow - nozzle diameter $\phi 1$ and width is less than 3 mm, please contact us.

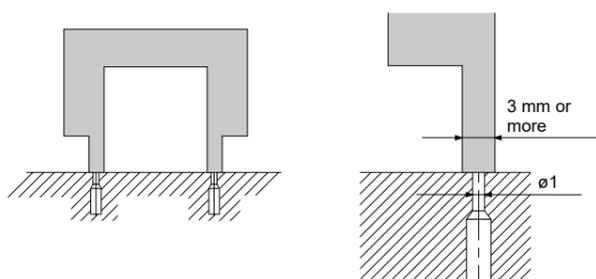


- Use with a detection distance of 0.1 mm or less.
- Use with a workpiece surface roughness of $Rz=5$ or less
- Check that nozzle does not separate from the detection surface.

● When the workpiece detection surface is sufficiently wide: Use $\phi 1.5$ mm nozzle.

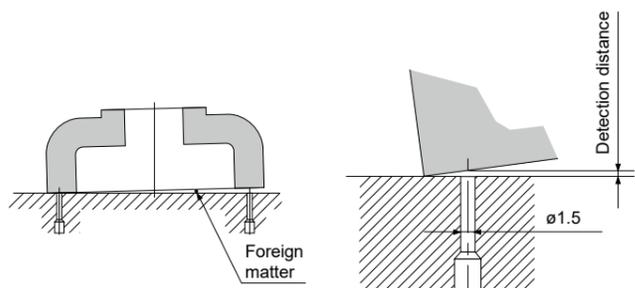

- Use with a detection distance of 0.2 mm or less.
- Use with a workpiece surface roughness of $Rz=5$ or less

● When detecting the presence of a workpiece with a rough detection surface: Use $\phi 1.5$ mm or $\phi 2.0$ mm nozzle.

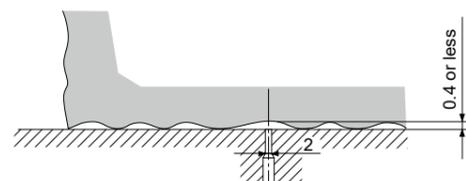

- The max. detection distance of the GPS2 is 0.4 mm. The workpiece cannot be detected if non-uniformity exceeds 0.4 mm. In that case, use the HPS-10.



Pneumatic components (sensors)

Safety Precautions

Be sure to read this section before use.

For general pneumatic components precautions, refer to Intro 17 for details.

Product-specific cautions: Close contact confirmation switch HPS Series

During Design and Selection

⚠ WARNING

■ Use the product in the range of conditions specified for the product. Contact CKD when using the product outside specifications or for special applications.

Use of the product outside the specifications range may result in insufficient performance, and its safety cannot be guaranteed.


■ Confirm before use that the product will withstand the working environment.

- This product cannot be used in environments where functional obstacles could occur.
- The main materials of this product are aluminum and resin. Do not use in atmospheres where corrosive gases are generated. Such environments include high temperatures, chemical atmospheres, where chemical liquids, vibration, moisture, water dripping, coolant, or gas is present; where ozone is generated; chemical plants, semiconductor pre-processing, outdoors, etc.
- Compressed air quality must satisfy JIS1.4.1, "oilless clean dry air."

■ Understand compressed air features before designing a pneumatic circuit.



This product has a small orifice, so to prevent the entry of foreign matter, use clean air with the recommended circuit shown below (Fig. 1).

Fig. 1 Recommended circuit

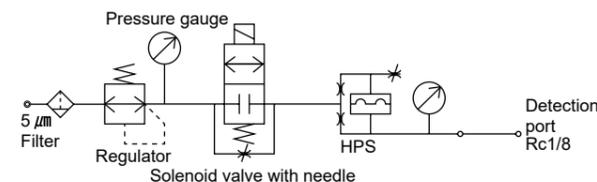

■ Do not use the following air circuit when blowing air from the detection nozzle.

- Circuit with check valve
The check valve acts as exhaust resistance, and limits the adjustable range.
- Circuit with shuttle valve and 2-way valve
Residual pressure in the OUT side of the 2-way valve prevents a correct detection. Even if a 3-way valve is used, the shuttle valve may vibrate excessively.

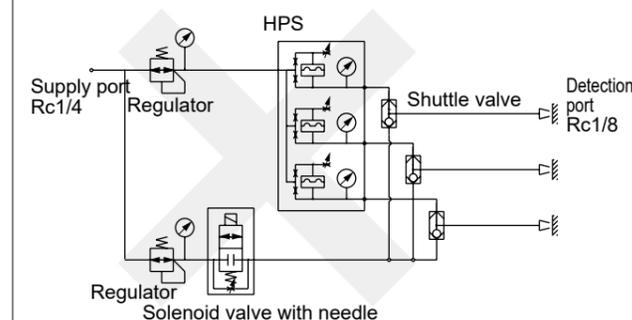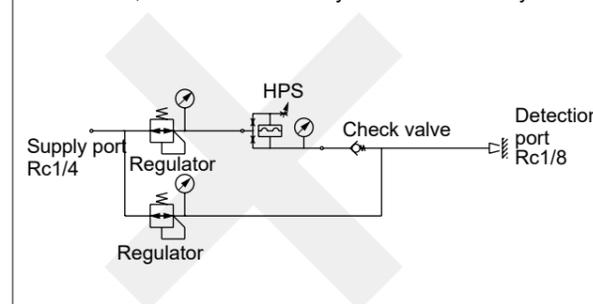

Pressure switch

Electronic pressure switch

Contact Confirm Switch

For Coolant Pressure Switch

Ending

177

Pressure switch

Electronic pressure switch

Contact Confirm Switch

For Coolant Pressure Switch

Ending

176


CAUTION

The entry of compressor oil and tarry substances may obstruct the flow of air and result in problems. Regularly inspect the compressor and discharge drainage.

Keep the air flow constant so coolant and oil do not flow back from the detection nozzle, or use a solenoid valve with needle and let in a small amount of air from the bypass as shown in the recommended circuit (Fig. 1).

Swarf and grinder chips, etc., could clog the nozzle. Increasing the supply pressure to blow these out will have no effect. Provide a 3-way valve on the pressurized nozzle as shown below (Fig. 2). The orifice for the 3-way valve should be $\phi 2.5$ mm or larger.

Fig. 2 Circuit for detection and air blow

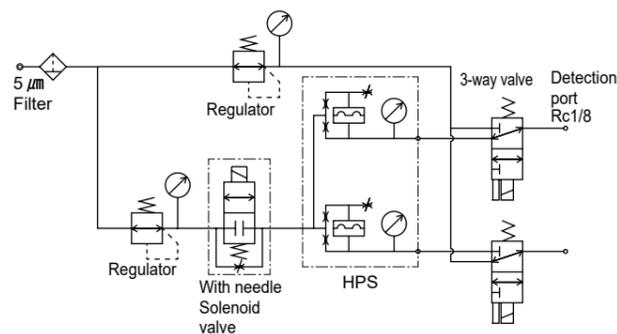

Select an output format (NPN, PNP) matching the input unit of the programmable controller being used.

Operation may be disabled if a capacitance load such as an AC/DC buzzer is connected to the load. Turn power OFF and restart in this case. A protection circuit is provided to prevent damage from incorrect wiring or overcurrent. A relay must be used when connecting a capacitance load.

Precautions for HPS

- Detection side — Use inner diameter $\phi 4$ and outer diameter $\phi 6$ for piping.
- An air bridge circuit is used for this product. Even if the fine air solenoid valve is turned OFF, Even if the fine air solenoid valve is turned OFF, the output is not turned OFF, which is the same for the conventional pressure switch. Output is ON—OFF according to the pressure of a workpiece. Care must be taken when creating the program. If the program has already been created and cannot be changed, stop the fine air. Note that a delay of one second occurs when output is ON—OFF.
- Pressure switch and solenoid valve with fine air
When the fine air solenoid valve is ON → Workpiece absent: OFF Workpiece present: ON
When the fine air solenoid valve is OFF → Workpiece absent: OFF Workpiece present: OFF
- HPS and fine air solenoid valve
When the fine air solenoid valve is ON → Workpiece absent: OFF Workpiece present: ON
When the fine air solenoid valve is OFF → Workpiece absent: OFF Workpiece present: ON

Observe the following items when installing:


- Install this product so the detection port faces downward.
- Install this product at a position higher than the seating surface to prevent coolant from entering.
- Provide enough space for adjustment, monitoring, and maintenance.
- Use rust-resistant material such as nylon tubes or stainless steel pipes for piping material.
- When installing this product on a device, check that no load is applied to the device.
- When using steel pipes, securely fix the pipe to prevent excessive bending force from being applied to the connection.
- When welding near this product, cover it to prevent spatter from coming in contact.
- When housing this product in a box, provide an exhaust port so atmospheric pressure is maintained in the box.

Observe the following items when wiring:

- When using a switching regulator for the power supply, ground the F.G. (frame ground).
- Avoid using in a transient state, continuing 1s after power is turned ON.
- Take special care to prevent load short-circuits or incorrect wiring. The protective circuit is activated. Turn power OFF to restart the product.
- Connector pins are arranged as shown in Fig. 3. Take special care to prevent incorrect wiring.

Brown → 24 VDC
Blue → 0 VDC
Black → signal, open collector

Fig. 3 Connector pin array (body side)




PIN array/lead wire color list

PIN No.	Electrical connection option (-C1, -C3, -C5) lead wire color	Applications
1pin	Brown	Power supply +
2pin	White	NC
3pin	Blue	Power supply -
4pin	Black	Output

The assignment of the DIN terminal box terminal numbers is shown in Fig. 4.


Fig. 4 DIN terminal box pin array (body side)

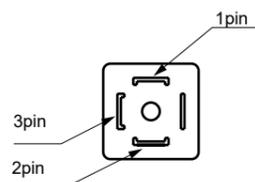

PIN No.	Applications
1pin	Power supply +
2pin	Power supply -
3pin	Output


When using the common terminal box, power supply terminals are on the lower side of the gland. Signal wire terminals are on the upper row. This product is wired as shown in Fig. 5.

Fig. 5 Terminal box layout

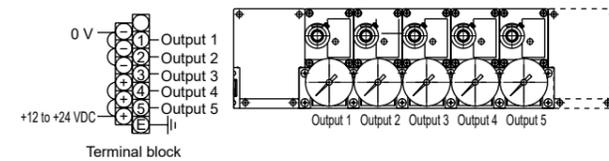



- When using a load with a large rush current, such as a motor, the protection circuit will activate. In this case, use a relay.
- If there is a device (motor, welder) that generates a large surge near this product, insert a surge absorber, such as a varistor, at the source of the surge.
- If this product's lead wire is wired with the drive cable or power cable, it is affected by surge and noise deteriorating or damaging the sensor element in the switch. Use separate wiring.
- NPN output and PNP output contact confirmation switches are available. The lamp turns ON even if program controller compliance is incorrect, but signals are not retrieved. Wire the switch based on the output as shown in Fig. 6.

Fig. 6 Output circuit

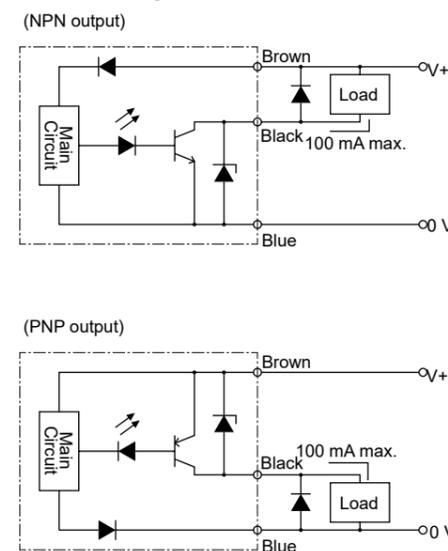

Adjustment sequence

- When this product is shipped from CKD, the adjustment dial is set to display 0 rotations as the number of rotations, and rotation angle 0.
- Supply air. The indicator lamp turns OFF.
- With the master gage OK, turn the knob rotation of the adjustment needle in the direction in which the value rises (open) and determine the OFF→ON switching point A.
- Turn the master gage NG side (OFF state) in the direction in which the value rises (open) again to obtain the OFF→ON switching point B'.
- Turn the motor in the direction in which the rotation speed decreases (closed), and obtain switch point B for ON→OFF. The adjusting range is found by counting the number of rotations from point A to point B.
- Rotate the adjustment needle in the closed direction, and set to the middle point between point A and point B. This position is point C. If point C is near point B, the signal turns ON easily and response time is short. However, it will take time to return. Stable detection is possible by setting adjustment point C between point A and point B.
- Lock the dial after adjusting.

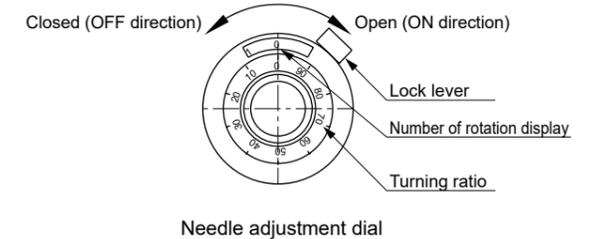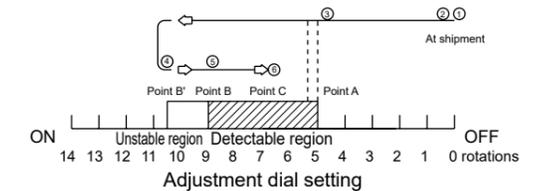

Do not turn the dial with force at extremities of the rotation. The dial can be rotated up to 14 times.

One detection nozzle can be used for one of these product units.

For precautions during mounting, installation, adjustment, use and maintenance, refer to the CKD Components Product Site (<https://www.ckd.co.jp/kiki/en/>) → "Model No. → Instruction Manual"