
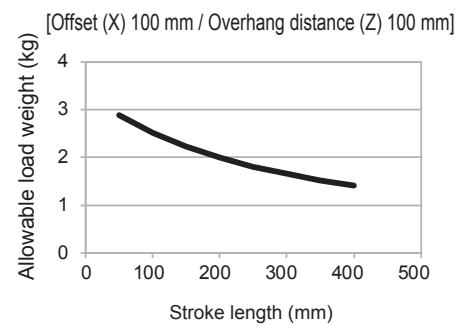
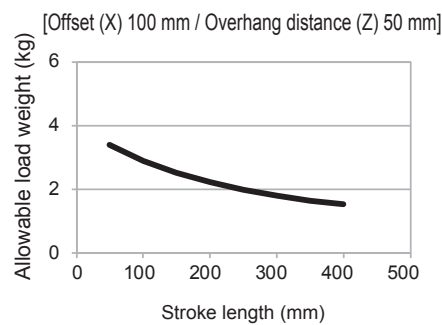
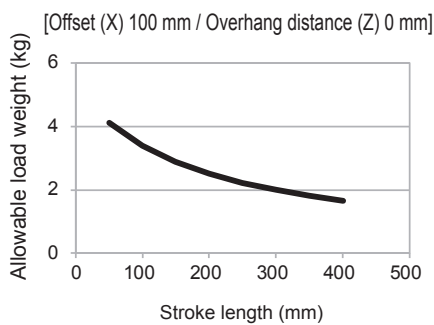
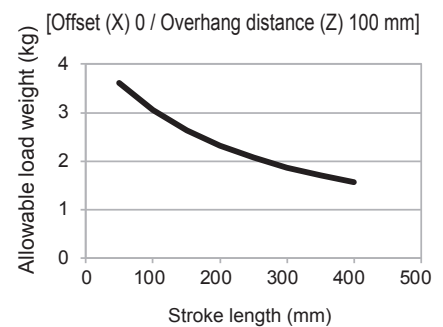
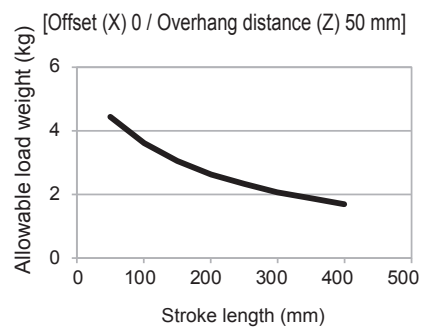
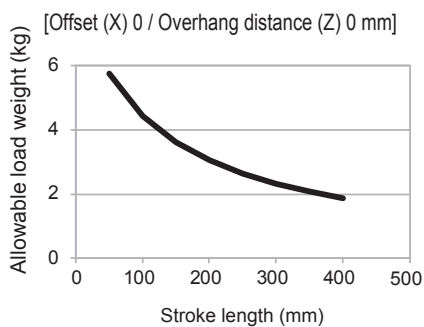
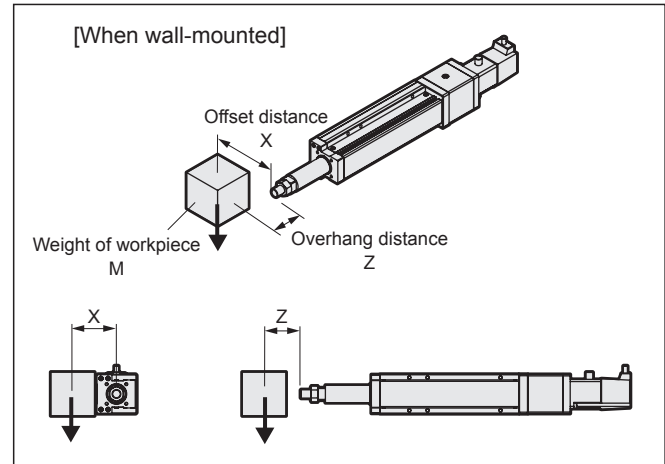


Allowable load weight



* For model selection, refer to “Catalog No. CB-055A” page 26, and apply the values from the tables below (pages 15 and 16) to confirm the allowable load weight.

[When installed horizontally or wall-mounted]

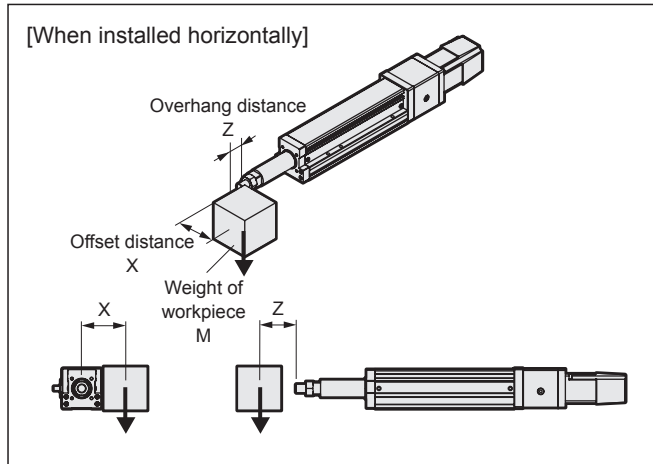

* Values with actuator operating life restricted to 5,000 km. (Acceleration/deceleration 0.5 G, speed 300 mm/s)

[When installed vertically]

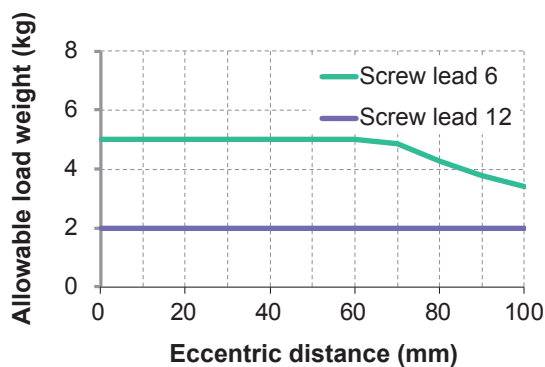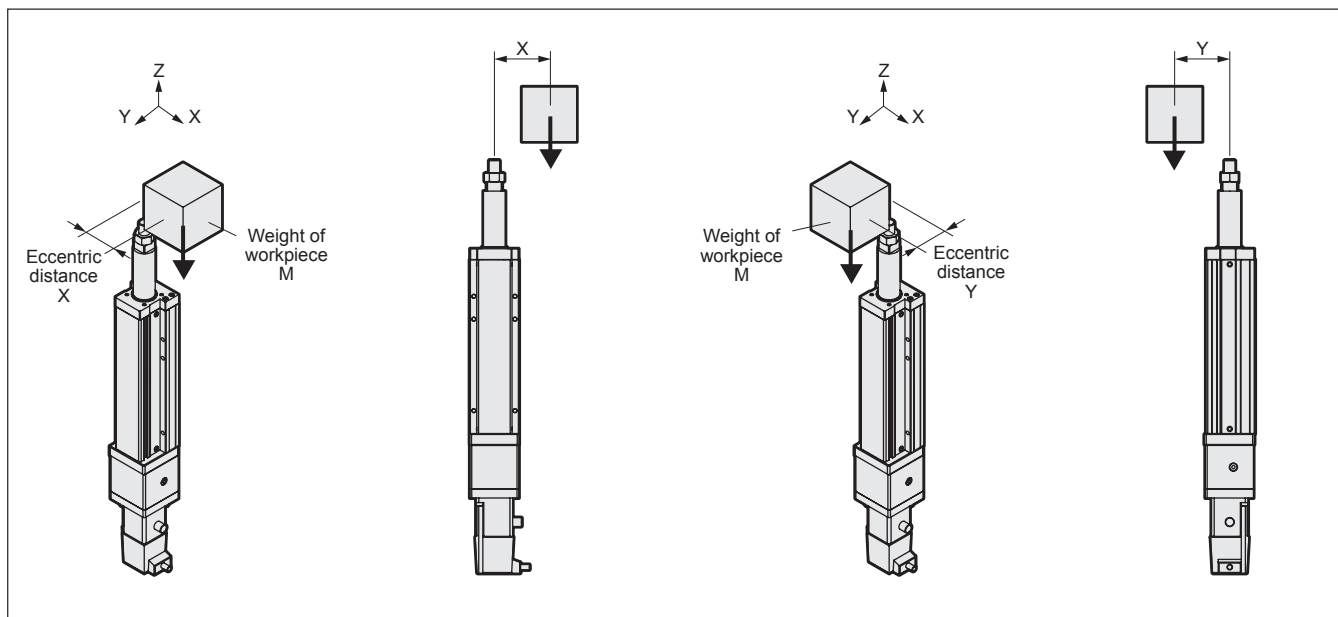

* Values with actuator operating life restricted to 5,000 km. (Acceleration/deceleration 0.5 G, speed 300 mm/s)

Rod end runout (EBR Series) *Reference value

