

Variation and option selection table


JSC3(φ40 to φ100) * Refer to page 1292 for φ125 to φ180.

- : Standard
- ◎ : Option
- : Available (custom order)
- △ : Available depending on conditions (consult with CKD)
- X : Not available

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Code	Code	Variation						Port thread		Option						
		Symbol	No	No	V	H	T	L2	N	G	J	L	M	N	R.S.T	G
		Double acting basic type	Cushioned	With valve	Low hydraulic	Heat resistance (120°C)	Strong magnetic field proof with cylinder switch	NPT	G	Polyolefin with bellows	Silicone rubber with bellows	Piston rod material stainless steel	Customized piston rod end form	Cushion needle relocation	With indicator	
USC	Double acting basic type	Blank	◎	●	●	●	◎	○	○	◎	◎	◎	○	◎	◎	
JSB3	Cushioned	Blank		◎	◎	◎	◎	○	○	◎	◎	◎	○	◎	◎	
LMB	With valve	V			△	△	◎	○	○	◎	◎	◎	○	◎	◎	
STG	Low hydraulic	H				○	X	○	○	◎	◎	◎	○	◎	◎	
STS/L	Heat resistance (120°C)	T					X	○	○	X	◎	◎	○	◎	◎	
LCS	Strong magnetic field proof with cylinder switch	L2						○	○	◎	◎	◎	○	◎	◎	
LCG	NPT	N							X	○	○	○	○	○	○	
LCM	G	G								○	○	○	○	○	○	
LCT	Polyolefin with bellows	J									X	○	○	○	○	
LCY	Silicone rubber with bellows	L										○	○	○	○	
STR2	Piston rod material stainless steel	M											○	○	○	
UCA2	Customized piston rod end form	N												○	○	
HCM	Cushion needle relocation	R.S.T													○	
HCA	With indicator	G														
SRL2	Cylinder switch	Listed on Ending	◎	◎	◎	◎	X	◎			◎	◎	◎	○	◎	◎
SRG	Rod eye	I	◎	◎	◎	◎	◎	◎			◎	◎	◎	○	◎	◎
SRM	Rod clevis	Y	◎	◎	◎	◎	◎	◎			◎	◎	◎	○	◎	◎
SRT	Eye bracket	B1	◎	◎	◎	◎	◎	◎			◎	◎	◎	○	◎	◎
MRL2	Clevis bracket	B2	◎	◎	◎	◎	◎	◎			◎	◎	◎	○	◎	◎
MRG2	Bracket for trunnion	B4	◎	◎	◎	◎	◎	◎			◎	◎	◎	○	◎	◎
SM-25																
CAC3																
UCAC																
RCC2																
MFC																
SHC																
GLC																
Ending																

<Example of model number>

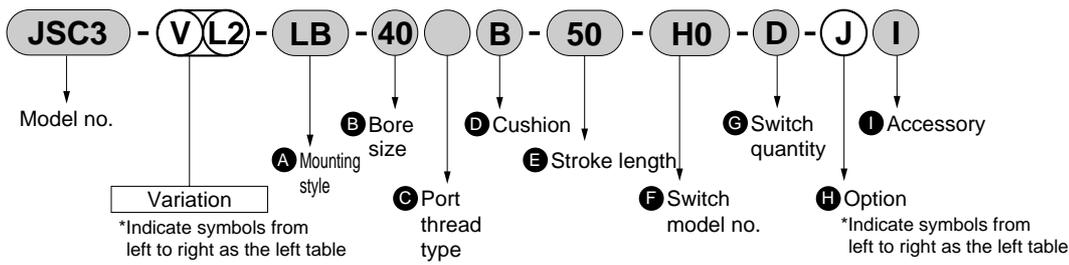

Model no.: Brake cylinder

- Variation: With valve, strong magnetic field proof switch
- Ⓐ Mounting style : Axial foot type
- Ⓑ Bore size : ϕ 40mm
- Ⓒ Port thread type : Rc thread
- Ⓓ Cushion : Both sides cushioned
- Ⓔ Stroke length : 50mm
- Ⓕ Switch model no. : Reed, strong magnetic field proof switch, lead wire 1m
- Ⓖ Switch quantity : Two
- Ⓗ Option : Bellows, max. ambient temperature 100°C
- Ⓘ Accessory : Rod eye

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake


Variation and option selection table

JSC3(ϕ 125 to ϕ 180) * Refer to page 1290 for ϕ 140 to ϕ 100.

- : Standard
- ◎ : Option
- : Available (custom order)
- △ : Available depending on conditions (consult with CKD)
- X : Not available

Code	Code	Variation					Port thread		Option			
	Symbol	No	L	H	T	N	G	J	K	L	M	
Variation	Double acting basic type	Blank	◎	◎	△	△	○	○	◎	◎	◎	◎
	Cushioned			◎	◎	◎	○	○	◎	◎	◎	◎
	With cylinder switch	L			◎	X	○	○	◎	◎	◎	◎
	Low hydraulic	H				X	○	○	◎	◎	◎	◎
	Heat resistance (120°C)	T					○	○	X	X	◎	◎
Port thread	NPT	N					X		○	○	○	○
	G	G							○	○	○	○
Option	Nylon tarpaulin with bellows	J							X	X	○	
	Neoprene with bellows	K								X	○	
	Silicone rubber with bellows	L									○	
	Piston rod material stainless steel	M										○
Accessory	Cylinder switch	Listed on Ending	◎	◎	◎	X			◎	◎	◎	◎
	Rod eye	I	◎	◎	◎	◎			◎	◎	◎	◎
	Rod clevis	Y	◎	◎	◎	◎			◎	◎	◎	◎
	Eye bracket	B1	◎	◎	◎	◎			◎	◎	◎	◎
	Clevis bracket	B2	◎	◎	◎	◎			◎	◎	◎	◎

<Example of model number>

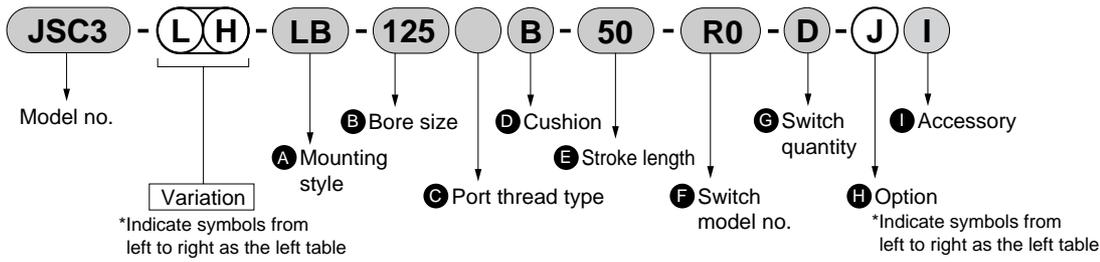

Model no.

- Variation: With switch, low hydraulic type
- Ⓐ Mounting style : Axial foot type
- Ⓑ Bore size : ϕ 125mm
- Ⓒ Port thread type : Rc thread
- Ⓓ Cushion : Both sides cushioned
- Ⓔ Stroke length : 50mm
- Ⓕ Switch model no. : Reed RO switch, lead wire 1m
- Ⓖ Switch quantity : Two
- Ⓗ Option : Bellows and max. ambient temperature 60°C
- Ⓘ Accessory : Rod eye

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake



Pneumatic components

Safety precautions

Always read this section before starting use.

Refer to Intro 71 for general precautions of the cylinder, and to Intro 78 for general precautions of the cylinder switch.

Brake cylinder JSC3 Series

Design & Selection

1. Common

WARNING

■ **Structure so that nothing directly touches the driven object or movable sections of the cylinder with brakes.**
Provide a protective cover so that no human-body directly touches the unit. If parts contact is possible, provide safety measures by placing a sensor to stop the cylinder or sound a warning to report danger.

■ **Use a balance circuit considering piston rod protrusion.**

When activating brakes at any position in the stroke, if pneumatic pressure is applied to only one side of the cylinder, the piston protrudes at high speed when brakes are released. This involves risk to personnel and equipment. Use a balance circuit, such as the recommended pneumatic pressure circuit, to prevent protrusion.

This cylinder has oilless specifications. Do not lubricate this cylinder. Otherwise braking faults may occur. Brake malfunction is caused.

When using the low hydraulic pressure type brake cylinder, always apply the brakes with the pneumatic pressure.

■ **Holding force (maximum static load) refers to performance to hold a static load without vibration or impact when brakes are activated in a no-load state.**

Take care when constantly using near the upper limit of the holding force.

■ **During braking, kinetic energy is large and the braking distance is long. Thus, avoid using when brakes may be applied at the stroke end.**

Even if a cushion is provided, the back pressure is released and the cushions may not function.

If kinetic energy is large, overrun distance increases and stopping accuracy drops.

■ **Do not apply loads with impact, strong vibration, or torque while brakes are activated.**

If a load with impact, strong vibration, or torque is applied externally, holding force drops.

■ **Consider the stoppage accuracy and the overrun distance during the braking.**

A mechanical lock is applied, so the cylinder does not stop instantly when the stop signal is issued, but stops with a time-wise delay. The stroke at which the cylinder slides due to this delay is the overrun distance. Maximum and minimum width of overrun distance is the stoppage accuracy.

- To achieve the required stop position, move the limit switch forward by the overrun distance.
- The limit switch must have a detection length (dog length) equivalent to the overrun distance + α .
- When using the CKD cylinder switch, the working range is 7 to 16 mm, depending on the switch. If overrun distance exceeds this, provide self-holding of the contact at the switch load.

■ **To improve stopping accuracy, minimize the time from stop signal output to brake stoppage.**

Use a high response DC control electricity circuit or solenoid valve, and set the solenoid valve as close to the cylinder as possible.

■ **Stopping accuracy is affected by changes in piston speed.**

If piston speed changes due to load fluctuation or disturbance during cylinder reciprocation, stop position dispersion increases. Take measures to keep piston speed constant just before the stop position. Speed changes are large during the acceleration range, compared to during the cushion stroke and when starting operation, so dispersion in the stop position increases.

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

⚠ WARNING


■ Basic circuit

When using this cylinder for position locking or emergency stop, use the circuits below. The 2-position valve cannot be used since cylinder thrust is also applied to brakes when stopped. Balance thrust and load with the circuit below. Brakes may not be released when load is applied to brakes.

● For horizontal load

If piping is as shown in Fig. 1, equalizing pressure is applied to both ends of the piston when stopped to prevent the rod from protruding when brakes are released. Place a regulator with a check valve on the head to balance thrust.

Fig. 1

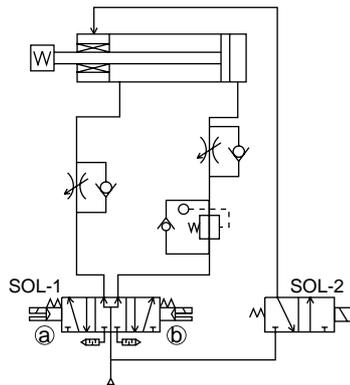


a SOL-1	b	SOL-2	Operational status
OFF	OFF	OFF	Stop
ON	OFF	ON	Return
OFF	ON	ON	Advance

● For downward vertical load

If load faces downward as shown in Fig. 2, the rod malfunctions in the load direction when brakes are released. Place a regulator with a check valve on the head to reduce thrust in the load direction and balance the load.

Fig. 2

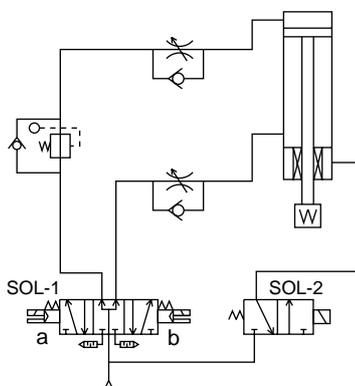


a SOL-1	b	SOL-2	Operational status
OFF	OFF	OFF	Stop
ON	OFF	ON	Down
OFF	ON	ON	Up

● For upward vertical load

If the load faces upward as shown in Fig. 3, the rod malfunctions in the load direction when brakes are released. Place a regulator with a check valve on the rod to reduce thrust in the load direction and balance the load.

Fig. 3

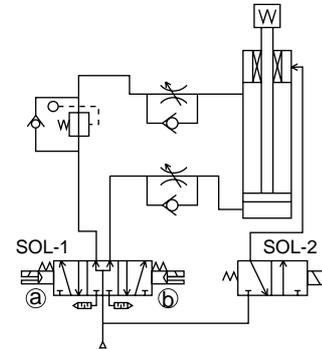

a SOL-1	b	SOL-2	Operational status
OFF	OFF	OFF	Stop
ON	OFF	ON	Down
OFF	ON	ON	Up

⚠ CAUTION

■ Stoppage accuracy

● Stop pitch and load factor

Stopping accuracy differs with stop pitch and load ratio. The load ratio below is recommended for achieving specified stopping accuracy.

Stop pitch	Load ratio	
	JSC3-*	JSC3-S*
50mm or less	20% of thrust	15% of thrust
50mm to 100mm	40% of thrust	30% of thrust
100mm and over	60% of thrust	45% of thrust

● Solenoid valve for brake selection

Stoppage accuracy and overrun length changes depending on the responsiveness of the solenoid valve for brake. Refer to the JSC3-V brake valve electric specifications and select from the CKD pneumatic valve 4KB2 Series. Couple the valve directly to the brake port to improve stopping accuracy.

● Using PC (PLC)

If a PLC is used as the electric control unit for the solenoid valve for brakes, the stopping accuracy will drop because of the scan time (operation process time). When using a PLC, do not assemble the solenoid valve for brake into the PLC circuit.

■ Do not apply the large load when brake stopping. Stopping position may change.

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size) With brake


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

2. Low hydraulic type JSC3-H

⚠ WARNING

- Use the JSC3-H and converter when a stopping accuracy within $\pm 0.2\text{mm}$ is required, when the stopping pitch is 25mm or less, or when an offset load could occur in the middle of the stroke.

Fig. 4

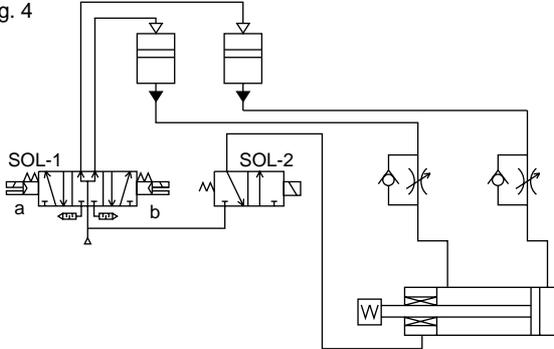

- Always release the brakes before the cylinder operates. If the cylinder operates fast, the brakes might not release.

- If back pressure is applied to the locking mechanism, the lock may be released. Use the brake release valve as a single unit, or use an individual exhaust manifold.
- Use a 3-position P/A/B connection (pressurization on both sides) valve for the cylinder drive to prevent the piston from protruding when starting.
- Use a regulator with a check valve on the side with large thrust to balance thrust, including load.

3. Low pressure release type JSC3-S

⚠ CAUTION

- Due to release pressure reduction, care must be taken because brake holding force is also reduced.


Installation & Adjustment

1. Common

⚠ WARNING

- Release brakes before coupling the load to the end of the rod. If coupled while brakes are applied, torque or load exceeding holding force may be applied to the piston rod and damage the brake mechanism.
- If brakes are released when air is pressurized on only one side of the cylinder, the piston may protrude at high speed, causing a hazard. Observe the points below when releasing brakes for adjustment, etc.
 - Check that no one is in the movable range of the load and that no problem arises if the load moves when brakes are released.
 - Take the following measures to prevent the load from dropping when brakes are released:
 - Set the load at the lowering end.
 - Pressurize both sides.
 - Set a support column.
 Do the position locking such as.
 - Confirm that air is not pressurized on only one side of the cylinder when releasing brakes.

■ Manual brake release method

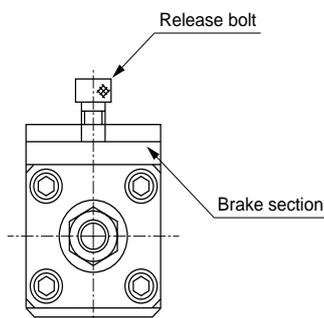

Note: Method of brake release

- The brakes are released by completing screwing the release bolt (enclosed with product) into the female threads (brake release port) on the top of the brakes. (With the ϕ 125 or larger sizes, the brakes are released when the screw is turned in two to three rotations.) Remove the release bolt during normal use.
- Use the release bolt enclosed with the product when manually releasing the brakes. The brakes could be damaged when other bolts are used. Follow the optimum screw-in volume shown below when using a regular bolt.

Bore size	Size		Adequate screw-in volume
	JSC3	JSC3-V	
40, 50	M10 x 8	M10 x 29	4 rotation or less
63	M12 x 9	M12 x 30	
80	M14 x 10	M14 x 31	
100	M16 x 12	M16 x 40	2 to 3 rotation
125	M24 x 16 and over		
140	M24 x 20 and over		
160	M24 x 20 and over		
180	M24 x 24 and over		

- Brakes can be released with manual releasing operations or by applying air pressure to the brake release port. With a load, the load may drop if brakes are left released with either of these operations. Before attaching the load, check that brakes can be applied from the initial state when using manual release or from when air is not applied to the brake release port.
- Do not apply torque to the rod when brakes are applied because holding force may drop, presenting a hazard. Use a rod that does not rotate.
- Do not apply brake holding force to the cylinder exceeding that indicated in the catalog.

- If there is any play, such as looseness, in the brake signal dog, stopping accuracy is affected. Securely fix to eliminate play, etc.
- If cylinder speed is fast, the detection dog must be long enough to match relay response time. If the dog is short, the stop signal is not output and operation does not stop.

⚠ CAUTION

- **Adjust the cylinder air balance.**
With brakes released, place a load on the cylinder and balance the load by adjusting air pressure applied to the cylinder rod and head. Faults such as cylinder protrusion during brake release or improper brake release are prevented by accurately balancing the load.
- **Check the installation position of detectors such as the cylinder switch.**
When using braking, consider overrun distance for the required stopping position, and adjust the position of detectors such as the cylinder switch.

- **Load fluctuation during the cylinder reciprocation stroke leads to changes in the piston speed, which in turn increases dispersion in the stop position. Place and adjust so the load does not change just before stopping in the cylinder reciprocation stroke.**
- **Speed changes are large during the acceleration range compared to during the cushion stroke and when starting operation, so dispersion in the stop position increases. Accuracy in specifications may therefore not be attained in step operation with a short stroke from the starting position to the next position.**
- **Load to piston rod**
Compared to using a general-purpose air cylinder, check that load applied totally to the piston rod is applied in the axial direction. Limit load movement using guides so play or torsion does not occur.
- **Maintenance of rod sliding section**
Check that scratches and dents are not made on the piston rod's sliding section. These can result in damage to packing, leaks, or brake faults.

During Use & Maintenance

1. Common

⚠ WARNING

- The brake section can be removed from the cylinder body. Do not disassemble or inspect brakes or hazards may result when brakes are used again.
- The required grease is applied to brakes. Avoid applying extra grease and do not wipe grease off.
- The required grease is applied when brakes are replaced, so there is no need to apply grease to rods.
- To prevent faults, use a dust cover during operation except when manually releasing brakes.

⚠ CAUTION

- If the air supply pipe is thin or long, stoppage accuracy drops.
- Frictional resistance increases and causes the piston speed to change when the cylinder has been stopped for a long time, such as when using first thing in the morning or afternoon. This may impair stoppage accuracy. Conduct break-in operation to obtain stable stoppage accuracy.

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake

Discontinue

Brake cylinder Double acting single rod type/double acting oil-free type

JSC3/JSC3-N Series

- Bore size: $\phi 40$, $\phi 50$, $\phi 63$, $\phi 80$, $\phi 100$
 $\phi 125$, $\phi 140$, $\phi 160$, $\phi 180$

JIS symbol



Specifications

Descriptions		JSC3 (with switch)					JSC3-N/JSC3-LN				JSC3-S (with switch)						
Bore size	mm	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$		
Actuation		Double acting										Double acting low pressure release type					
Working fluid		Compressed air															
Max. working pressure		1.0															
Min. working pressure	Brake section	0.3															
	Cylinder section	0.1					0.05				0.1						
Withstanding pressure		1.6															
Ambient temperature		-10 to 60 (no freezing)					-5 to 60 (no freezing)				-10 to 60 (no freezing)						
Port size	Brake section	Rc1/8			Rc1/4		Rc3/8		Rc1/2			Rc1/8		Rc1/4		Rc3/8	
	Cylinder section	Rc1/4		Rc3/8		Rc1/2		Rc1/2		Rc3/4		Rc1/4		Rc3/8		Rc1/2	
Stroke tolerance		$^{+0.9}_0$ (to 360)			$^{+1.4}_0$ (to 1000)		$^{+1.0}_0$ (to 300), $^{+1.4}_0$ (to 1000), $^{+1.8}_0$ (to 2000)			$^{+0.9}_0$ (to 360)		$^{+1.4}_0$ (to 1000)					
Working piston speed		50 to 1000 (used within allowable energy absorption)															
Cushion		Air cushion															
Effective cushion length		14.6	16.6	20.6	23.6	21.6				14.6	16.6	20.6	23.6				
Lubrication		Not required (when lubricating, use turbine oil Class 1 ISOVG32)															
Stoppage accuracy		± 1.0 (300mm/s loadless)															
Holding force		980	1569	2451	3922	6178	9600	12000	15800	20000	784	1255	1961	3138	4941		
Allowable energy absorption	Cushioned	4.29	8.37	15.8	27.9	49.8	63.6	91.5	116	152	4.29	8.37	15.8	27.9	49.8		
	No cushion	0.067	0.079	0.079	0.201	0.301	0.371	0.386	0.386	0.958	0.067	0.079	0.079	0.201	0.301		

Note: If "No cushion" is selected, the large energy generated by the external load cannot be absorbed. We recommend to use an external shock absorber together.

Stroke length

Bore size (mm)	Standard stroke length (mm)	Max. stroke length (mm)	Available stroke length (mm)	Min. stroke length (mm)
$\phi 40$	50, 75, 100, 150, 200, 250, 300, 350, 400, 450, 500	600	1600	1
$\phi 50$			2000	
$\phi 63$		700	2500	
$\phi 80$				
$\phi 100$	50, 75, 100, 150, 200, 250, 300	800	2000	
$\phi 125$				
$\phi 140$		800		
$\phi 160$				
$\phi 180$	900			

Note: If the max. stroke is exceeded, product specifications may not be met, depending on operating conditions. Refer to Ending 74 for details. Custom stroke length is available per 1mm increment.

Min. stroke length of type with switch (T type switch)

- T0/T5 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation	Head end trunnion installation
	1	2	3	4	1	2	3	4	1	2	3	4	A position can not be detected at rod side stroke end.	A position can not be detected at rod side stroke end.
$\phi 40$	20 (10)	20 (20)	40 (40)	60 (60)	20 (10)	60 (45)	105 (75)	150 (105)	110 (110)	110 (110)	175 (145)	175 (145)	50 (50)	50 (50)
$\phi 50$	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	20 (20)	65 (50)	65 (60)	135 (135)	135 (135)	135 (135)	135 (135)	60 (60)	60 (60)
$\phi 63$	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	20 (20)	70 (55)	70 (60)	110 (95)	110 (95)	110 (100)	110 (100)	50 (45)	50 (45)
$\phi 80$	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	115 (85)	115 (85)	115 (105)	115 (105)	55 (40)	55 (40)
$\phi 100$	15 (15)	25 (25)	45 (45)	70 (70)	15 (15)	25 (25)	70 (55)	70 (70)	125 (95)	125 (95)	125 (115)	125 (115)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

Min. stroke length of type with switch (T type switch)

● T8 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation A position can not be detected at rod side stroke end.	Head end trunnion installation A position can not be detected at rod side stroke end.
	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ40	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	50 (35)	95 (65)	140 (95)	95 (85)	95 (85)	155 (125)	155 (125)	45 (40)	45 (40)
φ50	10 (10)	20 (20)	40 (40)	60 (60)	10 (10)	20 (20)	70 (55)	70 (60)	115 (115)	115 (115)	135 (135)	135 (135)	50 (50)	50 (50)
φ63	10 (10)	20 (20)	40 (40)	60 (60)	10 (10)	20 (20)	70 (55)	70 (60)	95 (75)	95 (75)	110 (110)	110 (110)	45 (35)	45 (35)
φ80	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	100 (70)	100 (70)	115 (115)	115 (115)	50 (35)	50 (35)
φ100	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	110 (80)	110 (80)	125 (125)	125 (125)	55 (40)	55 (40)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

● T2/T3 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation A position can not be detected at rod side stroke end.	Head end trunnion installation A position can not be detected at rod side stroke end.
	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ40	20 (10)	20 (15)	25 (25)	40 (40)	20 (10)	60 (45)	105 (75)	150 (105)	105 (75)	105 (75)	165 (135)	165 (135)	50 (35)	50 (35)
φ50	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	105 (75)	105 (75)	105 (75)	105 (75)	45 (30)	45 (30)
φ63	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	110 (80)	110 (80)	110 (85)	110 (85)	50 (35)	50 (35)
φ80	15 (10)	15 (15)	30 (30)	45 (45)	15 (10)	15 (15)	60 (45)	60 (45)	115 (85)	115 (85)	115 (90)	115 (90)	55 (40)	55 (40)
φ100	10 (10)	15 (15)	30 (30)	45 (45)	10 (10)	15 (15)	60 (45)	60 (45)	125 (95)	125 (95)	125 (100)	125 (100)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

● T1/T2Y/T3Y/T2YD type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation A position can not be detected at rod side stroke end.	Head end trunnion installation A position can not be detected at rod side stroke end.
	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ40	20 (10)	20 (15)	25 (25)	40 (40)	20 (10)	60 (45)	105 (75)	150 (105)	105 (75)	105 (75)	165 (135)	165 (135)	50 (35)	50 (35)
φ50	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	100 (70)	100 (70)	100 (75)	100 (75)	45 (30)	45 (30)
φ63	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	105 (75)	105 (75)	105 (85)	105 (85)	50 (35)	50 (35)
φ80	15 (10)	15 (15)	30 (30)	45 (45)	15 (10)	15 (15)	60 (45)	60 (45)	110 (80)	110 (80)	110 (90)	110 (90)	55 (40)	55 (40)
φ100	10 (10)	15 (15)	30 (30)	45 (45)	10 (10)	15 (15)	60 (45)	60 (45)	120 (90)	120 (90)	120 (100)	120 (100)	60 (45)	60 (45)





Note 1: Value in () for T*V (Radial lead wire). Note that radial lead wire (V) is not available for T2YD.

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

Min. stroke length of type with switch (R type switch)

● φ125 to φ180

(Unit: mm)

Descriptions Bore size (mm)	Stroke length when same surface installation	Stroke length when center trunnion installation	Stroke length when rod end trunnion installation	Stroke length when head end trunnion installation
				
φ125	20 and over * (25 and over)	120 and over	70 and over	
φ140		125 and over	75 and over	
φ160		130 and over	80 and over	
φ180		135 and over	85 and over	

*The minimum stroke length for R2YK and R3YK.

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MLR2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake

Switch specifications (T type switch)

● 1 color/2 color indicator/strong magnetic field proof

*The T0/T5 switch can be used with 220 VAC . Consult CKD for working conditions.

Descriptions	Proximity 2 wire			Proximity 3 wire			Reed 2 wire					Proximity 2 wire			
	T1H/T1 V	T2H/T2V/ T2JH/T2JV	T2YH/T2YV	T3H/T3V	T3PH/T3PV (Custom order)	T3YH/T3YV	T0H/T0V	T5H/T5V		T8H/T8V		T2YD*/T2YDPT*			
Applications	Programmable controller relay, small solenoid valve	Programmable controller		Programmable controller, relay			Programmable controller, relay	Programmable controller, relay, IC circuit (two indicator light), serial connection		Programmable controller, relay		Programmable controller			
Output method	-			NPN output	PNP output	NPN output	-								
Power voltage	-			10 to 28 VDC			-								
Load voltage	85 to 265 VAC	10 to 30 VDC		30 VDC or less			12/24 VDC	110 VAC	5/12/24 VDC	110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ± 10%	
Load current	5 to 100mA	5 to 20mA (Note 1)		100mA or less			50mA or less	5 to 50mA	7 to 20mA	50mA or less	20mA or less	5 to 50mA	7 to 20mA	7 to 10mA	5 to 20mA
Light	LED (ON lighting)	LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	Green LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	Without indicator light		LED (ON lighting)		Red/green LED (ON lighting)			
Leakage current	1mA or less with 100 VAC 2mA or less with 200 VAC	1mA or less		10 μA or less			0mA					1mA or less			

● With preventive maintenance output

Descriptions	Proximity 3 wire		Proximity 4 wire		Proximity 3 wire		Proximity 4 wire		
	T2YFH/V		T3YFH/V		T2YMH/V		T3YMH/V		
Applications	Programmable controller		Programmable controller, relay		Programmable controller		Programmable controller, relay		
Output method	NPN output								
Light	Red/green LED (ON lighting)								
	Yellow LED (ON lighting)								
Regular Output	Power voltage	-		10 to 28 VDC		-		10 to 28 VDC	
	Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC		30 VDC or less	
	Load current	5 to 20mA		50mA or less		5 to 20mA		50mA or less	
	Leakage current	1mA or less		10 μA or less		1.2mA or less		10 μA or less	
Preventive maintenance Output	Load voltage	30 VDC or less							
	Load current	20mA or less		50mA or less		5 to 20mA or less		50mA or less	
	Leakage current	10 μA or less							

Note 1: Refer to Ending 1 for other switches.

Note 2: Max. load current above: 20mA at 25°C . The current will be lower than 20mA if ambient temperature around switch is higher than 25 °C . (5 to 10mA at 60°C)

Switch specifications (R type switch/H type switch)

● Proximity switch

Descriptions	Proximity 2 wire			Proximity 3 wire	
	R1/R1K	R2/R2K	R2Y/R2YK (2 color indicator type)	R3/R3K	R3Y/R3YK (2 color indicator type)
Applications	Programmable controller, relay, small solenoid valve		Programmable controller		Programmable controller, relay, IC circuit, solenoid valve
Output method	NPN output				
Power voltage	4.5 to 28 VDC				
Load voltage / current	85 to 265 VAC and 5 to 100mA		10 to 30 VDC and 5 to 30mA		30 VDC or less 200mA or less 150mA or less
Light	LED (ON lighting)			Red/green LED (ON lighting)	LED (ON lighting) Red/green LED (ON lighting)
Leakage current	1mA or less with 100 VAC 2mA or less with 200 VAC		1mA or less	1.2mA or less	10 μA or less

● Reed switch

Descriptions	Reed 2 wire						
	R0	R4	R5	R6	H0	H0Y (2 color indicator type)	
Applications	Relay, programmable controller	High capacity relay, solenoid valve	Programmable controller, relay, IC circuit (two indicator light), serial connection	Programmable controller (with DC self hold)	Relay, programmable controller	Programmable controller	
Load voltage / current	12/24 VDC, 5 to 50mA 110 VAC, 7 to 20mA 220 VAC, 7 to 10mA	110 VAC, 20 to 200mA 220 VAC, 10 to 200mA	5/12/24 VDC, 50mA or less 110 VAC, 20mA or less 220 VAC, 10mA or less	24 VDC, 5 to 50mA	12/24 VDC 5 to 50mA	110 VAC 7 to 20mA	24 VDC, 5 to 20mA (Note 2)
Light	LED ON lighting	Neon light OFF lighting	None	LED ON lighting	Green LED ON lighting	Red/green LED ON lighting	
Leakage current	0mA	1mA or less	0mA	0.1mA or less	10 μA or less		

Note 1: Refer to Ending 1 for other switch specifications.

Note 2: The maximum load current is applied at 25°C . The current will be lower than 20mA if ambient temperature around switch is higher than 25 °C . (5 to 10mA when 60 °C)

Cylinder weight

● $\phi 40$ to $\phi 100$

(Unit: kg)

Descriptions, mounting style	Product weight when stroke length (S) = 0mm						Weight per switch (including mounting bracket)					Additional weight per S = 100mm
							T type	H type		T2YD type		
	Bore size (mm)	Basic type (00)	Foot type (LB)	Flange type (FA, FB)	Eye bracket type (CA)	D mountain clevis type (CB)		Trunnion type (TC)	1m	3m	1m	
$\phi 40$	2.48	2.66	2.91	2.83	2.83	2.86	0.018	0.10	0.20	0.08	0.17	0.39
$\phi 50$	3.47	3.67	3.97	3.87	3.87	3.97						0.46
$\phi 63$	5.09	5.49	6.19	5.79	5.79	5.89						0.50
$\phi 80$	8.15	8.85	9.95	9.65	9.65	9.45						0.90
$\phi 100$	14.70	15.70	17.40	16.90	16.90	17.30						1.12

(E.g.) Product weight of JSC3-LB-50B-200-T0H-D

Product weight when S = 0mm 3.67kg
 Additional weight when S = 200mm $0.46 \times \frac{200}{100} = 0.92$ (kg)
 Weight of two switches $0.018 \text{kg} \times 2 = 0.036 \text{kg}$
 Product weight $3.67 \text{kg} + 0.92 \text{kg} + 0.036 \text{kg} = 4.626 \text{kg}$

● $\phi 125$ to $\phi 180$

(Unit: kg)

Descriptions, mounting style	Product weight when stroke length (S) = 0mm					Additional weight per S = 100mm	R type		H type		T2YD type	
	Axial foot type (LB)	Flange type (FA, FB)	Eye bracket type (CA)	D mountain clevis type (CB)	Trunnion type (TC, TA, TB)		Grommet	Terminal box	1m	3m	1m	3m
$\phi 125$	33.3	35.1	34.8	34.9	35.2	2.60	0.10	0.09	0.10	0.20	0.08	0.17
$\phi 140$	43.8	47.2	45.6	45.8	45.0	2.96						
$\phi 160$	56.8	60.6	58.7	59.0	60.1	3.57						
$\phi 180$	79.6	87.1	82.5	83.0	83.2	4.94						

(E.g.) JSC3-N-LB-125B-300

Product weight when S = 0mm 33.3kg
 Additional weight when S = 300mm $2.60 \times \frac{300}{100} = 7.8 \text{kg}$
 Product weight when S = 300mm $33.3 + 7.8 = 41.1 \text{kg}$


Oil-prohibited specifications (Ending 126)

(JSC3) - - (P12)

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC

Ending
Brake cylinder (medium and large bore size)
With brake

How to order (φ 40 to φ 100)

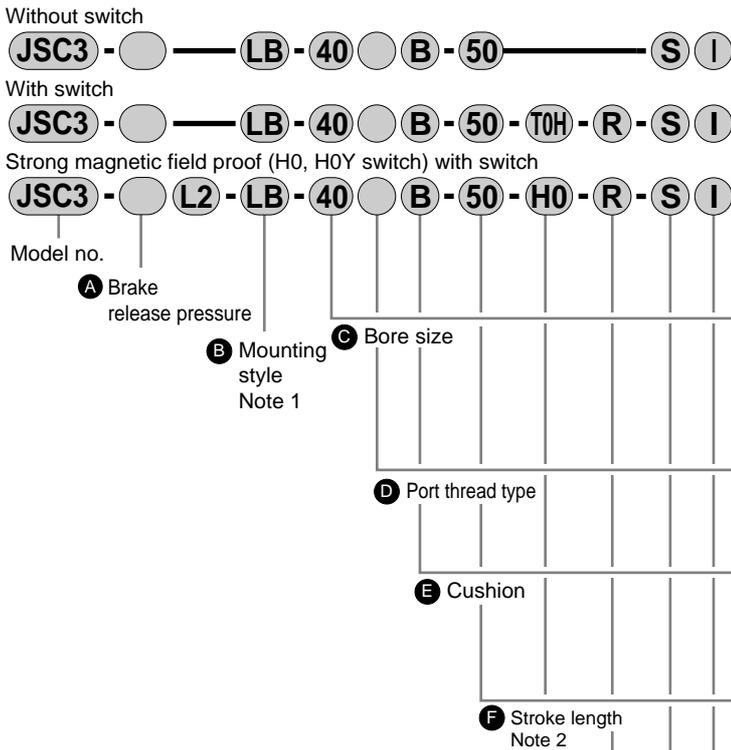

⚠ Note on model no. selection

- Note 1: The mounting bracket is shipped with the product. (Special head end flange type is attached when shipped.)
- Note 2: Refer to Ending 74 if max. stroke length is exceeded.
- Note 3: Refer to page 1299 for min. stroke length with switch.
- Note 4: When selecting TA or TB for mounting, the number of switches is limited to "H" (one on head end) for TA, and "R" (one on rod end) for TB.
- Note 5: Refer to each dimensions to confirm indication of "S", "T", and "G" positions.
- Note 6: "I" and "Y" can not be selected at the same time.
- Note 7: Refer to Ending 89 for custom specifications of rod end form.

<Example of model number>

JSC3-LB-40B-50-T0H-R-S-I

Model: Brake cylinder double acting

- (A) Brake release pressure : Standard type 0.3MPa
- (B) Mounting style : Axial foot type
- (C) Bore size : φ40mm
- (D) Port thread type : Rc thread
- (E) Cushion : Both sides cushioned
- (F) Stroke length : 50mm
- (G) Switch model no. : Reed switch T0H, lead wire 1m
- (H) Switch quantity : One on rod end
- (I) Option : Cushion needle position S
- (J) Accessory : Rod eye

Symbol	Descriptions		
(A) Brake release pressure			
Blank	Standard type 0.3MPa		
S	Low pressure release type 0.25MPa		
(B) Mounting style			
00	Basic type		
LB	Axial foot type		
FA	Rod end flange type		
FB	Head end flange type		
FC	Special head end flange type		
CA	Eye bracket type		
CB	Clevis bracket type (pin and snap ring attached)		
TC	Center trunnion type		
TA	Rod end trunnion type		
TB	Head end trunnion type		
(C) Bore size (mm)			
40	φ40		
50	φ50		
63	φ63		
80	φ80		
100	φ100		
(D) Port thread type			
Blank	Rc thread		
N	NPT thread (custom order)		
G	G thread (custom order)		
(E) Cushion			
B	Both sides cushioned		
R	Rod end cushion		
H	Head end cushion		
N	No cushion		
(F) Stroke length (mm)			
Bore size	Stroke length Note 3	Available stroke length	Custom stroke length
φ40	1 to 600	1600	1 mm increment
φ50	1 to 600	2000	
φ63	1 to 600	2500	
φ80	1 to 700	2500	
φ100	1 to 800	2500	
(G) Switch model no.			
Refer to the following page for switch model no.			
*Lead wire length			
Blank	1m (standard)		
3	3m (option)		
5	5m (option)		
(H) Switch quantity			
R	One on rod end		
H	One on rod head		
D	Two		
T	Three		
4	Four (if more than four switches, indicate switch quantity.)		
(I) Option			
		Max. ambient temperature	Instantaneous max. temperature
J	Bellows	100 °C	200 °C
L	Bellows	250 °C	400 °C
M	Piston rod material (stainless steel)		
Blank	Cushion needle position R (standard)		
S	Cushion needle position S		
T	Cushion needle position T		
G	With indicator		
(J) Accessory			
I	Rod eye		
Y	Rod clevis (pin and snap ring attached)		
B1	Eye bracket		
B2	Clevis bracket (pin and snap ring attached)		
B3	Eye bracket		
B4	Trunnion type No. 2 bracket		

How to order mounting bracket

● φ 40 to φ 100

Bore size (mm)	φ 40	φ 50	φ 63	φ 80	φ 100
Mounting bracket					
Foot (LB)	S1-LB-40	S1-LB-50	S1-LB-63	S1-LB-80	S1-LB-100
Flange (FB)	JSC3-40-FB	JSC3-50-FB	JSC3-63-FB	JSC3-80-FB	JSC3-100-FB
Eye (CA)	S1-CA-40	S1-CA-50	S1-CA-63	S1-CA-80	S1-CA-100
Clevis (CB)	S1-CB-40	S1-CB-50	S1-CB-63	S1-CB-80	S1-CB-100

Note 1: The foot type mounting bracket is supplied as a two-piece set.

[G] Switch model no.

T type switch				
Axial lead wire	Radial lead wire	Contact	Indicator	Lead wire
T0H*	T0V*	Reed	1 color indicator type	2-wire
T5H*	T5V*		Without indicator light	
T8H*	T8V*		1 color indicator type	
T1H*	T1V*	Proximity	1 color indicator type	2-wire
T2H*	T2V*			
T3H*	T3V*		2 color indicator type	3-wire
T2YH*	T2YV*			
T3YH*	T3YV*		1 color indicator type (custom order)	3-wire
T3PH*	T3PV*			
T2YFH*	T2YFV*		2 color indicator type (w/o indicator light for preventive maintenance output)	3-wire
T3YFH*	T3YFV*			
T2YMH*	T2YMV*		2 color indicator type (with indicator light for preventive maintenance output (1 color))	3-wire
T3YMH*	T3YMV*			
T2YD*	-	Strong magnetic field proof switch	2-wire	
T2YDT*	-			
T2JH*	T2JV*	Off-delay type	2-wire	

R switch/H types switch					
Grommet type	Terminal box type		Contact	Indicator	Lead wire
	Standard type	Water tight type			
R1*	R1B	R1A			2-wire
R2*					2-wire
R3*					2-wire
R4*					2-wire
R5*					2-wire
R6*					2-wire
R7*					2-wire
R8*					2-wire
R9*					2-wire
R10*					2-wire
R11*					2-wire
R12*					2-wire
R13*					2-wire
R14*					2-wire
R15*					2-wire
R16*					2-wire
R17*					2-wire
R18*					2-wire
R19*					2-wire
R20*					2-wire
R21*					2-wire
R22*					2-wire
R23*					2-wire
R24*					2-wire
R25*					2-wire
R26*					2-wire
R27*					2-wire
R28*					2-wire
R29*					2-wire
R30*					2-wire
R31*					2-wire
R32*					2-wire
R33*					2-wire
R34*					2-wire
R35*					2-wire
R36*					2-wire
R37*					2-wire
R38*					2-wire
R39*					2-wire
R40*					2-wire
R41*					2-wire
R42*					2-wire
R43*					2-wire
R44*					2-wire
R45*					2-wire
R46*					2-wire
R47*					2-wire
R48*					2-wire
R49*					2-wire
R50*					2-wire
R51*					2-wire
R52*					2-wire
R53*					2-wire
R54*					2-wire
R55*					2-wire
R56*					2-wire
R57*					2-wire
R58*					2-wire
R59*					2-wire
R60*					2-wire
R61*					2-wire
R62*					2-wire
R63*					2-wire
R64*					2-wire
R65*					2-wire
R66*					2-wire
R67*					2-wire
R68*					2-wire
R69*					2-wire
R70*					2-wire
R71*					2-wire
R72*					2-wire
R73*					2-wire
R74*					2-wire
R75*					2-wire
R76*					2-wire
R77*					2-wire
R78*					2-wire
R79*					2-wire
R80*					2-wire
R81*					2-wire
R82*					2-wire
R83*					2-wire
R84*					2-wire
R85*					2-wire
R86*					2-wire
R87*					2-wire
R88*					2-wire
R89*					2-wire
R90*					2-wire
R91*					2-wire
R92*					2-wire
R93*					2-wire
R94*					2-wire
R95*					2-wire
R96*					2-wire
R97*					2-wire
R98*					2-wire
R99*					2-wire
R100*					2-wire
R101*					2-wire
R102*					2-wire
R103*					2-wire
R104*					2-wire
R105*					2-wire
R106*					2-wire
R107*					2-wire
R108*					2-wire
R109*					2-wire
R110*					2-wire
R111*					2-wire
R112*					2-wire
R113*					2-wire
R114*					2-wire
R115*					2-wire
R116*					2-wire
R117*					2-wire
R118*					2-wire
R119*					2-wire
R120*					2-wire
R121*					2-wire
R122*					2-wire
R123*					2-wire
R124*					2-wire
R125*					2-wire
R126*					2-wire
R127*					2-wire
R128*					2-wire
R129*					2-wire
R130*					2-wire
R131*					2-wire
R132*					2-wire
R133*					2-wire
R134*					2-wire
R135*					2-wire
R136*					2-wire
R137*					2-wire
R138*					2-wire
R139*					2-wire
R140*					2-wire
R141*					2-wire
R142*					2-wire
R143*					2-wire
R144*					2-wire
R145*					2-wire
R146*					2-wire
R147*					2-wire
R148*					2-wire
R149*					2-wire
R150*					2-wire
R151*					2-wire
R152*					2-wire
R153*					2-wire
R154*					2-wire
R155*					2-wire
R156*					2-wire
R157*					2-wire
R158*					2-wire
R159*					2-wire
R160*					2-wire
R161*					2-wire
R162*					2-wire
R163*					2-wire
R164*					2-wire
R165*					2-wire
R166*					2-wire
R167*					2-wire
R168*					2-wire
R169*					2-wire
R170*					2-wire
R171*					2-wire
R172*					2-wire
R173*					2-wire
R174*					2-wire
R175*					2-wire
R176*					2-wire
R177*					2-wire
R178*					2-wire
R179*					2-wire
R180*					2-wire
R181*					2-wire
R182*					2-wire
R183*					2-wire
R184*					2-wire
R185*					2-wire
R186*					2-wire
R187*					2-wire
R188*					2-wire
R189*					2-wire
R190*					2-wire
R191*					2-wire
R192*					2-wire
R193*					2-wire
R194*					2-wire
R195*					2-wire
R196*					2-wire
R197*					2-wire
R198*					2-wire
R199*					2-wire
R200*					2-wire
R201*					2-wire
R202*					2-wire
R203*					2-wire
R204*					2-wire
R205*					2-wire
R206*					2-wire
R207*					2-wire
R208*					2-wire
R209*					2-wire
R210*					2-wire
R211*					2-wire
R212*					2-wire
R213*					2-wire
R214*					2-wire
R215*					2-wire
R216*					2-wire
R217*					2-wire
R218*					2-wire
R219*					2-wire
R220*					2-wire
R221*					2-wire
R222*					2-wire
R223*					2-wire
R224*					2-wire
R225*					2-wire
R226*					2-wire
R227*					2-wire
R228*					2-wire
R229*					2-wire
R230*					


JSC3-N Series

How to order (φ125 to φ180)

Without switch



With switch



A Mounting style
Note 1

B Bore size

C Port thread type

D Cushion

E Stroke length
Note 2

F Switch model no.
* indicates lead wire length

G Switch quantity
Note 4

H Option
Note 5

I Accessory
Note 6

Note on model no. selection

- Note 1: The mounting bracket is shipped with the product.
- Note 2: Refer to Ending 74 if max. stroke length is exceeded.
- Note 3: Refer to page 1299 for min. stroke length with switch.
- Note 4: When selecting TA or TB for mounting, the number of switches is limited to "H" (one on head end) for TA, and "R" (one on rod end) for TB.
- Note 5: Refer to the dimensions for position indication of cushion needle.
- Note 6: "I and "Y" can not be selected at the same time.
- Note 7: Refer to Ending 89 for custom specifications of rod end form.

<Example of model number>

JSC3-LN-LB-125B-50-R0-R-S-I

Model: Brake cylinder double acting oil-free type

- A** Mounting style : Axial foot type
- B** Bore size : φ125mm
- C** Port thread type : Rc thread
- D** Cushion : Both sides cushioned
- E** Stroke length : 50mm
- F** Switch model no. : Reed switch R0
- G** Switch quantity : One on rod end
- H** Option : Cushion needle position S
- I** Accessory : Rod eye

Symbol	Descriptions
A Mounting style	
LB	Axial foot type
FA	Rod end flange type
FB	Head end flange type
CA	Eye bracket type
CB	Clevis bracket type (pin and snap ring attached)
TC	Center trunnion type
TA	Rod end trunnion type
TB	Head end trunnion type

B Bore size (mm)	
125	φ125
140	φ140
160	φ160
180	φ180

C Port thread type	
Blank	Rc thread
N	NPT thread (custom order)
G	G thread (custom order)

D Cushion	
B	Both sides cushioned
R	Rod end cushion
H	Head end cushion
N	No cushion

E Stroke length (mm)			
Bore size	Stroke length Note 3	Available stroke length	Custom stroke length
φ125	1 to 800	2000	1 mm increment
φ140	1 to 800	2000	
φ160	1 to 800	2000	
φ180	1 to 900	2000	

F Switch model no.					
Grommet Type	Terminal box type		Contact	Indicator	Lead wire
	Standard type	Splash-proof			
R1K*	R1KB	R1KA	Proximity	1 color indicator type	2-wire
R2K*	R2KB	R2KA		2 color indicator type	
R2YK*	R2YKB	R2YKA		Strong magnetic field proof switch	
T2YDPT*	--	--		1 color indicator type	
R3K*	R3KB	R3KA	2 color indicator type		
R3YK*	R3YKB	R3YKA	Reed	1 color indicator type	2-wire
R0*	R0B	R0A		W/o indicator light	
R4*	R4B	R4A		1 color indicator type	
R5*	R5B	R5A		1 color indicator type	
R6*	R6B	R6A			


*Lead wire length	
Blank	1m (standard)
3	3m (option)
5	5m (option)

G Switch quantity	
R	One on rod end
H	One on rod head
D	Two
T	Three
4	Four (If more than 4 switches, indicate switch quantity.)

H Option			
		Max. ambient temperature	Instantaneous max. temperature
J	Bellows	60 °C	100 °C
K	Bellows	100 °C	200 °C
L	Bellows	250 °C	400 °C
M	Piston rod material (stainless steel)		
Blank	Cushion needle position R (standard)		
S	Cushion needle position S		
T	Cushion needle position T		
C2	Cushion mechanism with check valve		


I Accessory	
I	Rod eye
Y	Rod clevis (pin and snap ring attached)
B1	Eye bracket
B2	Clevis bracket (pin and snap ring attached)

How to order brake unit

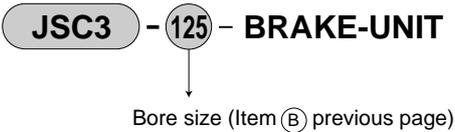


How to order R type switch


● Switch body + mounting bracket

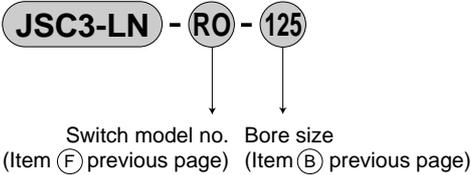


● Only switch body

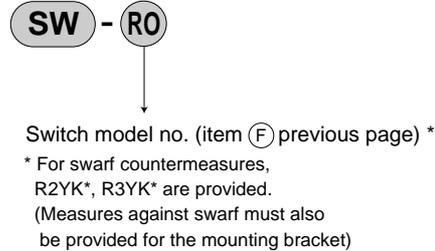

● Mounting bracket

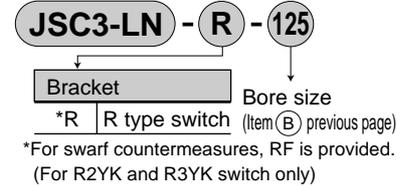


● Only terminal box



How to order T2YD type switch.


● Switch body + mounting bracket

· φ 125 to φ 180

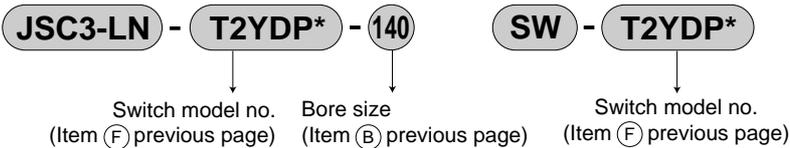


● Only switch body

· φ 125 to φ 180

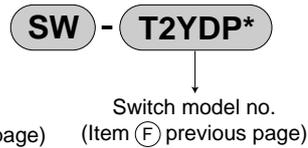

● Mounting bracket

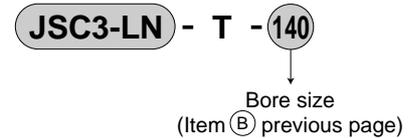

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake

● $\phi 40$ to $\phi 100$


Mounting bracket material

Mounting style	Material	Remarks
LB	Steel	Paint
FA/FB	Steel	Paint
CA/CB	Cast iron	Paint
TC	Cast iron	Paint

Release bolt size (hexagon socket head cap bolt)

Bore size	Size	
	JSC3	JSC3-V
$\phi 40, \phi 50$	M10 x 8	M10 x 29
$\phi 63$	M12 x 9	M12 x 30
$\phi 80$	M14 x 10	M14 x 31
$\phi 100$	M16 x 12	M16 x 40


Manual brake release method

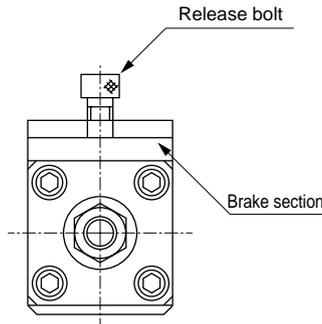

Note: Method of brake release

- The brakes are released by screwing the release bolt (enclosed with product) into the female threads (side of brake release port) on the top of the brakes in two to three rotations.
(Remove the release bolt during normal use.)
- Use the release bolt enclosed with the product when manually releasing the brakes. The brakes could be damaged when other bolts are used.

Internal structure and parts list

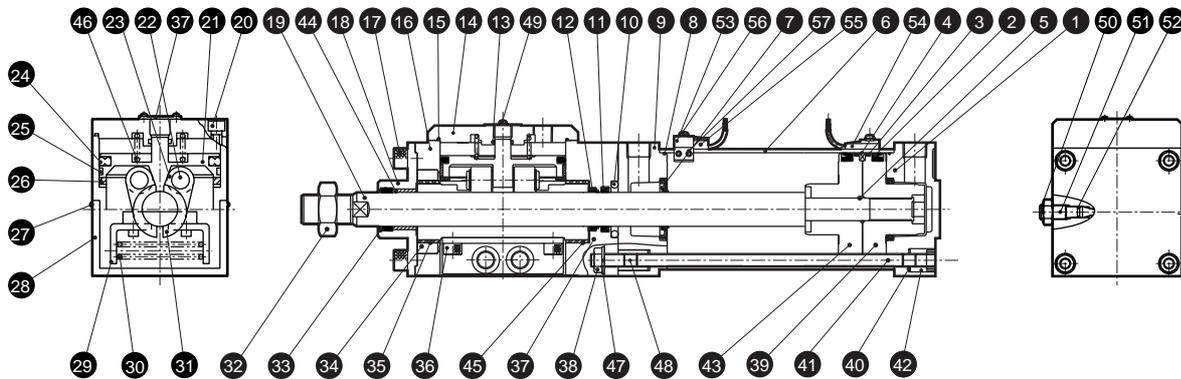

Products No.	Parts name	Material	Remarks	Products No.	Parts name	Material	Remarks
1	Head cover	Aluminum alloy die-casting	Paint	28	Cover	Steel	Paint
2	Piston packing seal	Nitrile rubber		29	Spring holder	Steel	Zinc chromate
3	Wear ring	Polyacetal resin		30	Spring	Steel	
4	Magnet	Plastic		31	Brake shoe metal	Cast iron	Nickeling
5	Piston gasket	Nitrile rubber		32	Rod nut	Steel	Zinc chromate
6	Cylinder tube	Aluminum alloy	Hard alumite	33	Dust wiper	Nitrile rubber	
7	Cushion packing seal	Nitrile rubber		34	DU ring	Steel	Blackening
8	Cylinder gasket	Nitrile rubber		35	Bush	Oil impregnated bearing alloy	
9	Rod cover	Aluminum alloy die-casting	Paint	36	Hexagon socket head cap bolt	Alloy steel	Blackening
10	Metal seal	Nitrile rubber		37	Dust cover	Aluminum alloy	Paint
11	Rod packing seal	Nitrile rubber		38	Hexagon nut	Steel	Blackening
12	Dust wiper	Nitrile rubber		39	Piston H	Aluminum alloy die-casting	
13	Cap gasket A	Nitrile rubber		40	Tie rod	Steel	Zinc chromate
14	Main body cap	Cast iron	Nitriding	41	Conical spring washer	Steel	Blackening
15	Cap gasket B	Nitrile rubber		42	Round nut	Steel	Zinc chromate
16	Brake	Aluminum alloy casting	Alumite	43	Piston R	Aluminum alloy die-casting	
17	Hexagon socket head cap bolt	Alloy steel	Blackening	44	Bush B	Oil impregnated bearing alloy	
18	Rod bushing	Steel	Phosphoric acid mangan	45	Thrust washer		
19	Piston rod	Steel	Industrial chrome plating	46	Spring	Steel	Paint
20	Hexagon socket head cap bolt	Alloy steel	Blackening	47	Toothed washer	Steel	Blackening
21	Piston for brake	Cast iron	Phosphoric acid mangan	48	Hexagon socket head set screw	Alloy steel	Blackening
22	Parallel pin	Steel		49	Washer assembly cross headed pan	Steel	Zinc chromate
23	Bearing			50	Cushion needle	Copper alloy	
24	Piston packing seal B	Nitrile rubber		51	Needle nut	Copper alloy	
25	Wear ring	Polyacetal resin		52	Needle gasket	Nitrile rubber	
26	Cushion rubber	Urethane rubber		With switch			
27	Cross headed pan	Steel	Zinc chromate	53	Switch installation unit	Aluminum alloy	
				54	Switch holder	Aluminum alloy	
				55	Cross headed pan	Steel	Zinc chromate
				56	Hexagon socket head set screw	Alloy steel	Blackening
				57	Cylinder switch		

Repair parts list

Bore size (mm)	Kit No.	Repair parts number
$\phi 40$	JSC3-40K	
$\phi 50$	JSC3-50K	2 3 7 8
$\phi 63$	JSC3-63K	
$\phi 80$	JSC3-80K	10 11 12 33 55
$\phi 100$	JSC3-100K	

Note: Specify the kit No. when placing an order.

● ϕ 125 to ϕ 180


Mounting bracket material

Mounting style	Material	Remarks
LB	Steel	Paint
FA	Carbon steel	Phosphate coating
CA	Cast iron	Paint
CB	Cast iron	Paint
TC/TA/TB	Cast iron	Paint
FB	Carbon steel	Paint

Release bolt size (hexagon socket head cap bolt)

Bore size	Size
ϕ 125	M24 x 16 and over
ϕ 140	M24 x 20 and over
ϕ 160	M24 x 20 and over
ϕ 180	M24 x 24 and over


Manual brake release method

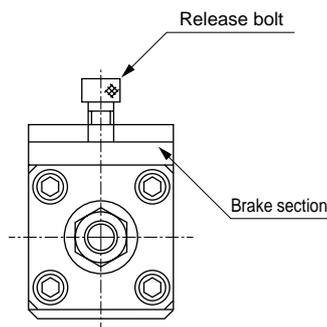

Note: Method of brake release

- The brakes are released by screwing the release bolt (enclosed with product) into the female threads (side of brake release port) on the top of the brakes in two to three rotations.
- (Remove the release bolt during normal use.)
- Use the release bolt enclosed with the product when manually releasing the brakes. The brakes could be damaged when other bolts are used.

Internal structure and parts list

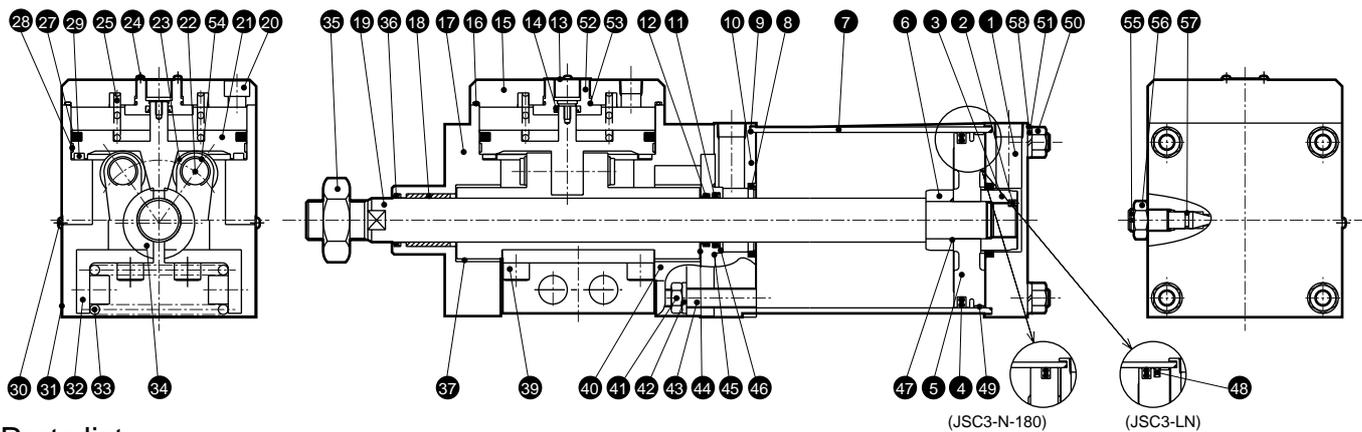

Parts list

No.	Parts name	Material	Remarks	No.	Parts name	Material	Remarks
1	Head cover	Steel	Zinc chromate	29	Cushion rubber	Urethane rubber	
2	Hexagon socket head set screw	Alloy steel	Blackening	30	Cross headed pan	Steel	Zinc chromate
3	Cushion ring (A)	Steel	Zinc chromate	31	Cover	Steel	Paint
4	Piston packing seal	Nitrile rubber		32	Spring holder	Steel	Phosphoric acid mangan
5	Piston	ϕ 125 to ϕ 160 Aluminum alloy, ϕ 180 Cast iron		33	Spring	Steel	Blackening
6	Cushion ring (B)	Steel	Zinc chromate	34	Brake shoe metal	Cast iron	Nickeling
7	Cylinder tube	Steel	Paint, industrial chrome plating	35	Rod nut	Steel	Zinc chromate
8	Cushion packing seal	Nitrile rubber, steel		36	Dust wiper	Nitrile rubber	
9	Cylinder gasket	Nitrile rubber		37	Bush A	DU dry bearing	
10	Rod cover	Steel	Zinc chromate	39	Hexagon socket head cap bolt	Alloy steel	Blackening
11	Rod packing seal	Nitrile rubber		40	Ring	Steel	Blackening
12	Dust wiper	Nitrile rubber		41	Hexagon nut	Steel	Zinc chromate
13	Dust cover	Aluminum alloy	Alumite	42	Toothed washer	Steel	Zinc chromate
14	Rod packing seal	Nitrile rubber		43	Tie rod	Steel	Zinc chromate
15	Main body cap	Cast iron	Alumite	44	Thrust washer	Steel	
16	Cap gasket	Nitrile rubber		45	Metal gasket	Nitrile rubber	
17	Brake	Aluminum casting	Alumite	46	Rod bushing	Cast iron	Zinc chromate
18	Bush B	Oil impregnated bearing alloy		47	Piston gasket	Nitrile rubber	
19	Piston rod	Steel	Industrial chrome plating	48	Magnet	Rubber	Only JSC3-LN
20	Hexagon socket head cap bolt	Alloy steel	Blackening	49	Wear ring	Polyacetal resin	
21	Piston for brake	Cast iron	Phosphoric acid mangan	50	Hexagon nut	Steel	Zinc chromate
22	Bearing pin	Steel		51	Spring washer	Steel	Zinc chromate
23	Bearing	-		52	Main body cap	Cast iron	Phosphoric acid mangan
24	Washer assembly cross headed pan	Steel	Zinc chromate	53	O ring	Nitrile rubber	
25	Spring	Steel	Paint	54	E type snap ring	Steel	Zinc chromate
27	Piston packing seal B	Nitrile rubber		55	Cushion needle	Steel	Zinc chromate
28	Wear ring	Polyacetal resin		56	Needle nut	Steel	Zinc chromate
				57	Needle gasket	Nitrile rubber	
				58	Plain washer	Steel	Zinc chromate

Note 1: With JSC3-LN-125 to 160, the (7) cylinder tube is made of aluminum alloy, and the (48) magnet is built in.

Note 2: With JSC3-LN-180, the (5) piston and (7) cylinder tube are made of aluminum alloy, and the (48) magnet and (49) wear ring are built in.

Repair parts list

● JSC3-LN/JSC3-N (excluding ϕ 180)

Bore size (mm)	Kit No.	Repair parts number
ϕ 125	JSC3-N-125K	4 8 9 11 12
ϕ 140	JSC3-N-140K	4 8 9 11 12
ϕ 160	JSC3-N-160K	36 45 49 57
ϕ 180	JSC3-LN-180K	36 45 49 57

● JSC3-N


Bore size (mm)	Kit No.	Repair parts number
ϕ 180	JSC3-N-180K	4 8 9 11 12 36 45 57

SCP*2
 CMK2
 CMA2
 SCM
 SCG
 SCA2
 SCS
 CKV2
 CA/OV2
 SSD
 CAT
 MDC2
 MVC
 SMD2
 MSD*
 FC*
 STK
 ULK*
 JSK/M2
 JSG
JSC3
 USSD
 USC
 JSB3
 LMB
 STG
 STS/L
 LCS
 LCG
 LCM
 LCT
 LCY
 STR2
 UCA2
 HCM
 HCA
 SRL2
 SRG
 SRM
 SRT
 MRL2
 MRG2
 SM-25
 CAC3
 UCAC
 RCC2
 MFC
 SHC
 GLC
 Ending

Brake cylinder (medium and large bore size)
 With brake

Dimensions (φ40 to φ100)

Basic type (00)

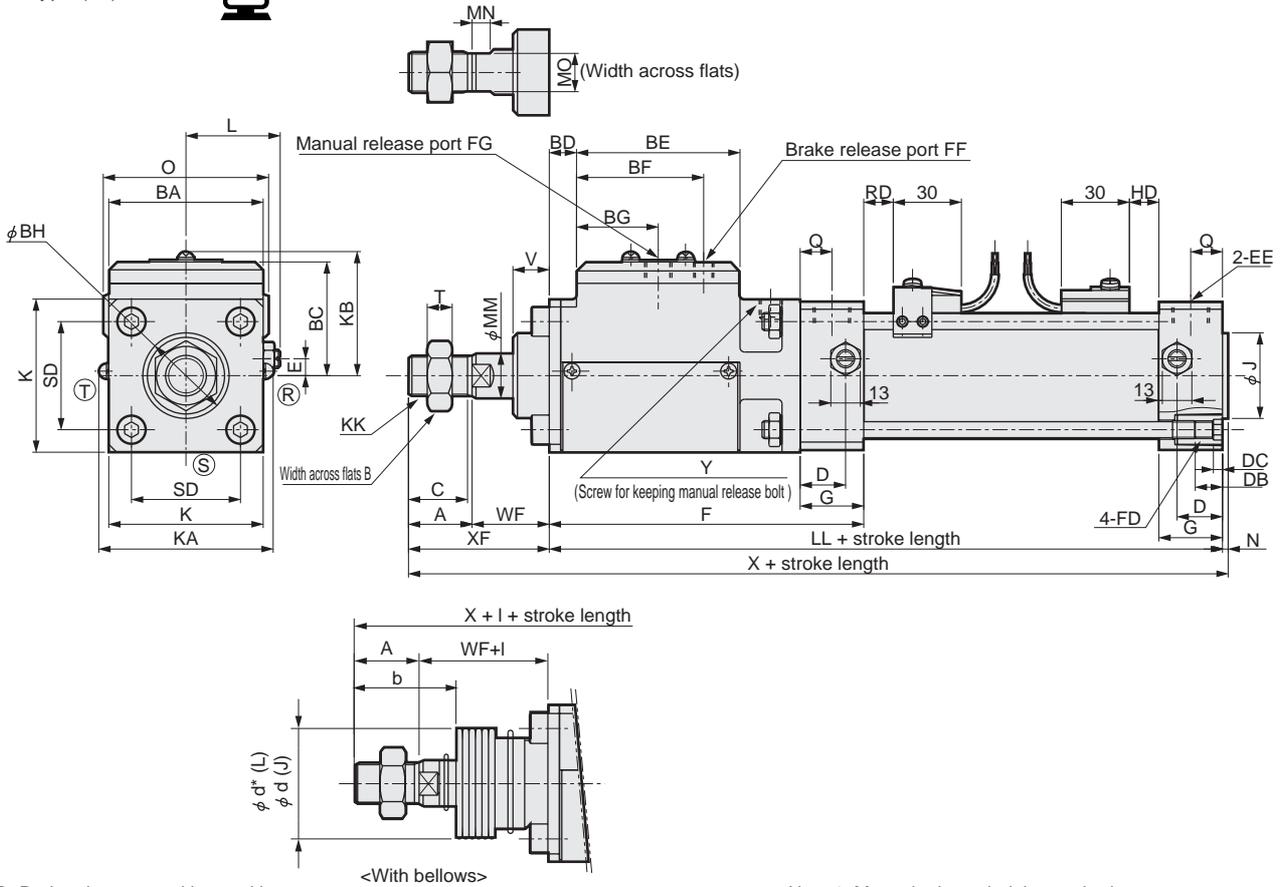

RD: Rod end max. sensitive position
 HD: Head end max. sensitive position Note: (R) (S) (T) indicates a cushion needle position.

Note 1: Manual release bolt is attached.
 Note 2: Refer to pages 1351, 1352 for the accessory dimensions.

Symbol	Basic type (00) basic dimensions																					
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	BH	C	D	DA	DB	DC	E	EE	F	FF	FG	G	J	K
φ 40	22	22	57	46	9	61	51	31	31	20	18	M8	12	4	7.5	Rc1/4	121	Rc1/8	M10	26	31	57
φ 50	28	27	68	50.5	12	72	56	36	38	26	20	M8	12	4	0	Rc3/8	138.5	Rc1/8	M10	28	38	68
φ 63	28	27	80	54	13	86	70	43	38	26	22	M8	12	4	0	Rc3/8	154	Rc1/4	M12	30	38	80
φ 80	36	32	98	66	13	106	80	53	43	34	26	M12	16	5	0	Rc1/2	179.5	Rc1/4	M14	34	43	98
φ 100	45	41	118	74	17.5	132	101	66	51	43	28	M12	16	5	0	Rc1/2	220.5	Rc3/8	M16	36	51	118

Symbol	With switch																						
Bore size (mm)	KA	KB	KK	L	LL	MM	MN	MO	N	Q	SD	T	V	WF	X	XF	Y	T0, T5, T2, T3			T1, T2Y, T3Y, T2YFM, T3YFM		
	O	RD	HD	O	RD	HD	O	RD	HD	A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
φ 40	66	50.5	M14 x 1.5	38 to 39.5	188	16	8	14	2	13	40.5	8	15	30	242	52	M10 depth 9	66	11	11	66	10	10
φ 50	77	55	M18 x 1.5	41.0 to 43.5	211.5	20	8	17	2.5	14	48	11	16	34	276	62	M10 depth 9	73	13	13	73	12	12
φ 63	89	58.5	M18 x 1.5	47.5 to 50.0	229	20	8	17	3	15	59	11	16	30	290	58	M12 depth 10	85	13	13	85	12	12
φ 80	107	70.5	M22 x 1.5	56 to 59	261.5	25	11	22	3.5	17	74	13	17.5	43.5	344.5	79.5	M14 depth 11	105	14.5	14.5	105	13.5	13.5
φ 100	127	78.5	M26 x 1.5	66 to 69	312.5	30	13	27	4	18	90	16	26	48	409.5	93	M16 depth 13	121	18.5	18.5	121	17.5	17.5


Symbol	With bellows										ℓ												
Bore size (mm)	T8			T2YD			H0*			A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
	O	RD	HD	O	RD	HD	O	RD	HD	A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
φ 40	66	5	5	66	10	10	66	4	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length(3.0) + 8
φ 50	73	7	7	73	12	12	73	6	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5
φ 63	85	7	7	84	12	12	84	6	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5
φ 80	105	8.5	8.5	104	13.5	13.5	104	7.5	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length(4.3) + 2.5
φ 100	121	12.5	12.5	120	17.5	17.5	120	11.5	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length(4.5) + 9

Note: ℓ dimensions below decimal point are rounded up.

Dimensions (φ40 to φ100)



● Axial foot type (LB)

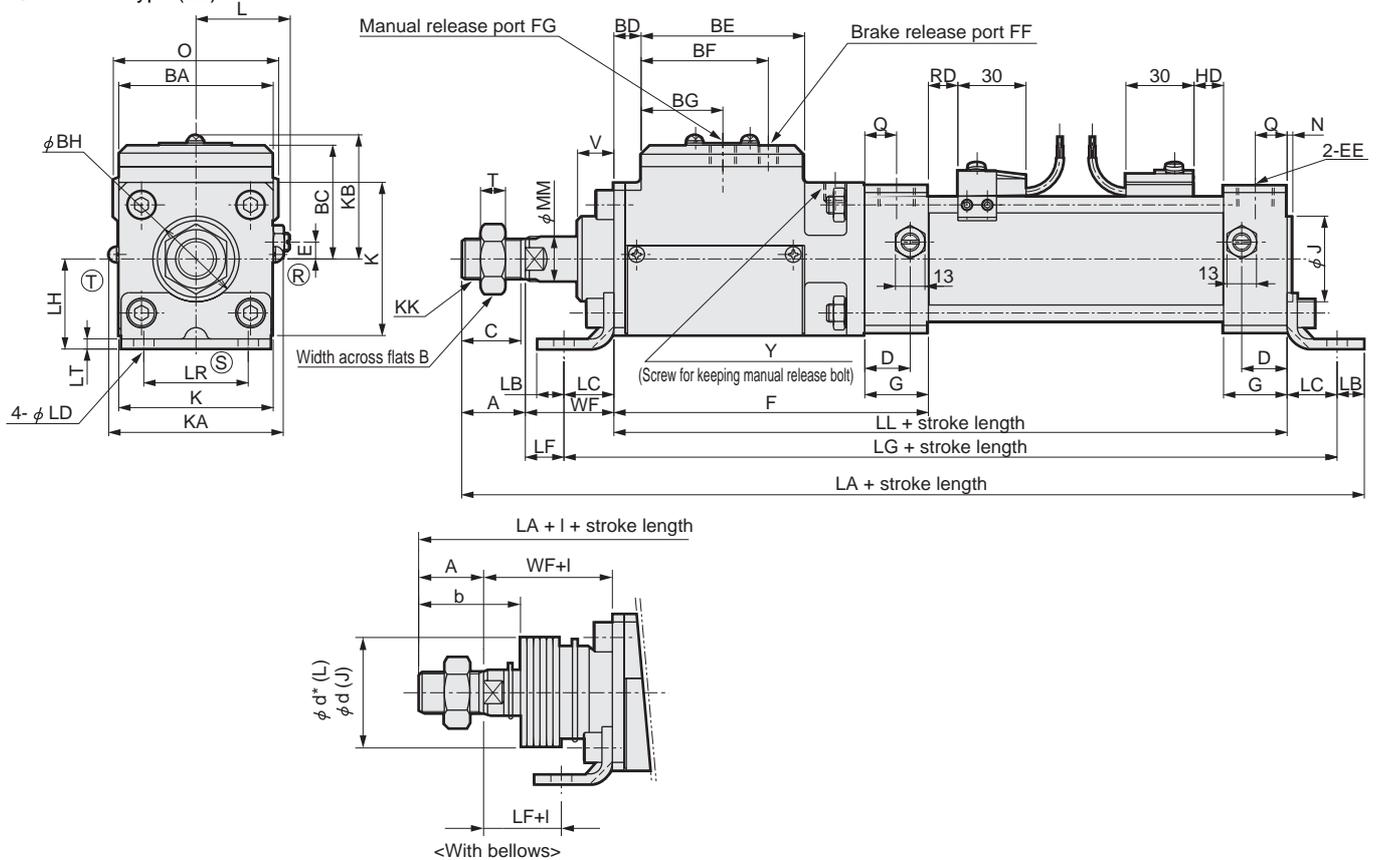

Note 1: (R) (S) (T) indicates a cushion needle position.

Note 2: Manual release bolt is attached.

Note 3: Refer to page 1351, 1352 for accessory dimensions.

Symbol		Axial foot type (LB) basic dimensions																				
Bore size (mm)		A	B	BA	BC	BD	BE	BF	BG	BH	C	D	E	EE	F	FG	FF	G	J	K	KA	KB
φ 40		22	22	57	46	9	61	51	31	31	20	18	7.5	Rc1/4	121	M10	Rc1/8	26	31	57	66	50.5
φ 50		28	27	68	50.5	12	72	56	36	38	26	20	0	Rc3/8	138.5	M10	Rc1/8	28	38	68	77	55
φ 63		28	27	80	54	13	86	70	43	38	26	22	0	Rc3/8	154	M12	Rc1/4	30	38	80	89	58.5
φ 80		36	32	98	66	13	106	80	53	43	34	26	0	Rc1/2	179.5	M14	Rc1/4	34	43	98	107	70.5
φ 100		45	41	118	74	17.5	132	101	66	51	43	28	0	Rc1/2	220.5	M16	Rc3/8	36	51	118	127	78.5

Symbol												Installation dimensions							With switch						
Bore size (mm)		KK	L	LL	MM	N	Q	T	V	WF	Y	LA	LB	LC	LD	LG	LH	LR	LT	T0, T5, T2, T3	T1, T2Y, T3Y, T2YFM, T3YFM	O	RD	HD	
φ 40		M14 x 1.5	38 to 39.5	188	16	2	13	8	15	30	M10 depth 9	269.5	10	19.5	9	227	40	40	3.2	66	11	11	66	10	10
φ 50		M18 x 1.5	41.0 to 43.5	211.5	20	2.5	14	11	16	34	M10 depth 9	307.5	12	22	9	255.5	40	46	4.5	73	13	13	73	12	12
φ 63		M18 x 1.5	47.5 to 50.0	229	20	3	15	11	16	30	M12 depth 10	329	12	30	11	289	50	60	4.5	85	13	13	85	12	12
φ 80		M22 x 1.5	56 to 59	261.5	25	3.5	17	13	17.5	43.5	M14 depth 11	392	14	37	14	335.5	60	74	6.0	105	14.5	14.5	105	13.5	13.5
φ 100		M26 x 1.5	66 to 69	312.5	30	4	18	16	26	48	M16 depth 13	457.5	21	31	14	374.5	67	80	6.0	121	18.5	18.5	121	17.5	17.5

Symbol												With bellows					ℓ									
Bore size (mm)		T8			T2YD			H0*			A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over		
	O	RD	HD	O	RD	HD	O	RD	HD	Stroke length(3.0) + 8							Stroke length(3.6) + 7.5	Stroke length(3.6) + 7.5	Stroke length(4.3) + 2.5	Stroke length(4.5) + 9						
φ 40		66	5	5	66	10	10	66	4	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length(3.0) + 8)		
φ 50		73	7	7	73	12	12	73	6	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5)		
φ 63		85	7	7	84	12	12	84	6	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5)		
φ 80		105	8.5	8.5	104	13.5	13.5	104	7.5	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length(4.3) + 2.5)		
φ 100		121	12.5	12.5	120	17.5	17.5	120	11.5	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length(4.5) + 9)		

Note: ℓ dimensions below decimal point are rounded up.


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

Dimensions (φ40 to φ100)



● Rod end flange type (FA)

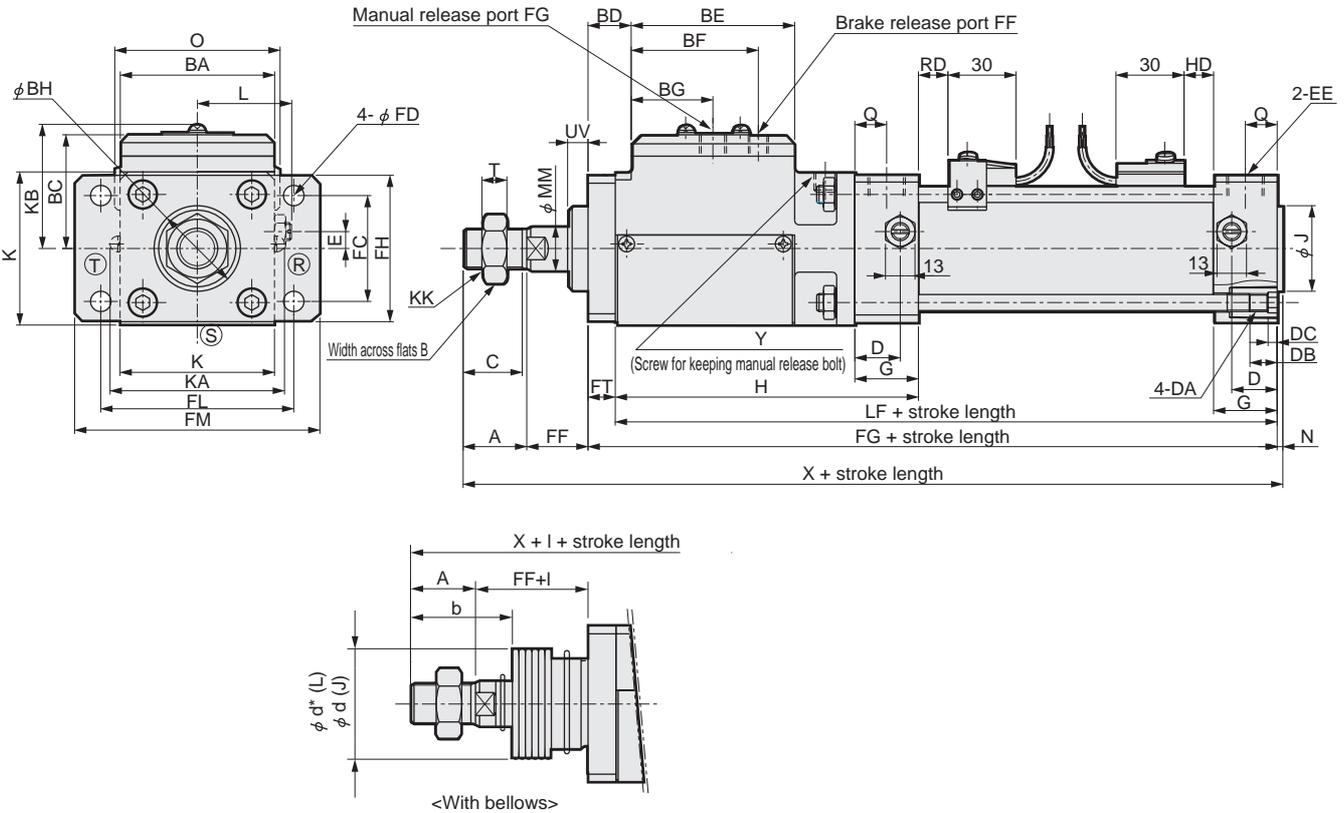

- Note 1: ① ② ③ indicates a cushion needle position.
- Note 2: The rod metal is not fixed, so conversion to the head side flange is not possible.
- Note 3: Manual release bolt is attached.
- Note 4: Refer to page 1351, 1352 for accessory dimensions.

Symbol	Rod end flange type (FA) basic dimensions																						
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	BH	C	D	DA	DC	DB	E	EE	FF*	FG	G	H	J	K	KA
φ 40	22	22	57	46	17	61	51	31	31	20	18	M8	4	12	7.5	Rc1/4	Rc1/8	M10	26	117	31	57	66
φ 50	28	27	68	50.5	19.5	72	56	36	38	26	20	M8	4	12	0	Rc3/8	Rc1/8	M10	28	134	38	68	77
φ 63	28	27	80	54	21	86	70	43	38	26	22	M8	4	12	0	Rc3/8	Rc1/4	M12	30	146	38	80	89
φ 80	36	32	98	66	27	106	80	53	43	34	26	M12	5	16	0	Rc1/2	Rc1/4	M14	34	173.5	43	98	107
φ 100	45	41	118	74	30	132	101	66	51	43	28	M12	5	16	0	Rc1/2	Rc3/8	M16	36	214.5	51	118	127

Symbol	Installation dimensions										With switch														
Bore size (mm)	KB	KK	L	LF	MM	N	Q	T	UV	X	Y	FC	FD	FF	FH	FJ	FL	FM	FT	T0, T5, T2, T3			T1, T2Y, T3Y, T2YFM, T3YFM		
	O			RD	HD	O			RD	HD	O			RD	HD	O			RD	HD					
φ 40	50.5	M14 x 1.5	38 to 39.5	184	16	2	13	8	7	242	M10 depth 9	40	9	22	57	196	80	100	12	66	11	11	66	10	10
φ 50	55	M18 x 1.5	41.0 to 43.5	207	20	2.5	14	11	8.5	276	M10 depth 9	47	9	26.5	65	219	85	108	12	73	13	13	73	12	12
φ 63	58.5	M18 x 1.5	47.5 to 50.0	221	20	3	15	11	8	290	M12 depth 10	60	11	22	80	237	106	130	16	85	13	13	85	12	12
φ 80	70.5	M22 x 1.5	56 to 59	255.5	25	3.5	17	13	4.5	344.5	M14 depth 11	74	14	30.5	98	274.5	125	153	19	105	14.5	14.5	105	13.5	13.5
φ 100	78.5	M26 x 1.5	66 to 69	306.5	30	4	18	16	13	409.5	M16 depth 13	88	14	35	118	325.5	144	180	19	121	18.5	18.5	121	17.5	17.5


Symbol	With bellows										ℓ												
Bore size (mm)	T8			T2YD			H0*			A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
	O	RD	HD	O	RD	HD	O	RD	HD														
φ 40	66	5	5	66	10	10	66	4	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length(3.0))+8
φ 50	73	7	7	73	12	12	73	6	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length(3.6))+7.5
φ 63	85	7	7	84	12	12	84	6	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length(3.6))+7.5
φ 80	105	8.5	8.5	104	13.5	13.5	104	7.5	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length(4.3))+2.5
φ 100	121	12.5	12.5	120	17.5	17.5	120	11.5	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length(4.5))+9

Note: ℓ dimensions below decimal point are rounded up.

Dimensions (φ40 to φ100)



● Head end flange type (FB)

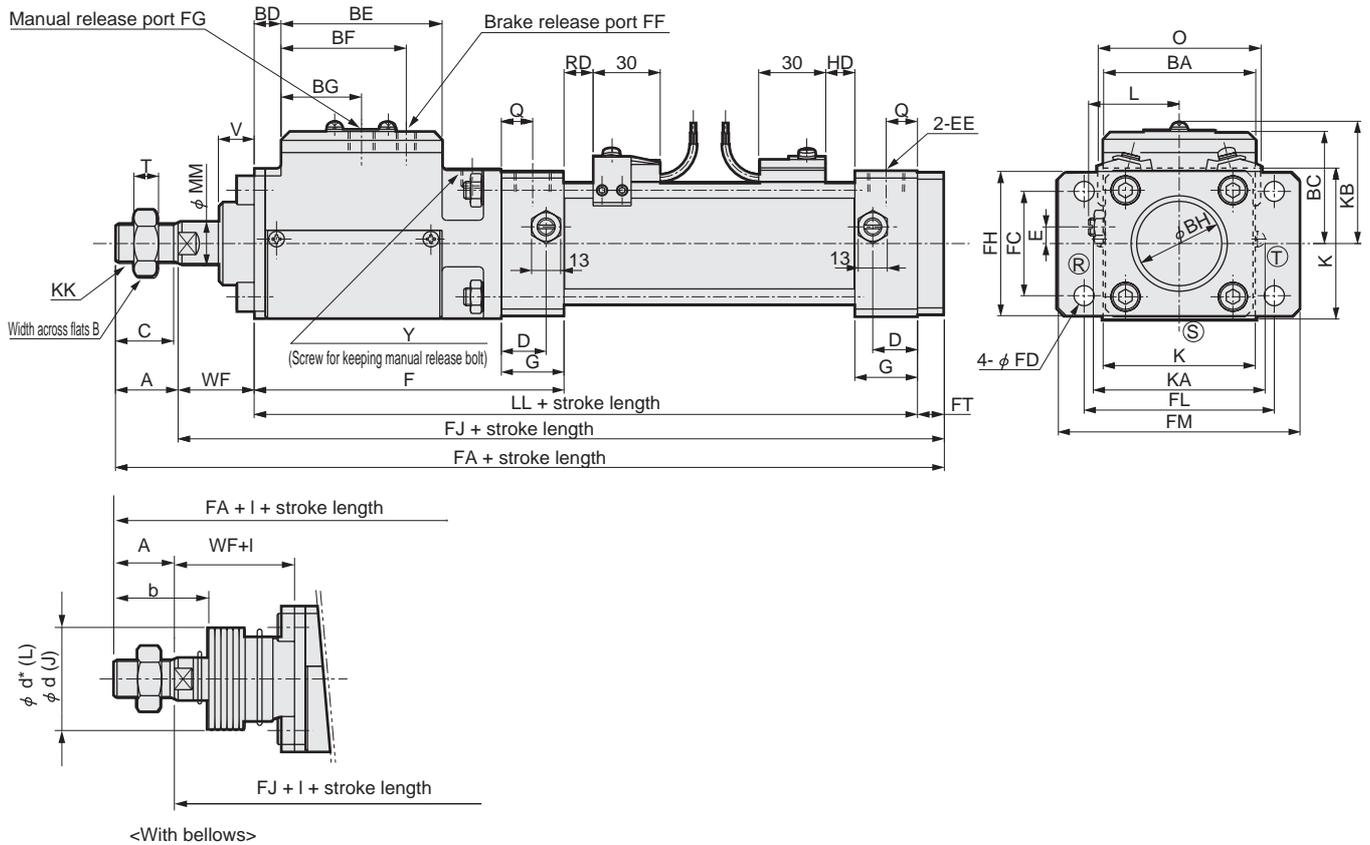

- Note 1: (R) (S) (T) indicates a cushion needle position.
- Note 2: The piston rod protrusion length (from flange end), rod metal and flange mounting bolt will change, so conversion to the rod side flange is not possible.
- Note 3: Manual release bolt is attached.
- Note 4: Refer to page 1351, 1352 for accessory dimensions.

Symbol	Head end flange type (FB) basic dimensions																			
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	BH	C	D	E	EE	F	FG	FF	G	K	KA	KB
φ 40	22	22	57	46	9	61	51	31	31	20	18	7.5	Rc1/4	121	M10	Rc1/8	26	57	66	50.5
φ 50	28	27	68	50.5	12	72	56	36	38	26	20	0	Rc3/8	138.5	M10	Rc1/8	28	68	77	55
φ 63	28	27	80	54	13	86	70	43	38	26	22	0	Rc3/8	154	M12	Rc1/4	30	80	89	58.5
φ 80	36	32	98	66	13	106	80	53	43	34	26	0	Rc1/2	179.5	M14	Rc1/4	34	98	107	70.5
φ 100	45	41	118	74	17.5	132	101	66	51	43	28	0	Rc1/2	220.5	M16	Rc3/8	36	118	127	78.5

Symbol											Installation dimensions						With switch						
Bore size (mm)	KK	L	LL	MM	Q	T	V	WF	Y	FA	FC	FD	FH	FJ	FL	FM	FT	T0, T5, T2, T3			T1, T2Y, T3Y, T2YFM, T3YFM		
																		O	RD	HD	O	RD	HD
φ 40	M14 x 1.5	38 to 39.5	188	16	13	8	15	30	M10 depth 9	252	40	9	57	230	80	100	12	66	11	11	66	10	10
φ 50	M18 x 1.5	41.0 to 43.5	211.5	20	14	11	16	34	M10 depth 9	285.5	47	9	65	257.5	85	108	12	73	13	13	73	12	12
φ 63	M18 x 1.5	47.5 to 50.0	229	20	15	11	16	30	M12 depth 10	303	60	11	80	275	106	130	16	85	13	13	85	12	12
φ 80	M22 x 1.5	56 to 59	261.5	25	17	13	17.5	43.5	M14 depth 11	360	74	14	98	324	125	153	19	105	14.5	14.5	105	13.5	13.5
φ 100	M26 x 1.5	66 to 69	312.5	30	18	16	26	48	M16 depth 13	424.5	88	14	118	379.5	144	180	19	121	18.5	18.5	121	17.5	17.5

Symbol											With bellows					ℓ									
Bore size (mm)	T8			T2YD			H0*			A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over		
	O	RD	HD	O	RD	HD	O	RD	HD																
φ 40	66	5	5	66	10	10	66	4	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length)3.0) + 8		
φ 50	73	7	7	73	12	12	73	6	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length)3.6) + 7.5		
φ 63	85	7	7	84	12	12	84	6	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length)3.6) + 7.5		
φ 80	105	8.5	8.5	104	13.5	13.5	104	7.5	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length)4.3) + 2.5		
φ 100	121	12.5	12.5	120	17.5	17.5	120	11.5	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length)4.5) + 9		

Note: ℓ dimensions below decimal point are rounded up.


SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake



Dimensions (φ40 to φ100)

● Special head end flange type (FC)

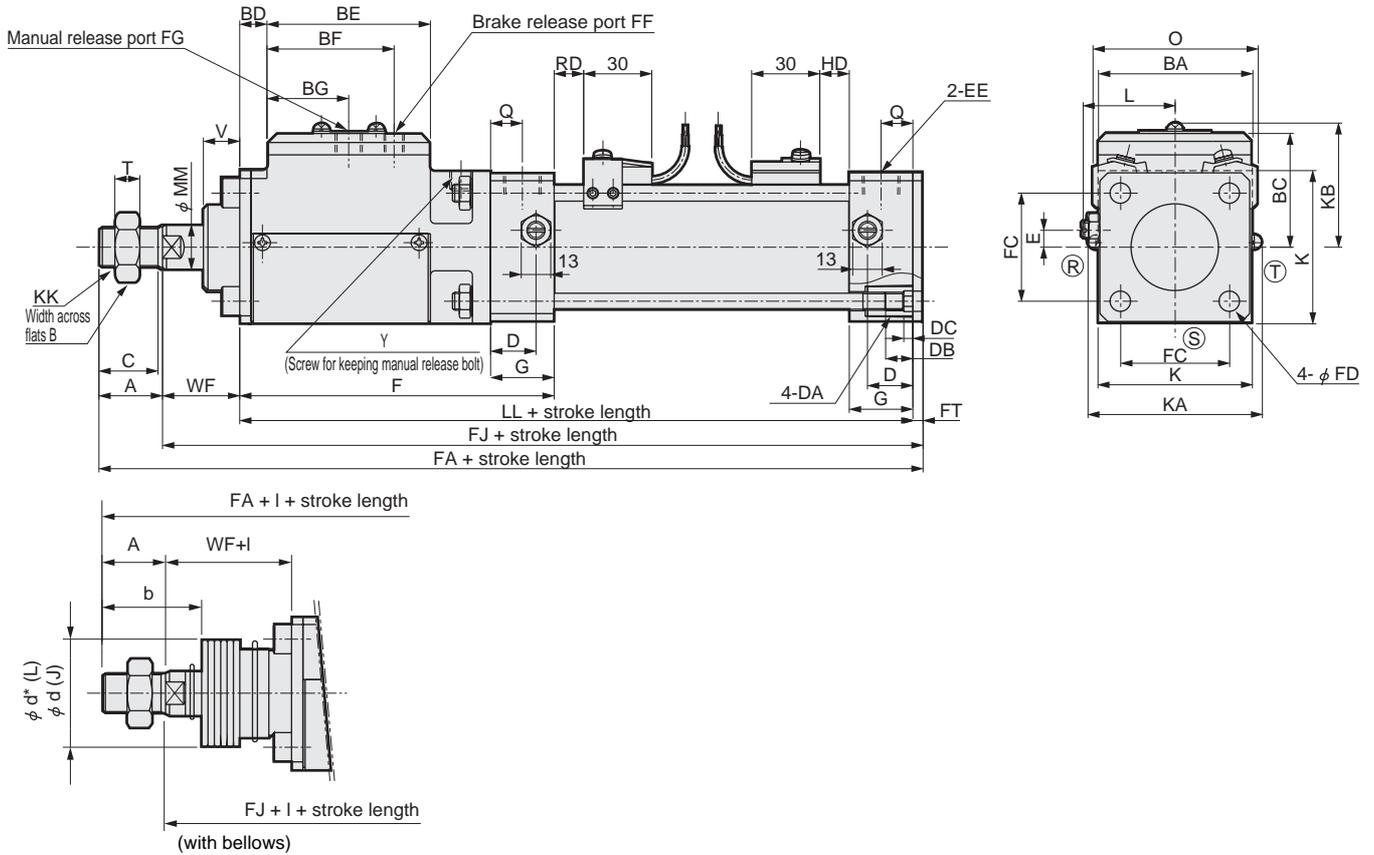

Note 1: (R) (S) (T) indicates a cushion needle position.
 Note 2: Manual release bolt is attached.
 Note 3: Refer to page 1351, 1352 for accessory dimensions.

Symbol	Head end flange type (FC) basic dimensions																				
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	C	D	DA	DB	DC	EE	F	FG	FF	G	K	KK	KA
φ 40	22	22	57	46	9	61	51	31	20	18	M8	12	4	Rc1/4	121	M10	Rc1/8	26	57	M14 x 1.5	66
φ 50	28	27	68	50.5	12	72	56	36	26	20	M8	12	4	Rc3/8	138.5	M10	Rc1/8	28	68	M18 x 1.5	77
φ 63	28	27	80	54	13	86	70	43	26	22	M8	12	4	Rc3/8	154	M12	Rc1/4	30	80	M18 x 1.5	89
φ 80	36	32	98	66	13	106	80	53	34	26	M12	16	5	Rc1/2	179.5	M14	Rc1/4	34	98	M22 x 1.5	107
φ 100	45	41	118	74	17.5	132	101	66	43	28	M12	16	5	Rc1/2	220.5	M16	Rc3/8	36	118	M26 x 1.5	127

Symbol	Installation dimensions										With switch									
Bore size (mm)	KB	L	LL	MM	Q	T	V	WF	Y	FA	FC	FD	FJ	FT	T0, T5, T2, T3			T1, T2Y, T3Y, T2YFM, T3YFM		
															O	RD	HD	O	RD	HD
φ 40	50.5	38 to 39.5	188	16	13	8	15	30	M10 depth 9	244.5	40.5	9	222.5	4.5	66	11	11	66	10	10
φ 50	55	41.0 to 43.5	211.5	20	14	11	16	34	M10 depth 9	278	48	9	250	4.5	73	13	13	73	12	12
φ 63	58.5	47.5 to 50.0	229	20	15	11	16	30	M12 depth 10	291.5	59	9	263.5	4.5	85	13	13	85	12	12
φ 80	70.5	56 to 59	261.5	25	17	13	17.5	43.5	M14 depth 11	347	74	14	311	6	105	14.5	14.5	105	13.5	13.5
φ 100	78.5	66 to 69	312.5	30	18	16	26	48	M16 depth 13	411.5	90	14	366.5	6	121	18.5	18.5	121	17.5	17.5


Symbol	Bore size (mm)	With bellows										ℓ												
		T8			T2YD			H0*			A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
		O	RD	HD	O	RD	HD	O	RD	HD														
φ 40	66	5	5	66	10	10	66	4	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length(3.0)+8	
φ 50	73	7	7	73	12	12	73	6	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length(3.6)+7.5	
φ 63	85	7	7	84	12	12	84	6	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length(3.6)+7.5	
φ 80	105	8.5	8.5	104	13.5	13.5	104	7.5	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length(4.3)+2.5	
φ 100	121	12.5	12.5	120	17.5	17.5	120	11.5	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length(4.5)+9	

Note: ℓ dimensions below decimal point are rounded up.

Dimensions (φ40 to φ100)



● Eye bracket type (CA)

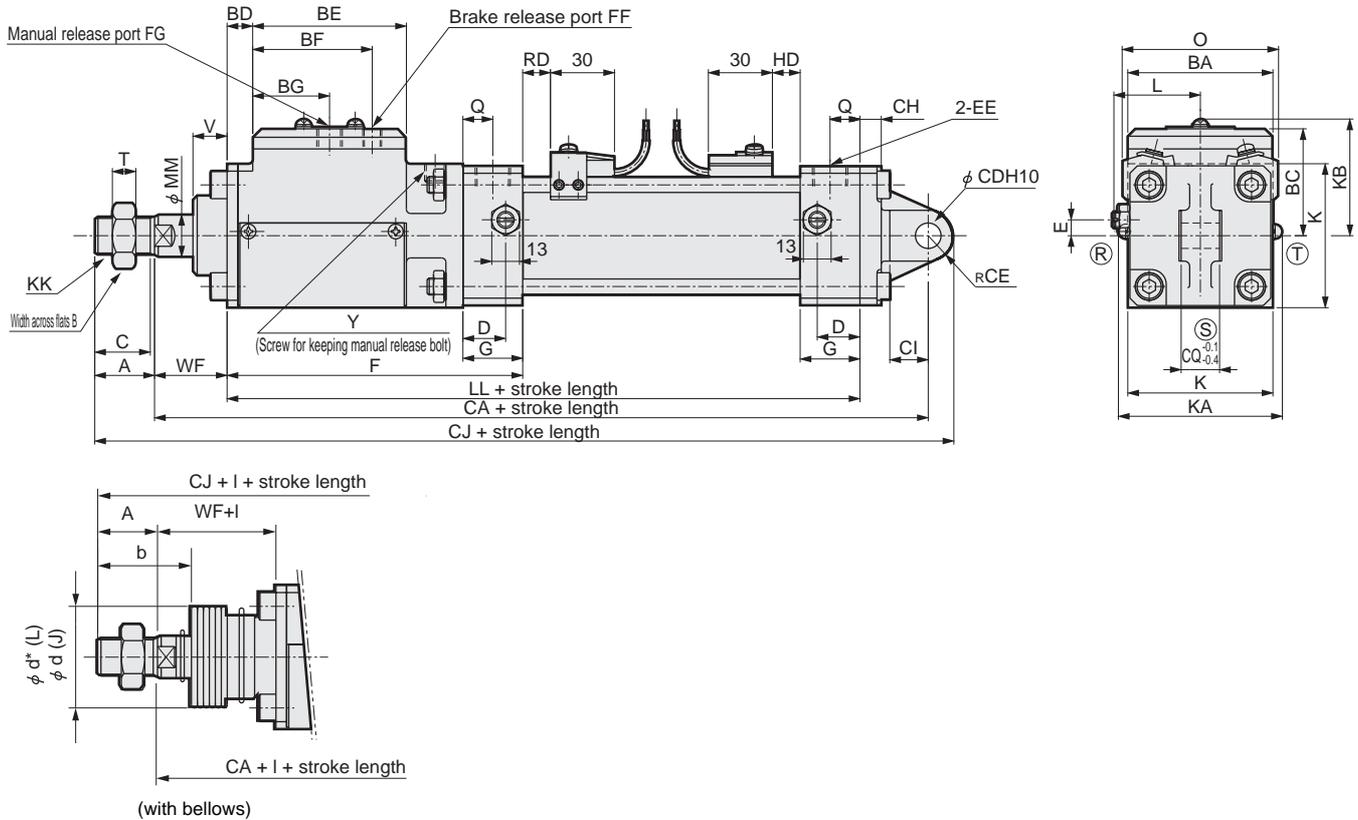

Note 1: (R) (S) (T) indicates a cushion needle position.
Note 2: Refer to page 1351, 1352 for accessory dimensions.

Symbol	Eye bracket type (CA) basic dimensions																		
	A	B	BA	BC	BD	BE	BF	BG	C	D	E	EE	F	FF	FG	G	K	KK	KA
φ 40	22	22	57	46	9	61	51	31	20	18	7.5	Rc1/4	121	Rc1/8	M10	26	57	M14 x 1.5	66
φ 50	28	27	68	50.5	12	72	56	36	26	20	0	Rc3/8	138.5	Rc1/8	M10	28	68	M18 x 1.5	77
φ 63	28	27	80	54	13	86	70	43	26	22	0	Rc3/8	154	Rc1/4	M12	30	80	M18 x 1.5	89
φ 80	36	32	98	66	13	106	80	53	34	26	0	Rc1/2	179.5	Rc1/4	M14	34	98	M22 x 1.5	107
φ 100	45	41	118	74	17.5	132	101	66	43	28	0	Rc1/2	220.5	Rc3/8	M16	36	118	M26 x 1.5	127

Symbol	Installation dimensions										With switch											
	KB	L	LL	MM	Q	T	V	WF	Y	CA	CD	CE	CH	CI	CJ	CQ	O	RD	HD	O	RD	HD
φ 40	50.5	38 to 39.5	188	16	13	8	15	30	M10 depth 9	250	12	12	10	18	284	18	66	11	11	66	10	10
φ 50	55	41.0 to 43.5	211.5	20	14	11	16	34	M10 depth 9	277.5	12	12	10	18	317.5	18	73	13	13	73	12	12
φ 63	58.5	47.5 to 50.0	229	20	15	11	16	30	M12 depth 10	296	14	16	10	24	340	20	85	13	13	85	12	12
φ 80	70.5	56 to 59	261.5	25	17	13	17.5	43.5	M14 depth 11	357	20	20	14	30	413	28	105	14.5	14.5	105	13.5	13.5
φ 100	78.5	66 to 69	312.5	30	18	16	26	48	M16 depth 13	412.5	20	20	16	30	477.5	28	121	18.5	18.5	121	17.5	17.5

Symbol	With bellows										ℓ												
	T8			T2YD			H0*			A	WF	FF	b	d	d*	50 or less	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over	
	O	RD	HD	O	RD	HD	O	RD	HD														
φ 40	66	5	5	66	10	10	66	4	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length(3.0) + 8
φ 50	73	7	7	73	12	12	73	6	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5
φ 63	85	7	7	84	12	12	84	6	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5
φ 80	105	8.5	8.5	104	13.5	13.5	104	7.5	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length(4.3) + 2.5
φ 100	121	12.5	12.5	120	17.5	17.5	120	11.5	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length(4.5) + 9

Note: ℓ dimensions below decimal point are rounded up.


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

Dimensions (φ40 to φ100)



● Rod end trunnion type (TA)

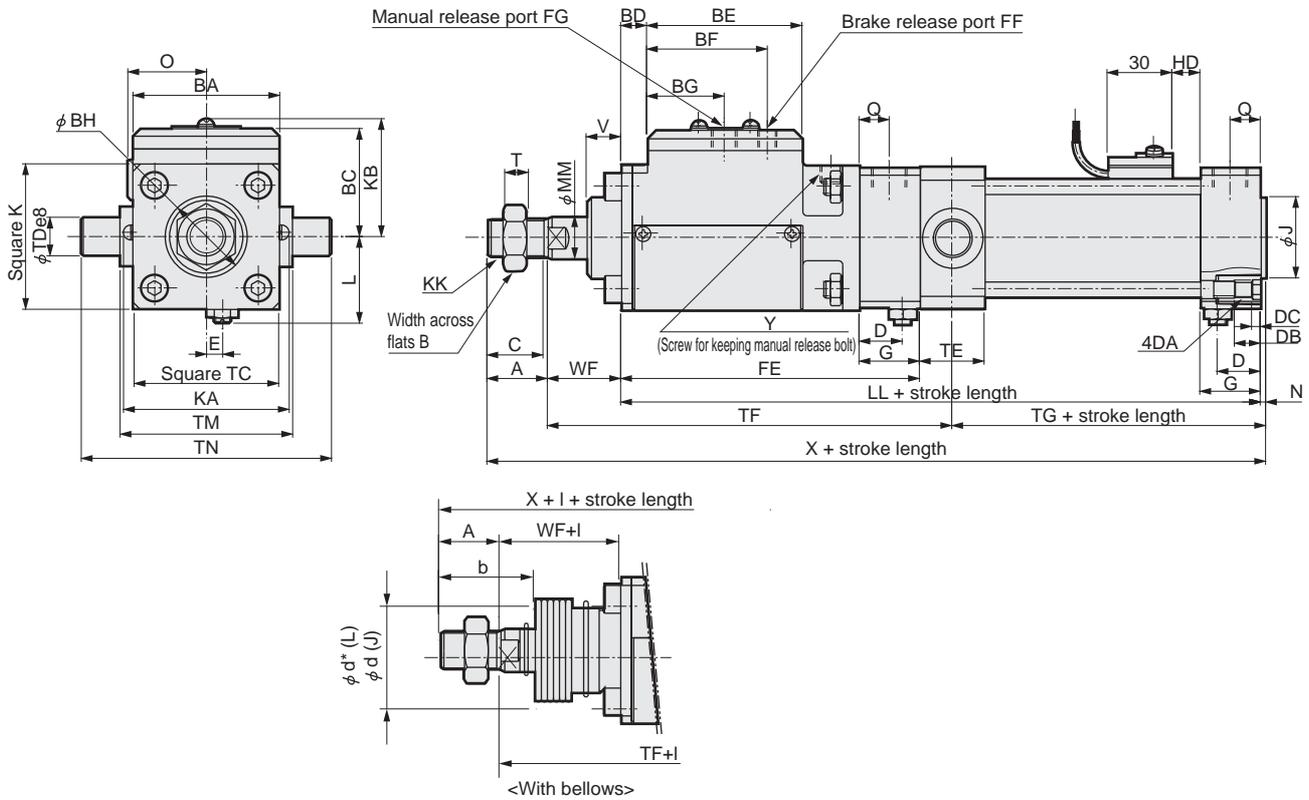

Note 1: A position can not be detected at rod side stroke end.
 Note 2: A cushion needle position can not be detected.
 Note 3: Refer to page 1351, 1352 for accessory dimensions.

Symbol	Rod end trunnion type (TA) basic dimensions																					
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	BH	C	D	DA	DB	DC	E	EE	FE	FF	FG	G	J	K
φ 40	22	22	57	46	9	61	51	31	31	20	18	M8	12	4	7.5	Rc1/4	121	Rc1/8	M10	26	31	57
φ 50	28	27	68	50.5	12	72	56	36	38	26	20	M8	12	4	0	Rc3/8	138.5	Rc1/8	M10	28	38	68
φ 63	28	27	80	54	13	86	70	43	38	26	22	M8	12	4	0	Rc3/8	154	Rc1/4	M12	30	38	80
φ 80	36	32	98	66	13	106	80	53	43	34	26	M12	16	5	0	Rc1/2	179.5	Rc1/4	M14	34	43	98
φ 100	45	41	118	74	17.5	132	101	66	51	43	28	M12	16	5	0	Rc1/2	220.5	Rc3/8	M16	36	51	118

Symbol	Installation dimensions																With switch						
Bore size (mm)	KA	KB	KK	L	LL	MM	N	Q	T	V	WF	X	Y	TC	TD	TE	TF	TG	TM	TN	T0, T5, T2, T3	O	HD
φ 40	66	50.5	M14 x 1.5	38 to 39.5	188	16	2	13	8	15	30	242	M10 depth 9	57	16	30	166.5	53.5	63	95	33	11	
φ 50	77	55	M18 x 1.5	41.0 to 43.5	211.5	20	2.5	14	11	16	34	276	M10 depth 9	67	18	30	188	60	80	116	36.5	13	
φ 63	89	58.5	M18 x 1.5	47.5 to 50.0	229	20	3	15	11	16	30	290	M12 depth 10	82	20	35	202	60	90	130	42.5	13	
φ 80	107	70.5	M22 x 1.5	56 to 59	261.5	25	3.5	17	13	17.5	43.5	344.5	M14 depth 11	100	25	40	243.5	65	115	165	52.5	14.5	
φ 100	127	78.5	M26 x 1.5	66 to 69	312.5	30	4	18	16	26	48	409.5	M16 depth 13	121	35	50	294	70.5	135	205	60.5	18.5	

Symbol	With bellows										ℓ											
Bore size (mm)	T1, T2, T3Y T2YF/M, T3YF/M		T8		T2YD		H0*		A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
	O	HD	O	HD	O	HD	O	HD														
φ 40	33	10	33	5	33	10	33	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length/3.0) + 8
φ 50	36.5	12	36.5	7	36.5	12	36.5	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length/3.6) + 7.5
φ 63	42.5	12	42.5	7	42	12	42	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length/3.6) + 7.5
φ 80	52.5	13.5	52.5	8.5	52	13.5	52	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length/4.3) + 2.5
φ 100	60.5	17.5	60.5	12.5	60	17.5	60	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length/4.5) + 9

Note: ℓ dimensions below decimal point are rounded up.


SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake



Dimensions (φ40 to φ100)

● Head end trunnion type (TB)

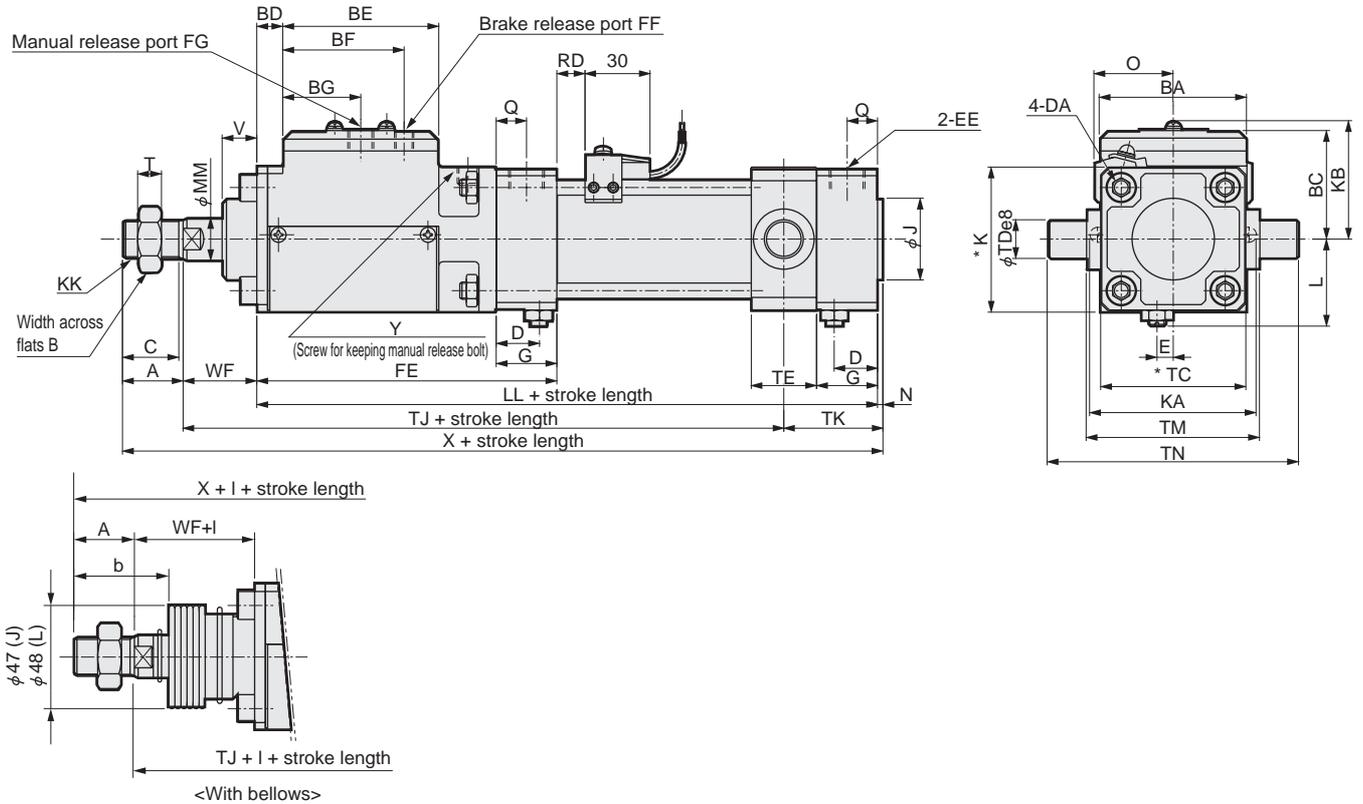

Note 1: A position can not be detected at head side stroke end.
 Note 2: A cushion needle position can not be changed.
 Note 3: Refer to page 1351, 1352 for accessory dimensions.

Symbol	Head end trunnion type (TB) basic dimensions																			
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	BH	C	D	DA	EE	FE	FF	FG	G	J	K	KA
φ 40	22	22	57	46	9	61	51	31	31	20	18	M8	Rc1/4	121	Rc1/8	M10	26	31	57	66
φ 50	28	27	68	50.5	12	72	56	36	38	26	20	M8	Rc3/8	138.5	Rc1/8	M10	28	38	68	77
φ 63	28	27	80	54	13	86	70	43	38	26	22	M8	Rc3/8	154	Rc1/4	M12	30	38	80	89
φ 80	36	32	98	66	13	106	80	53	43	34	26	M12	Rc1/2	179.5	Rc1/4	M14	34	43	98	107
φ 100	45	41	118	74	17.5	132	101	66	51	43	28	M12	Rc1/2	220.5	Rc3/8	M16	36	51	118	127


Symbol	Installation dimensions														With switch							
Bore size (mm)	KB	KK	L	LL	MM	N	Q	T	V	WF	X	Y	TC	TD	TE	TJ	TK	TM	TN	T0, T5, T2, T3	O	RD
φ 40	50.5	M14 x 1.5	38 to 39.5	188	16	2	13	8	15	30	242	M10 depth 9	57	16	30	176.5	43.5	63	95	33	11	
φ 50	55	M18 x 1.5	41.0 to 43.5	211.5	20	2.5	14	11	16	34	276	M10 depth 9	67	18	30	202	46	80	116	36.5	13	
φ 63	58.5	M18 x 1.5	47.5 to 50.0	229	20	3	15	11	16	30	290	M12 depth 10	82	20	35	211	51	90	130	42.5	13	
φ 80	70.5	M22 x 1.5	56 to 59	261.5	25	3.5	17	13	17.5	43.5	344.5	M14 depth 11	100	25	40	250.5	58	115	165	52.5	14.5	
φ 100	78.5	M26 x 1.5	66 to 69	312.5	30	4	18	16	26	48	409.5	M16 depth 13	121	35	50	299	65.5	135	205	60.5	18.5	

Symbol	With bellows									ℓ												
Bore size (mm)	T1, T2Y, T3Y T2YFM, T3YFM		T8		T2YD		H0*		A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
	O	RD	O	RD	O	RD	O	RD														
φ 40	33	10	33	5	33	10	33	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length(3.0) + 8
φ 50	36.5	12	36.5	7	36.5	12	36.5	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5
φ 63	42.5	12	42.5	7	42	12	42	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length(3.6) + 7.5
φ 80	52.5	13.5	52.5	8.5	52	13.5	52	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length(4.3) + 2.5
φ 100	60.5	17.5	60.5	12.5	60	17.5	60	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length(4.5) + 9

Note: ℓ dimensions below decimal point are rounded up.

Dimensions (φ40 to φ100)

● Center trunnion type (TC)

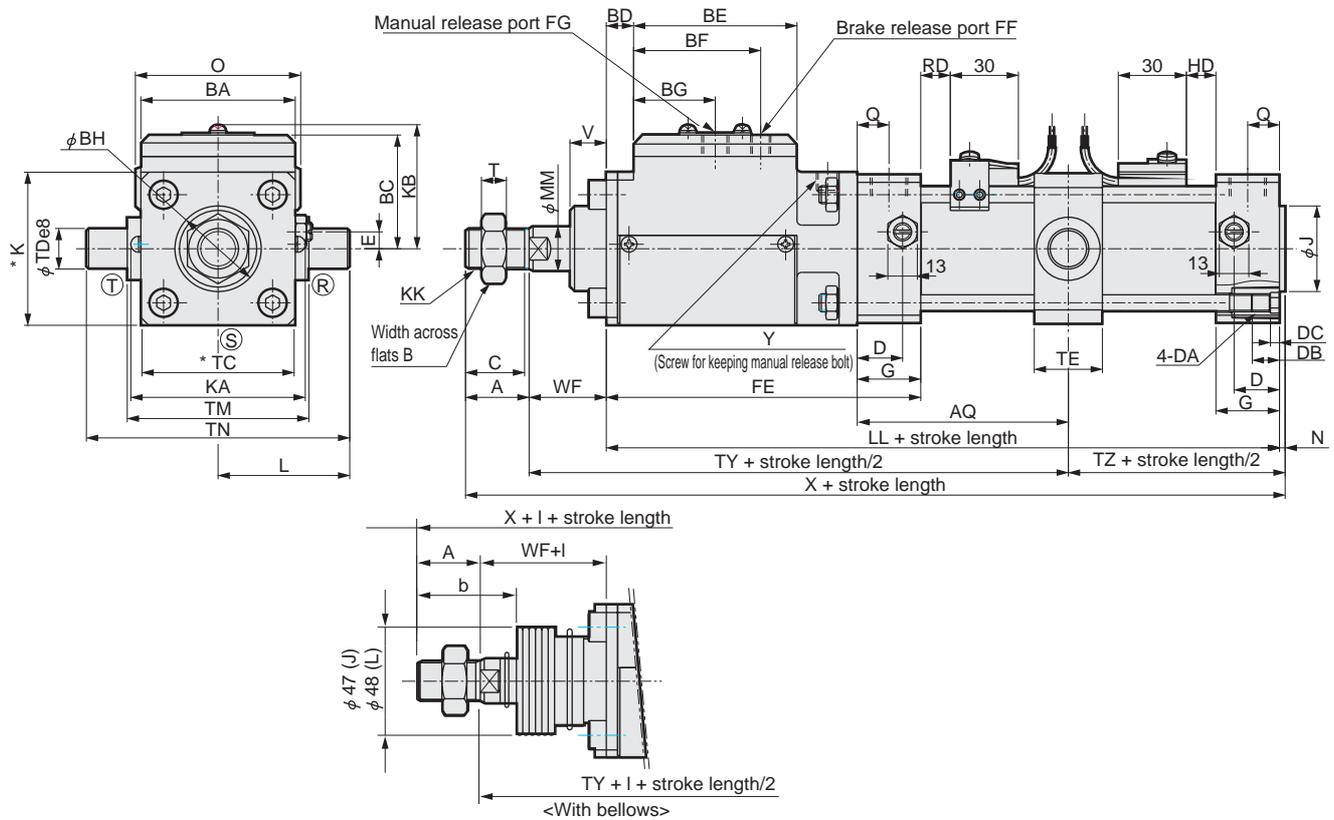

Note 1: (R)(S)(T) indicates a cushion needle position.
 Note 2: Refer to page 1351, 1352 for accessory dimensions.

Symbol		Center trunnion type (TC) basic dimensions																							
Bore size (mm)		A	B	BA	BC	BD	BE	BF	BG	BH	C	D	DA	DB	DC	E	EE	FE	FF	FG	G	J	K	KA	KB
φ 40		22	22	57	46	9	61	51	31	31	20	18	M8	12	4	7.5	Rc1/4	121	Rc1/8	M10	26	31	57	66	50.5
φ 50		28	27	68	50.5	12	72	56	36	38	26	20	M8	12	4	0	Rc3/8	138.5	Rc1/8	M10	28	38	68	77	55
φ 63		28	27	80	54	13	86	70	43	38	26	22	M8	12	4	0	Rc3/8	154	Rc1/4	M12	30	38	80	89	58.5
φ 80		36	32	98	66	13	106	80	53	43	34	26	M12	16	5	0	Rc1/2	179.5	Rc1/4	M14	34	43	98	107	70.5
φ 100		45	41	118	74	17.5	132	101	66	51	43	28	M12	16	5	0	Rc1/2	220.5	Rc3/8	M16	36	51	118	127	78.5

Symbol		Installation dimensions										With switch														
Bore size (mm)		KK	L	LL	MM	N	Q	T	V	WF	X	Y	AQ	TC	TD	TE	TM	TN	TY	TZ	T0, T5, T2, T3			T1, T2Y, T3Y, T2YFM, T3YFM		
																					O	RD	HD	O	RD	HD
φ 40		M14 x 1.5	38 to 39.5	188	16	2	13	8	15	30	242	M10 depth 9	46.5+ $\frac{\text{Stroke length}}{2}$	57	16	30	63	95	171.5	48.5	66	11	11	66	10	10
φ 50		M18 x 1.5	41.0 to 43.5	211.5	20	2.5	14	11	16	34	276	M10 depth 9	50.5+ $\frac{\text{Stroke length}}{2}$	67	18	30	80	116	195	53	73	13	13	73	12	12
φ 63		M18 x 1.5	47.5 to 50.0	229	20	3	15	11	16	30	290	M12 depth 10	52.5+ $\frac{\text{Stroke length}}{2}$	82	20	35	90	130	206.5	55.5	85	13	13	85	12	12
φ 80		M22 x 1.5	56 to 59	261.5	25	3.5	17	13	17.5	43.5	344.5	M14 depth 11	58+ $\frac{\text{Stroke length}}{2}$	100	25	40	115	165	247	61.5	105	14.5	14.5	105	13.5	13.5
φ 100		M26 x 1.5	66 to 69	312.5	30	4	18	16	26	48	409.5	M16 depth 13	64+ $\frac{\text{Stroke length}}{2}$	121	35	50	135	205	296.5	68	121	18.5	18.5	121	17.5	17.5

Symbol		With bellows										ℓ												
Bore size (mm)		T8			T2YD			H0*			A	WF	FF	b	d	d*	50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
		O	RD	HD	O	RD	HD	O	RD	HD														
φ 40		66	5	5	66	10	10	66	4	4	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length/3.0) + 8
φ 50		73	7	7	73	12	12	73	6	6	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length/3.6) + 7.5
φ 63		85	7	7	84	12	12	84	6	6	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length/3.6) + 7.5
φ 80		105	8.5	8.5	104	13.5	13.5	104	7.5	7.5	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length/4.3) + 2.5
φ 100		121	12.5	12.5	120	17.5	17.5	120	11.5	11.5	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length/4.5) + 9

Note: ℓ dimensions below decimal point are rounded up.


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake



Dimensions (φ 125 to φ 180)

● Axial foot type (LB)

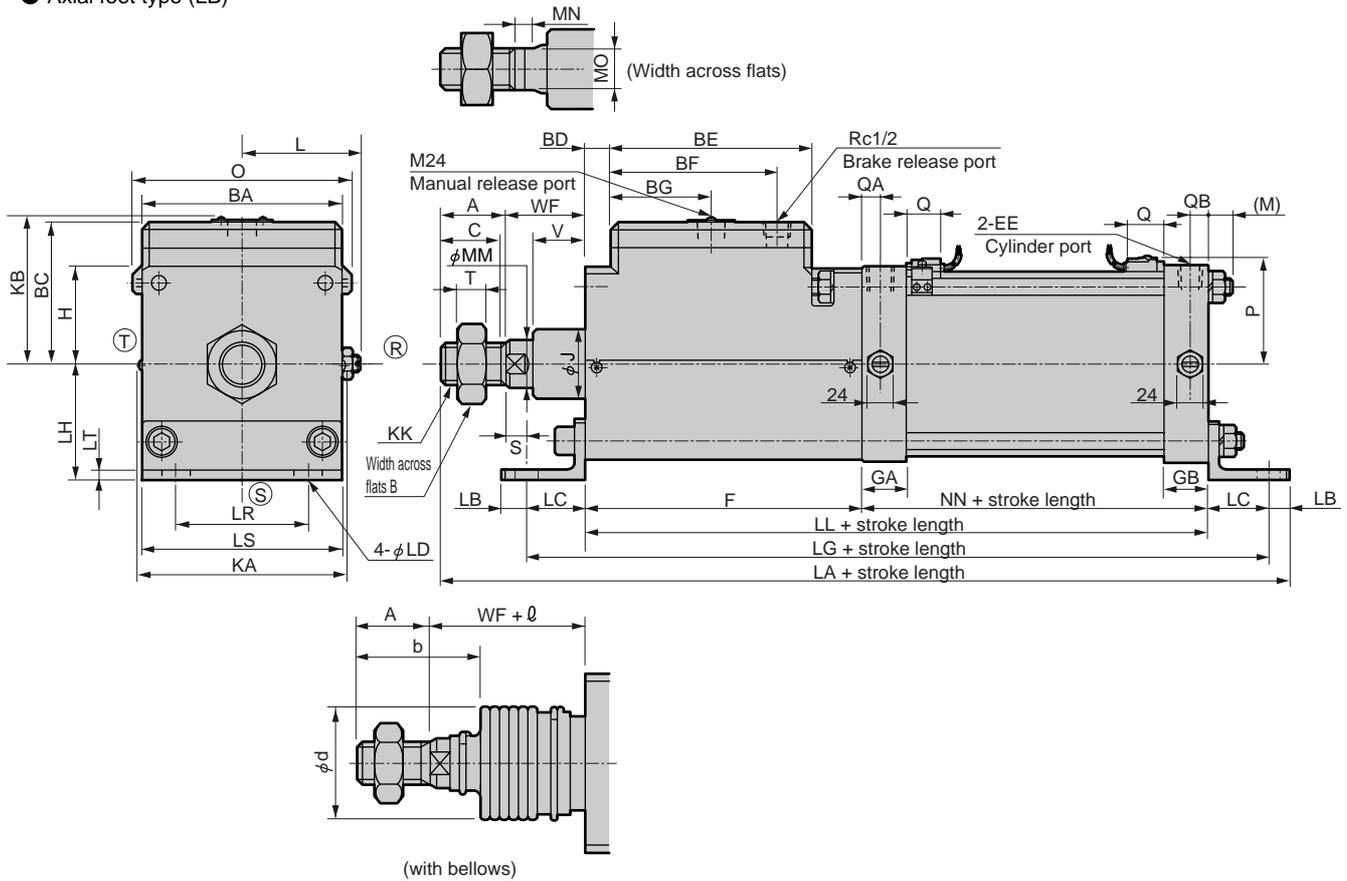

Note 1: (R)(S)(T) indicates a cushion needle position.
 Note 2: Refer to page 1353 for accessory dimensions.

Symbol	Axial foot type (LB) basic dimensions																				
	A	B	BA	BC	BD	BE	BF	BG	C	EE	F	GA	GB	H	J	KA	KB	KK	L	LL	M
φ 125	50	46	140	109	19.5	140	118	70	47	Rc1/2	200	31.5	29	70	55	150	115	M30 x 1.5	83 to 91	291	20
φ 140	50	46	157	116.5	18.5	157	128.5	78.5	47	Rc3/4	216	35.5	36	78.5	55	167	122.5	M30 x 1.5	91.5 to 99.5	318	20
φ 160	56	55	177	128	23	177	146.5	88.5	53	Rc3/4	245	38	36	88.5	62.5	190	134	M36 x 1.5	101.5 to 109.5	350	23
φ 180	63	60	200	146	14	200	170	100	60	Rc3/4	264	39	38.5	100	68.5	213	152	M40 x 1.5	113 to 121	373	26


Symbol	Installation dimensions																		
	MM	MN	MO	NN	QA	QB	S	T	V	WF	LA	LB	LC	LD	LG	LH	LR	LS	LT
φ 125	35	14	30	91	14	15	10	18	35	55	461	20	45	19	381	85	100	140	7
φ 140	35	14	30	102	16	17	7	18	35	57	495	20	50	19	418	100	112	157	8
φ 160	40	16	36	105	16	17	18.5	21	48	71.5	550.5	20	53	19	456	106	118	177	10
φ 180	45	18	41	109	16	17	18.5	24	53	78.5	601.5	27	60	24	493	125	132	200	10

Symbol	With switch									With bellows								
	O	P			Q			With bellows			With bellows							
		Grommet	Terminal box		Grommet	Terminal box		A	WF	b	d	ℓ						
φ 125	142	78.5	R*B	R*A	T2YDP*	32	44.5	30	50	55	74	75	(Stroke length/4.55) + 11					
φ 140	156	85	107.5	103	86.5	32	44.5	30	50	57	74	75	(Stroke length/4.55) + 9					
φ 160	176	93.5	122	117.5	95	32	44.5	30	56	71.5	82	80	(Stroke length/5.15) + 9					
φ 180	196	109.5	130	125.5	103	32	44.5	30	63	78.5	91	90	(Stroke length/5.15) + 9					

Dimensions (φ 125 to φ 180)



● Rod end flange type (FA)

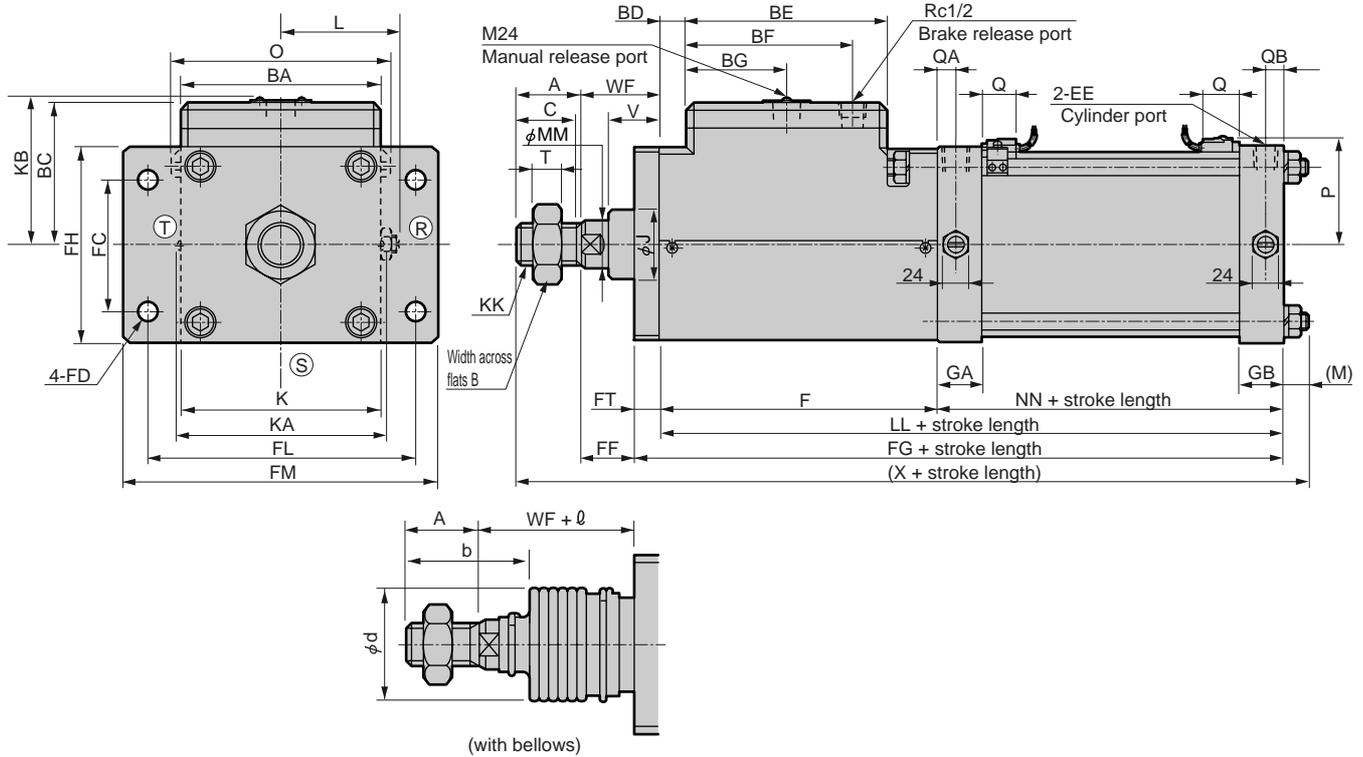

Note 1: (R)(S)(T) indicates a cushion needle position.
 Note 2: Refer to page 1353 for accessory dimensions.

Symbol	Rod end flange type (FA) basic dimensions																				
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	C	EE	F	GA	GB	J	K	KA	KB	KK	L	LL	M
φ 125	50	46	140	109	19.5	140	118	70	47	Rc1/2	200	31.5	29	55	140	150	115	M30 x 1.5	83 to 91	291	20
φ 140	50	46	157	116.5	18.5	157	128.5	78.5	47	Rc3/4	216	35.5	36	55	157	167	122.5	M30 x 1.5	91.5 to 99.5	318	20
φ 160	56	55	177	128	23	177	146.5	88.5	53	Rc3/4	245	38	36	62.5	177	190	134	M36 x 1.5	101.5 to 109.5	350	23
φ 180	63	60	200	146	14	200	170	100	60	Rc3/4	264	39	38.5	68.5	200	213	152	M40 x 1.5	113 to 121	373	26

Symbol	Installation dimensions																With switch							
																	P			Q				
																	O	Terminal box		T2YDP*	Grommet	Terminal box		T2YDP*
Bore size (mm)	MM	NN	QA	QB	T	V	WF	X	FC	FD	FF	FG	FH	FL	FM	FT		Grommet	R*B	R*A		Grommet	Terminal box	T2YDP*
φ 125	35	91	14	15	18	35	55	416	100	19	35	311	140	190	230	20	142	78.5	107.5	103	80	32	44.5	30
φ 140	35	102	16	17	18	35	57	445	112	19	37	338	157	212	250	20	156	85	114	109.5	86.5	32	44.5	30
φ 160	40	105	16	17	21	48	71.5	500.5	118	19	49.5	372	177	236	280	22	176	93.5	122	117.5	95	32	44.5	30
φ 180	45	109	16	17	24	53	78.5	540.5	132	24	53.5	398	200	265	310	25	196	109.5	130	125.5	103	32	44.5	30

Symbol	With bellows				
Bore size (mm)	A	WF	b	d	ℓ
φ 125	50	55	74	75	(Stroke length/4.55) + 11
φ 140	50	57	74	75	(Stroke length/4.55) + 9
φ 160	56	71.5	82	80	(Stroke length/5.15) + 9
φ 180	63	78.5	91	90	(Stroke length/5.15) + 9


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

Dimensions (φ 125 to φ 180)



● Eye bracket type (CA)

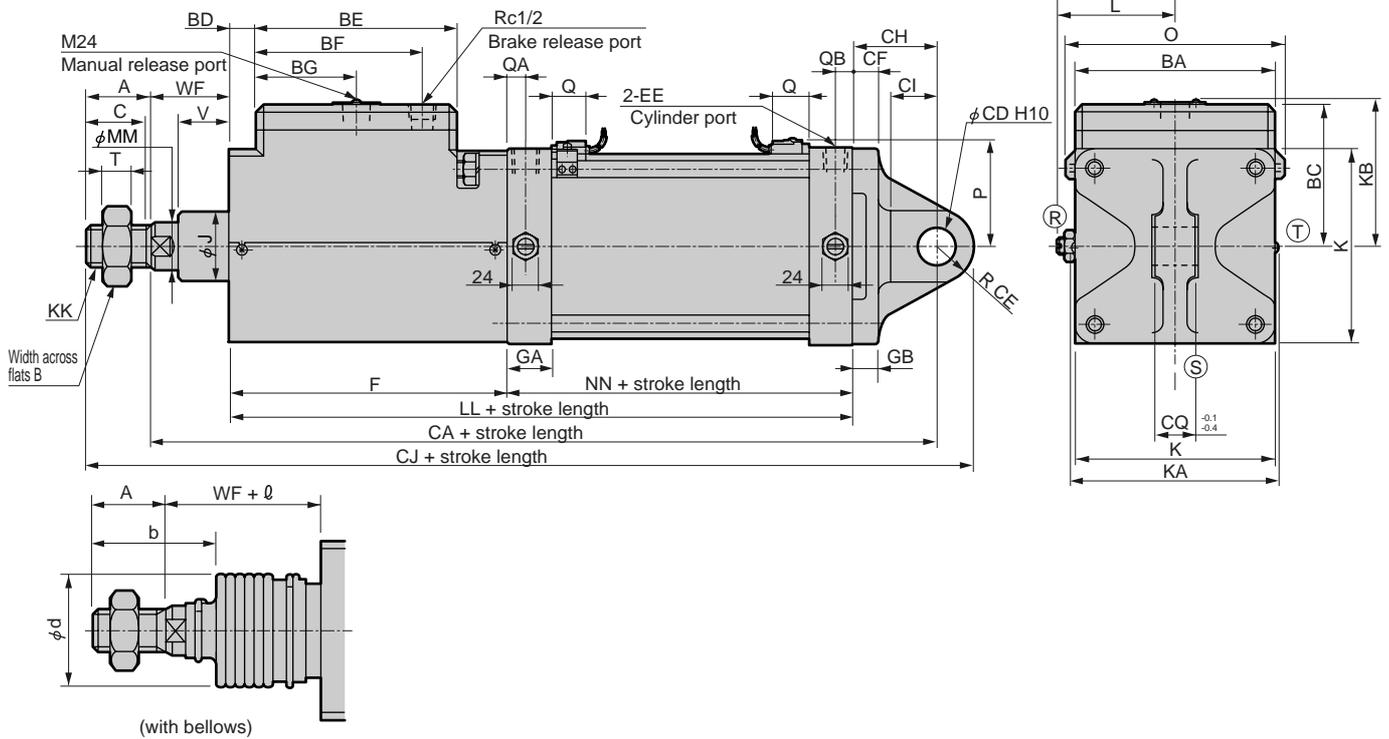

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Note 1: (R)(S)(T) indicates a cushion needle position.
 Note 2: Refer to page 1353 for accessory dimensions.

Symbol	Eye bracket type (CA) basic dimensions																				
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	C	EE	F	GA	GB	J	K	KA	KB	KK	L	LL	MM
φ 125	50	46	140	109	19.5	140	118	70	47	Rc1/2	200	31.5	29	55	140	150	115	M30 x 1.5	83 to 91	291	35
φ 140	50	46	157	116.5	18.5	157	128.5	78.5	47	Rc3/4	216	35.5	36	55	157	167	122.5	M30 x 1.5	91.5 to 99.5	318	35
φ 160	56	55	177	128	23	177	146.5	88.5	53	Rc3/4	245	38	36	62.5	177	190	134	M36 x 1.5	101.5 to 109.5	350	40
φ 180	63	60	200	146	14	200	170	100	60	Rc3/4	264	39	38.5	68.5	200	213	152	M40 x 1.5	113 to 121	373	45

Symbol	Installation dimensions												With switch									
	NN	QA	QB	T	V	WF	CA	CD	CE	CF	CH	CI	CJ	CQ	O	P			Q			
Bore size (mm)																						
															Grommet	Terminal box		Grommet	Terminal box	T2YDP*		
															R*B	R*A						
φ 125	91	14	15	18	35	55	409	25	25	20	63	35	483.5	32	142	78.5	107.5	103	80	32	44.5	30
φ 140	102	16	17	18	35	57	450	28	28	22	75	40	527.5	36	156	85	114	109.5	86.5	32	44.5	30
φ 160	105	16	17	21	48	71.5	496.5	32	32	24	75	40	584	40	176	93.5	122	117.5	95	32	44.5	30
φ 180	109	16	17	24	53	78.5	541.5	40	40	25	90	55	644	50	196	109.5	130	125.5	103	32	44.5	30


Symbol	With bellows				
Bore size (mm)	A	WF	b	d	ℓ
φ 125	50	55	74	75	(Stroke length/4.55) + 11
φ 140	50	57	74	75	(Stroke length/4.55) + 9
φ 160	56	71.5	82	80	(Stroke length/5.15) + 9
φ 180	63	78.5	91	90	(Stroke length/5.15) + 9

Brake cylinder (medium and large bore size)
With brake

Dimensions (φ 125 to φ 180)



- Center trunnion type (TC)

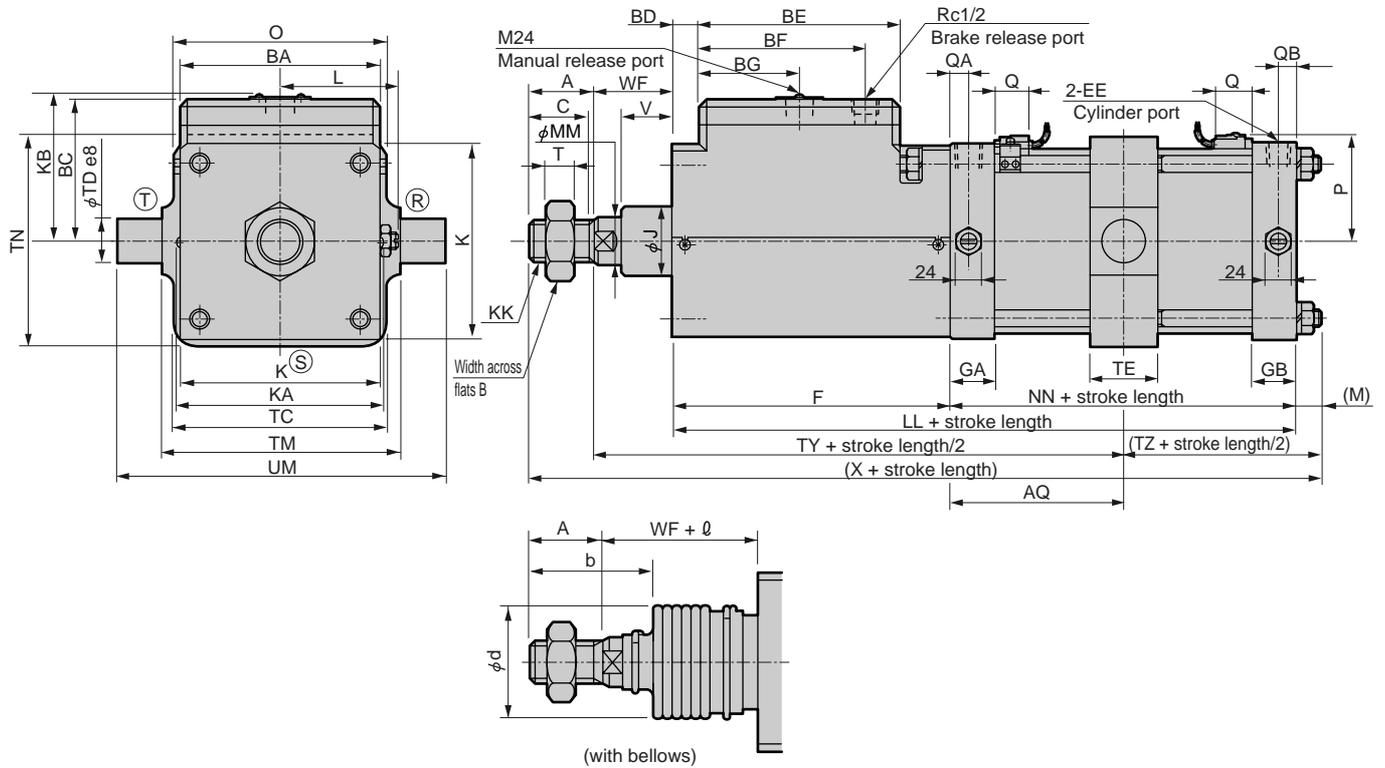

Note 1: (R)(S)(T) indicates a cushion needle position.
 Note 2: Refer to page 1353 for accessory dimensions.

Symbol	Center trunnion type (TC) basic dimensions																				
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	C	EE	F	GA	GB	J	K	KA	KB	KK	L	LL	M
φ 125	50	46	140	109	19.5	140	118	70	47	Rc1/2	200	31.5	29	55	140	150	115	M30 x 1.5	83 to 91	291	20
φ 140	50	46	157	116.5	18.5	157	128.5	78.5	47	Rc3/4	216	35.5	36	55	157	167	122.5	M30 x 1.5	91.5 to 99.5	318	20
φ 160	56	55	177	128	23	177	146.5	88.5	53	Rc3/4	245	38	36	62.5	177	190	134	M36 x 1.5	101.5 to 109.5	350	23
φ 180	63	60	200	146	14	200	170	100	60	Rc3/4	264	39	38.5	68.5	200	213	152	M40 x 1.5	113 to 121	373	26

Symbol	Installation dimensions																		
Bore size (mm)	MM	NN	QA	QB	T	V	WF	X	AQ	TC	TN	TD	TE	TM	UM	TY	TZ		
φ 125	35	91	14	15	18	35	55	416	45.5+ Stroke length z	150	150	32	50	170	234	300	66		
φ 140	35	102	16	17	18	35	57	445	51+ Stroke length z	154	170	36	55	190	262	323.5	71.5		
φ 160	40	105	16	17	21	48	71.5	500.5	52.5+ Stroke length z	190	190	40	60	212	292	368.5	76		
φ 180	45	109	16	17	24	53	78.5	540.5	54.5+ Stroke length z	210	210	45	65	236	326	396.5	81		

Symbol	With switch					With bellows							
	O	Grommet	Terminal box		T2YDP*	Grommet	Terminal box	T2YDP*	A	WF	b	d	ℓ
Bore size (mm)			R*B	R*A									
φ 125	142	78.5	107.5	103	80	32	44.5	30	50	55	74	75	(Stroke length/4.55) + 11
φ 140	156	85	114	109.5	86.5	32	44.5	30	50	57	74	75	(Stroke length/4.55) + 9
φ 160	176	93.5	122	117.5	95	32	44.5	30	56	71.5	82	80	(Stroke length/5.15) + 9
φ 180	196	109.5	130	125.5	103	32	44.5	30	63	78.5	91	90	(Stroke length/5.15) + 9

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending


Brake cylinder (medium and large bore size)
With brake

JSC3-N Series

Dimensions (φ 125 to φ 180)



● Rod end trunnion type (TA)

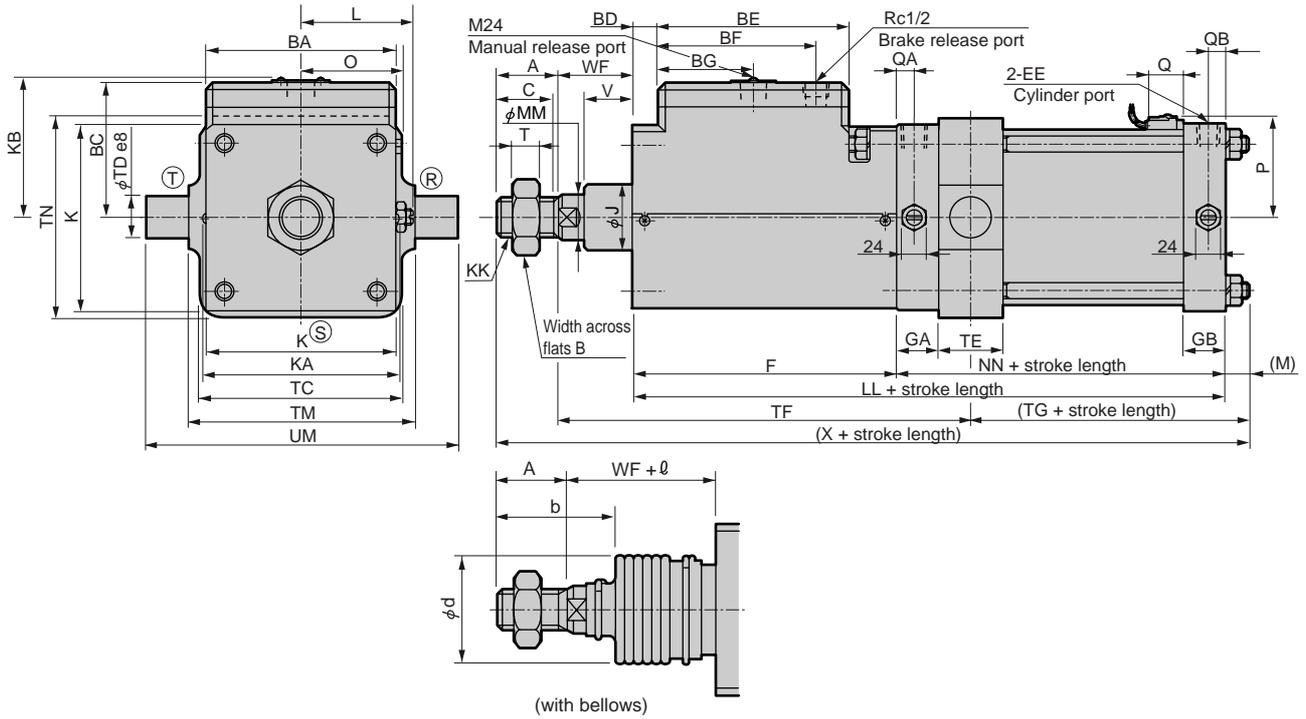

Note 1: A position can not be detected at rod side stroke end.
 Note 2: (R)(S)(T) indicates a cushion needle position.
 Note 3: Refer to page 1353 for the dimensions of the accessory.

Symbol	Rod end trunnion type (TA) basic dimensions																					
Bore size (mm)	A	B	BA	BC	BD	BE	BF	BG	C	EE	F	GA	GB	J	K	KA	KB	KK	L	LL	M	MM
φ 125	50	46	140	109	19.5	140	118	70	47	Rc1/2	200	31.5	29	55	140	150	115	M30 x 1.5	83 to 91	291	20	35
φ 140	50	46	157	116.5	18.5	157	128.5	78.5	47	Rc3/4	216	35.5	36	55	157	167	122.5	M30 x 1.5	91.5 to 99.5	318	20	35
φ 160	56	55	177	128	23	177	146.5	88.5	53	Rc3/4	245	38	36	62.5	177	190	134	M36 x 1.5	101.5 to 109.5	350	23	40
φ 180	63	60	200	146	14	200	170	100	60	Rc3/4	264	39	38.5	68.5	200	213	152	M40 x 1.5	113 to 121	373	26	45


Symbol	Installation dimensions																With switch							
																	P			Q				
Bore size (mm)	NN	O	QA	QB	T	V	WF	X	TC	TD	TE	TF	TG	TM	TN	UM	Grommet	Terminal box		T2YDP*	Grommet	Terminal box		T2YDP*
																		R*B	R*A					
φ 125	91	71	14	15	18	35	55	416	150	32	50	315	51	170	150	234	78.5	107.5	103	80	32	44.5	30	
φ 140	102	78	16	17	18	35	57	445	154	36	55	339.5	55.5	190	170	262	85	114	109.5	86.5	32	44.5	30	
φ 160	105	88	16	17	21	48	71.5	500.5	190	40	60	385.5	59	212	190	292	93.5	122	117.5	95	32	44.5	30	
φ 180	109	98	16	17	24	53	78.5	540.5	210	45	65	414	63.5	236	210	326	109.5	130	125.5	103	32	44.5	30	

Symbol	With bellows				
Bore size (mm)	A	WF	b	d	∅
φ 125	50	55	74	75	(Stroke length/4.55) + 11
φ 140	50	57	74	75	(Stroke length/4.55) + 9
φ 160	56	71.5	82	80	(Stroke length/5.15) + 9
φ 180	63	78.5	91	90	(Stroke length/5.15) + 9

Dimensions (φ 125 to φ 180)



- Head end trunnion type (TB)

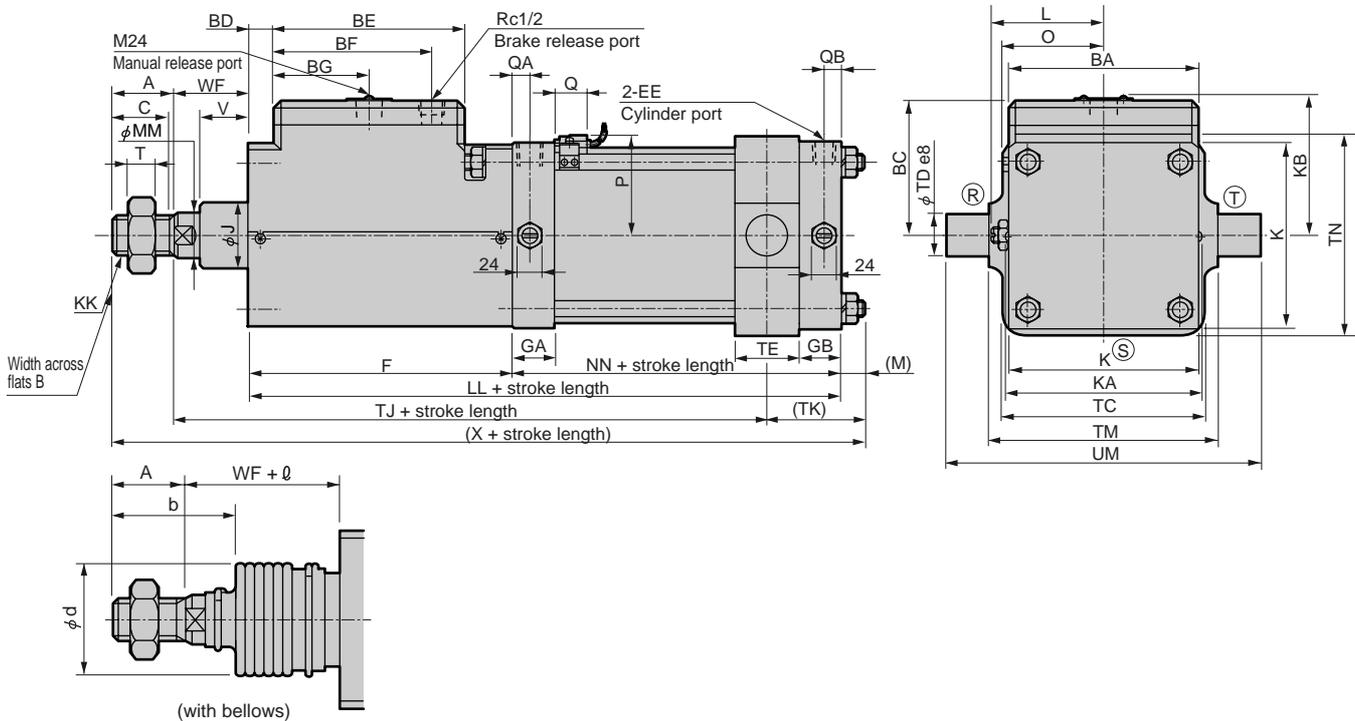

Note 1: A position can not be detected at head side stroke end.
 Note 2: (R)(S)(T) indicates a cushion needle position.
 Note 3: Refer to page 1353 for the dimensions of the accessory.

Head end trunnion type (TB) basic dimensions																						
Symbol	A	B	BA	BC	BD	BE	BF	BG	C	EE	F	GA	GB	J	K	KA	KB	KK	L	LL	M	MM
φ 125	50	46	140	109	19.5	140	118	70	47	Rc1/2	200	31.5	29	55	140	150	115	M30 x 1.5	83 to 91	291	20	35
φ 140	50	46	157	116.5	18.5	157	128.5	78.5	47	Rc3/4	216	35.5	36	55	157	167	122.5	M30 x 1.5	91.5 to 99.5	318	20	35
φ 160	56	55	177	128	23	177	146.5	88.5	53	Rc3/4	245	38	36	62.5	177	190	134	M36 x 1.5	101.5 to 109.5	350	23	40
φ 180	63	60	200	146	14	200	170	100	60	Rc3/4	264	39	38.5	68.5	200	213	152	M40 x 1.5	113 to 121	373	26	45

Symbol	Installation dimensions																With switch						
																	P			Q			
	NN	O	QA	QB	T	V	WF	X	TC	TD	TE	TJ	TK	TM	TN	UM	Grommet	Terminal box		T2YDP*	Grommet	Terminal box	
φ 125	91	71	14	15	18	35	55	416	150	32	50	285	81	170	150	234	78.5	107.5	103	80	32	44.5	30
φ 140	102	78	16	17	18	35	57	445	154	36	55	307.5	87.5	190	170	262	85	114	109.5	86.5	32	44.5	30
φ 160	105	88	16	17	21	48	71.5	500.5	190	40	60	351.5	93	212	190	292	93.5	122	117.5	95	32	44.5	30
φ 180	109	98	16	17	24	53	78.5	540.5	210	45	65	379	98.5	236	210	326	109.5	130	125.5	103	32	44.5	30


With bellows					
Symbol	A	WF	b	d	ℓ
φ 125	50	55	74	75	(Stroke length/4.55) + 11
φ 140	50	57	74	75	(Stroke length/4.55) + 9
φ 160	56	71.5	82	80	(Stroke length/5.15) + 9
φ 180	63	78.5	91	90	(Stroke length/5.15) + 9

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

Discontinue

Brake cylinder Double acting with valve for brake

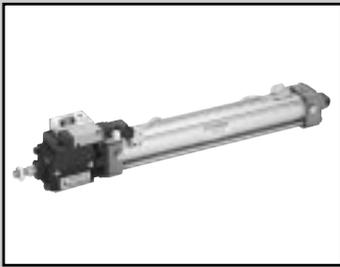

JSC3-V Series

● Bore size: ϕ 40, ϕ 50, ϕ 63, ϕ 80, ϕ 100



Specifications

Descriptions		JSC3-V (with switch)					JSC3-SV (with switch)				
Bore size	mm	ϕ 40	ϕ 50	ϕ 63	ϕ 80	ϕ 100	ϕ 40	ϕ 50	ϕ 63	ϕ 80	ϕ 100
Actuation		Double acting with valve for brake					Double acting low pressure release type with valve for brake				
Working fluid		Compressed air									
Max. working pressure	MPa	0.7									
Min. working pressure	MPa	0.3					0.25				
	Brake section										
pressure	MPa	0.1									
	Cylinder section										
Withstanding pressure	MPa	1.6									
Ambient temperature	°C	-5 to 50 (no freezing)									
Port size	Brake section	Rc1/8		Rc1/4		Rc3/8	Rc1/8		Rc1/4	Rc3/8	
	Cylinder section	Rc1/4	Rc3/8		Rc1/2		Rc1/4	Rc3/8		Rc1/2	
Stroke tolerance	mm	+0.9 0 (to 360),					+1.4 0 (to 1000)				
Working piston speed	mm/s	50 to 1000 (used within allowable energy absorption)									
Cushion		Air cushion									
Effective cushion length	mm	14.6	16.6	16.6	20.6	23.6	14.6	16.6	16.6	20.6	23.6
Lubrication		Not required					Not required (when lubricating, use turbine oil Class 1 ISOVG32)				
Stoppage accuracy	mm	\pm 1.0 (300mm/s loadless)									
Holding force	N	980	1569	2451	3922	6178	784	1255	1961	3138	4941
	Cushioned	4.29	8.37	15.8	27.9	49.8	4.29	8.37	15.8	27.9	49.8
		No cushion	0.067	0.079	0.079	0.201	0.301	0.067	0.079	0.079	0.201
Allowable energy absorption	J	Note: If "No cushion" is selected, the large energy generated by the external load cannot be absorbed. We recommend to use an external shock absorber together.									

Note: Specifications of valves are the same as the standard products " 4KB2 ". Refer to " Pneumatic Valves (CB-23SA)" for details.

Stroke length

Bore size (mm)	Standard stroke length (mm)	Max. stroke length (mm)	Available stroke length (mm)	Min. stroke length (mm)
ϕ 40	50, 75, 100, 150, 200, 250, 300, 350, 400, 450, 500	600	1000	1
ϕ 50			2000	
ϕ 63			2500	
ϕ 80		700		
ϕ 100		800		

* Min. stroke length will differ depending on the installation method. Refer to the table below.

Custom stroke length is available per 1mm increment.

Min. stroke length of type with switch (T type switch)

● T0/T5 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation A position can not be detected at rod side stroke end.	Head end trunnion installation A position can not be detected at rod side stroke end.
	1	2	3	4	1	2	3	4	1	2	3	4	1	1
Bore size														
ϕ 40	20 (10)	20 (20)	40 (40)	60 (60)	20 (10)	60 (45)	105 (75)	150 (105)	110 (110)	110 (110)	175 (145)	175 (145)	50 (50)	50 (50)
ϕ 50	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	20 (20)	65 (50)	65 (60)	135 (135)	135 (135)	135 (135)	135 (135)	60 (60)	60 (60)
ϕ 63	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	20 (20)	70 (55)	70 (60)	110 (95)	110 (95)	110 (100)	110 (100)	50 (45)	50 (45)
ϕ 80	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	115 (85)	115 (85)	115 (105)	115 (105)	55 (40)	55 (40)
ϕ 100	15 (15)	25 (25)	45 (45)	70 (70)	15 (15)	25 (25)	70 (55)	70 (70)	125 (95)	125 (95)	125 (115)	125 (115)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

Min. stroke length of type with switch (T type switch)

● T8 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation A position can not be detected at rod side stroke end.	Head end trunnion installation A position can not be detected at rod side stroke end.
	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ 40	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	50 (35)	95 (65)	140 (95)	95 (85)	95 (85)	155 (125)	155 (125)	45 (40)	45 (40)
φ 50	10 (10)	20 (20)	40 (40)	60 (60)	10 (10)	20 (20)	70 (55)	70 (60)	115 (115)	115 (115)	135 (135)	135 (135)	50 (50)	50 (50)
φ 63	10 (10)	20 (20)	40 (40)	60 (60)	10 (10)	20 (20)	70 (55)	70 (60)	95 (75)	95 (75)	110 (110)	110 (110)	45 (35)	45 (35)
φ 80	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	100 (70)	100 (70)	115 (115)	115 (115)	50 (35)	50 (35)
φ 100	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	110 (80)	110 (80)	125 (125)	125 (125)	55 (40)	55 (40)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

● T2/T3 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation A position can not be detected at rod side stroke end.	Head end trunnion installation A position can not be detected at rod side stroke end.
	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ 40	20 (10)	20 (15)	25 (25)	40 (40)	20 (10)	60 (45)	105 (75)	150 (105)	105 (75)	105 (75)	165 (135)	165 (135)	50 (35)	50 (35)
φ 50	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	105 (75)	105 (75)	105 (75)	105 (75)	45 (30)	45 (30)
φ 63	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	110 (80)	110 (80)	110 (85)	110 (85)	50 (35)	50 (35)
φ 80	15 (10)	15 (15)	30 (30)	45 (45)	15 (10)	15 (15)	60 (45)	60 (45)	115 (85)	115 (85)	115 (90)	115 (90)	55 (40)	55 (40)
φ 100	10 (10)	15 (15)	30 (30)	45 (45)	10 (10)	15 (15)	60 (45)	60 (45)	125 (95)	125 (95)	125 (100)	125 (100)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

● T1/T2Y/T3Y/T2YD type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation A position can not be detected at rod side stroke end.	Head end trunnion installation A position can not be detected at rod side stroke end.
	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ 40	20 (10)	20 (15)	25 (25)	40 (40)	20 (10)	60 (45)	105 (75)	150 (105)	105 (75)	105 (75)	165 (135)	165 (135)	50 (35)	50 (35)
φ 50	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	100 (70)	100 (70)	100 (75)	100 (75)	45 (30)	45 (30)
φ 63	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	105 (75)	105 (75)	105 (85)	105 (85)	50 (35)	50 (35)
φ 80	15 (10)	15 (15)	30 (30)	45 (45)	15 (10)	15 (15)	60 (45)	60 (45)	110 (80)	110 (80)	110 (90)	110 (90)	55 (40)	55 (40)
φ 100	10 (10)	15 (15)	30 (30)	45 (45)	10 (10)	15 (15)	60 (45)	60 (45)	120 (90)	120 (90)	120 (100)	120 (100)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire). Note that radial lead wire (V) is not available for T2YD.

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

JSC3-V Series

Switch specifications (T type switch)

● 1 color/2 color indicator/strong magnetic field proof

*The T0/T5 switch can be used with 220 VAC . Consult CKD for working conditions.

Descriptions	Proximity 2 wire			Proximity 3 wire			Reed 2 wire					Proximity 2 wire			
	T1H/T1 V	T2H/T2V/ T2JH/T2JV	T2YH/T2YV	T3H/T3V	T3PH/T3PV (Custom order)	T3YH/T3YV	TOH/TOV	T5H/T5V		T8H/T8V		T2YD*/T2YDP*			
Applications	Programmable controller relay, small solenoid valve	Programmable controller		Programmable controller, relay			Programmable controller, relay	Programmable controller, relay, IC circuit (w/o indicator light), serial connection		Programmable controller, relay		Programmable controller			
Output method	-			NPN output	PNP output	NPN output	-								
Power voltage	-			10 to 28 VDC			-								
Load voltage	85 to 265 VAC	10 to 30 VDC		30 VDC or less			12/24 VDC	110 VAC	5/12/24 VDC	110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ± 10%	
Load current	5 to 100mA	5 to 20mA (Note 1)		100mA or less			50mA or less	5 to 50mA	7 to 20mA	50mA or less	20mA or less	5 to 50mA	7 to 20mA	7 to 10mA	5 to 20mA
Light	LED (ON lighting)	LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	Green LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	Without indicator light		LED (ON lighting)		Red/green LED (ON lighting)			
Leakage current	1mA or less with 100 VAC 2mA or less with 200 VAC	1mA or less		10 μA or less			0mA					1mA or less			

● With preventive maintenance output

Descriptions	Proximity 3 wire		Proximity 4 wire		Proximity 3 wire		Proximity 4 wire			
	T2YFH/V		T3YFH/V		T2YMH/V		T3YMH/V			
Applications	Programmable controller		Programmable controller, relay		Programmable controller		Programmable controller, relay			
Output method	NPN output									
Light	Installation position adjustment section				Red/green LED (ON lighting)					
	Preventive maintenance output				Yellow LED (ON lighting)					
Regular Output	Power voltage		-		10 to 28 VDC		-		10 to 28 VDC	
	Load voltage		10 to 30 VDC		30 VDC or less		10 to 30 VDC		30 VDC or less	
	Load current		5 to 20mA		50mA or less		5 to 20mA		50mA or less	
	Leakage current		1mA or less		10 μA or less		1.2mA or less		10 μA or less	
Preventive maintenance Output	Load voltage								30 VDC or less	
	Load current		20mA or less		50mA or less		5 to 20mA or less		50mA or less	
	Leakage current								10 μA or less	

Note 1: Refer to Ending 1 for other switches.

Note 2: Max. load current above: 20mA at 25°C . The current will be lower than 20mA if ambient temperature around switch is higher than 25°C .
(5 to 10mA when 60°C)

Switch specifications (H type switch)

● Reed switch

Descriptions	Reed 2 wire		
	H0		H0Y (2 color indicator type)
Applications	Relay, programmable controller		Programmable controller dedicated
Load voltage / current	12/24 VDC 5 to 50mA	110 VAC 7 to 20mA	24 VDC, 5 to 20mA (Note 2)
Light	Green LED ON lighting		Red/green LED ON lighting
Leakage current	10 μA or less		

Note 1: Refer to Ending 1 for other switch specifications.

Note 2: The maximum load current is applied at 25°C . The current will be lower than 20mA if ambient temperature around switch is higher than 25°C .
(5 to 10mA when 60°C)

Valve electric specifications for brake

Descriptions	4KB2		
Rated voltage (V)	100 VAC (50/60Hz)	200 VAC (50/60Hz)	24 VDC
Starting current (A)	0.056/0.044	0.028/0.022	0.075
Holding current (A)	0.028/0.022	0.014/0.011	0.075
Power consumption (W)	1.8/1.4		1.8
Insulation class	Class B (molded coil)		

Note 1: 100/200 VAC coil is available for 110/220 VAC (60Hz).

Note 2: Specifications of valves are the same as the standard products 4KB2. Refer to "Pneumatic Valves (No. CB-23SA)" for details.

Cylinder weight

(Unit: kg)

Descriptions, mounting style	Product weight when stroke length (S) = 0mm						Weight per switch (including mounting bracket)					Valve weight	
	Bore size (mm)	Basic type (00)	Foot type (LB)	Flange type (FA and FB)	Eye bracket type (CA)	Clevis bracket type (CB)	Trunnion type (TC)	T type	H type		T2YD type		Additional weight per S = 100mm
1m									3m	1m	3m		
φ40	2.48	2.66	2.91	2.83	2.83	2.86	0.018	0.10	0.20	0.08	0.17	0.39	0.32
φ50	3.47	3.67	3.97	3.87	3.87	3.97						0.46	
φ63	5.09	5.49	6.19	5.79	5.79	5.89						0.50	
φ80	8.15	8.85	9.95	9.65	9.65	9.45						0.90	
φ100	14.70	15.70	17.40	16.90	16.90	17.30						1.12	

(E.g.) Product weight of JSC3-V-LB-50B-200-T0H-D

Product weight when S = 0mm 3.67kg
 Additional weight when S = 200mm..... $0.46 \times \frac{200}{100} = 0.92$ (kg)
 Weight of two switches $0.018\text{kg} \times 2 = 0.036\text{kg}$
 Weight of valve 0.32kg
 Product weight $3.67\text{kg} + 0.92\text{kg} + 0.036\text{kg} + 0.32\text{kg} = 4.946\text{kg}$

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

JSC3-V Series

How to order


Without switch



With switch



Strong magnetic field proof (H0, H0Y switch) with switch

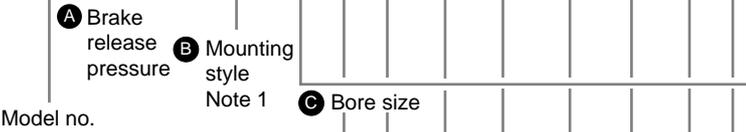

Model no.

Note on model no. selection

- Note 1: The mounting bracket is shipped with the product. (Special head end flange type is attached when shipped.)
- Note 2: Refer to Ending 74 if max. stroke length is exceeding.
- Note 3: Refer to page 1326 for min. stroke length with switch.
- Note 4: T2YD, T2YDT, H0 and H0Y is strong magnetic field proof switch.
- Note 5: When selecting TA or TB for mounting, the number of switches is limited to "H" (one on head side) for TA, and "R" (one on rod side) for TB.
- Note 6: Refer to each dimensions to confirm indication of "S", "T", and "G" positions.
- Note 7: "I" and "Y" can not be selected at the same time.
- Note 8: Refer to Ending 89 for custom specifications of rod end form.

<Example of model number>

JSC3-V-LB-40B-50-1-T0H-R-SI

Model: Brake cylinder double acting with valve for brake

- A** Brake release pressure : Standard type 0.3MPa
- B** Mounting style : Axial foot type
- C** Bore size : ϕ 40mm
- D** Port thread type : Rc thread
- E** Cushion : Both sides cushioned
- F** Stroke length : 50mm
- G** Valve voltage : 100 VAC
- H** Switch model no. : Proximity switch T0H, lead wire 1m
- I** Switch quantity : One on rod end
- J** Option : Cushion needle position S
- K** Accessory : Rod eye

Symbol	Descriptions		
A Brake release pressure			
Blank	Standard type 0.3MPa		
S	Low pressure release type 0.25MPa		
B Mounting style			
00	Basic type		
LB	Axial foot type		
FA	Rod end flange type		
FB	Head end flange type		
FC	Special head end flange type		
CA	Eye bracket type		
CB	Clevis bracket type (pin and snap ring attached)		
TC	Center trunnion type		
TA	Rod end trunnion type		
TB	Head end trunnion type		
C Bore size (mm)			
40	ϕ 40		
50	ϕ 50		
63	ϕ 63		
80	ϕ 80		
100	ϕ 100		
D Port thread type			
Blank	Rc thread		
N	NPT thread (custom order)		
G	G thread (custom order)		
E Cushion			
B	Both sides cushioned		
R	Rod end cushion		
H	Head end cushion		
N	No cushion		
F Stroke length (mm)			
Bore size	Stroke length Note 3	Available stroke length	Custom stroke length
ϕ 40	1 to 600	1000	1 mm increment
ϕ 50	1 to 600	2000	
ϕ 63	1 to 600	2500	
ϕ 80	1 to 700	2500	
ϕ 100	1 to 800	2500	
G Valve voltage			
1	100 VAC		
2	200 VAC		
3	24 VDC		
4	12 VDC		
H Switch model no.			
Refer to the following page for switch model no.			
*Lead wire length			
Blank	1m (standard)		
3	3m (option)		
5	5m (option)		
I Switch quantity			
R	One on rod end		
H	One on rod head		
D	Two		
T	Three		
4	Four (if more than four switches, indicate switch quantity.)		
J Option			
J	Bellows	100 °C	200 °C
L	Bellows	250 °C	400 °C
M	Piston rod material (stainless steel)		
Blank	Cushion needle position R (standard)		
S	Cushion needle position S		
T	Cushion needle position T		
G	With indicator		
K Accessory			
I	Rod eye		
Y	Rod clevis (pin and snap ring attached)		
B1	Eye bracket		
B2	Clevis bracket (pin and snap ring attached)		
B3	Eye bracket		
B4	Trunnion type No. 2 bracket		

How to order mounting bracket

Bore size (mm)	ϕ 40	ϕ 50	ϕ 63	ϕ 80	ϕ 100
Foot (LB)	JSC3-40-LB	JSC3-50-LB	JSC3-63-LB	JSC3-80-LB	JSC3-100-LB
Flange (FB)	JSC3-40-FB	JSC3-50-FB	JSC3-63-FB	JSC3-80-FB	JSC3-100-FB
Eye (CA)	S1-CA-40	S1-CA-50	S1-CA-63	S1-CA-80	S1-CA-100
Clevis (CB)	S1-CB-40	S1-CB-50	S1-CB-63	S1-CB-80	S1-CB-100

Note 1: The foot type bracket is a two-piece set.

[H] Switch model no.

T type switch				
Axial lead wire	Radial lead wire	Contact	Indicator	Lead wire
T0H*	T0V*	Reed	1 color indicator type	2-wire
T5H*	T5V*		Without indicator light	
T8H*	T8V*		1 color indicator type	
T1H*	T1V*	Proximity	1 color indicator type	2-wire
T2H*	T2V*			3-wire
T3H*	T3V*		2-wire	
T2YH*	T2YV*		2 color indicator type	3-wire
T3YH*	T3YV*			3-wire
T3PH*	T3PV*		1 color indicator type (custom order)	3-wire
T2YFH*	T2YFV*		2 color indicator type (w/o indicator light for preventive maintenance output)	3-wire
T3YFH*	T3YFV*			4-wire
T2YMH*	T2YMV*		2 color indicator type (with indicator light for preventive maintenance output (1 color))	3-wire
T3YMH*	T3YMV*			4-wire
T2YD*	-	Strong magnetic field proof switch		2-wire
T2YDT*	-			
T2JH*	T2JV*			Off-delay type

R switch/H type switch					
Grommet type	Terminal box type		Contact	Indicator	Lead wire
	Standard type	Water tight type			
R1*	R1B	R1A		1 color indicator type	2-wire
R2*					3-wire
R3*					4-wire
R4*					5-wire
R5*					6-wire
R6*					7-wire
R7*					8-wire
R8*					9-wire
R9*					10-wire
R10*					11-wire
R11*					12-wire
R12*					13-wire
R13*					14-wire
R14*					15-wire
R15*					16-wire
R16*					17-wire
R17*					18-wire
R18*					19-wire
R19*					20-wire
R20*					21-wire
R21*					22-wire
R22*					23-wire
R23*					24-wire
R24*					25-wire
R25*					26-wire
R26*					27-wire
R27*					28-wire
R28*					29-wire
R29*					30-wire
R30*					31-wire
R31*					32-wire
R32*					33-wire
R33*					34-wire
R34*					35-wire
R35*					36-wire
R36*					37-wire
R37*					38-wire
R38*					39-wire
R39*					40-wire
R40*					41-wire
R41*					42-wire
R42*					43-wire
R43*					44-wire
R44*					45-wire
R45*					46-wire
R46*					47-wire
R47*					48-wire
R48*					49-wire
R49*					50-wire
R50*					51-wire
R51*					52-wire
R52*					53-wire
R53*					54-wire
R54*					55-wire
R55*					56-wire
R56*					57-wire
R57*					58-wire
R58*					59-wire
R59*					60-wire
R60*					61-wire
R61*					62-wire
R62*					63-wire
R63*					64-wire
R64*					65-wire
R65*					66-wire
R66*					67-wire
R67*					68-wire
R68*					69-wire
R69*					70-wire
R70*					71-wire
R71*					72-wire
R72*					73-wire
R73*					74-wire
R74*					75-wire
R75*					76-wire
R76*					77-wire
R77*					78-wire
R78*					79-wire
R79*					80-wire
R80*					81-wire
R81*					82-wire
R82*					83-wire
R83*					84-wire
R84*					85-wire
R85*					86-wire
R86*					87-wire
R87*					88-wire
R88*					89-wire
R89*					90-wire
R90*					91-wire
R91*					92-wire
R92*					93-wire
R93*					94-wire
R94*					95-wire
R95*					96-wire
R96*					97-wire
R97*					98-wire
R98*					99-wire
R99*					100-wire

The switch has been changed to T type switch since October first, 2007.

How to order brake unit

JSC3 - 40 - BRAKE-UNIT

↓
Bore size (Item © previous page)

● For mounting bracket FA

JSC3 - FA - 40 - BRAKE-UNIT

↓
Bore size (Item © previous page)

How to order T type switch

● Switch body + mounting bracket

JSC3 - T0H - 40

↓ ↓
Switch model no. Bore size
(Item Ⓗ) (Item © previous page)

● Only switch body

SW - T0H

↓
Switch model no.
(Item Ⓗ)

● Mounting bracket

JSC3 - TS - 40

↓ ↓
Bracket Bore size
(Item © previous page)

How to order H type switch

● Switch body + mounting bracket

JSC3-L2 - H0* - 40

↓ ↓
Switch model no. Bore size
(Item Ⓗ) (Item © previous page)

● Only switch body

SW - H0*

↓
Switch model no. (item Ⓗ)

● Mounting bracket

JSC3-L2 - H - 40

↓
Bore size
(Item © previous page)

How to order Y2YD type switch.

● Switch body + mounting bracket

JSC3 - T2YD* - 40

↓ ↓
Switch model no. Bore size
(Item Ⓗ) (Item © previous page)

● Only switch body

SW - T2YD*

↓
Switch model no.
(Item Ⓗ)

● Mounting bracket

JSC3 - T - 40

↓
Bore size
(Item © previous page)



SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size) With brake

JSC3-V Series

Dimensions



With valve for brake
 ● JSC3-V-40 $\phi 40, \phi 50$
 -50

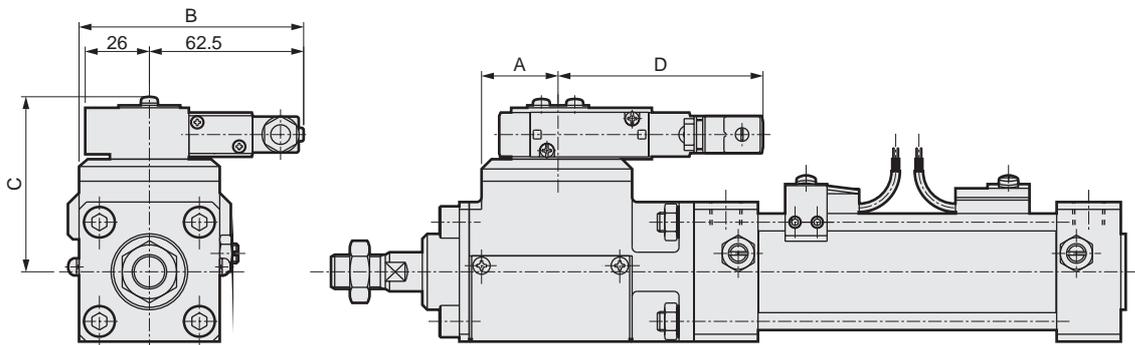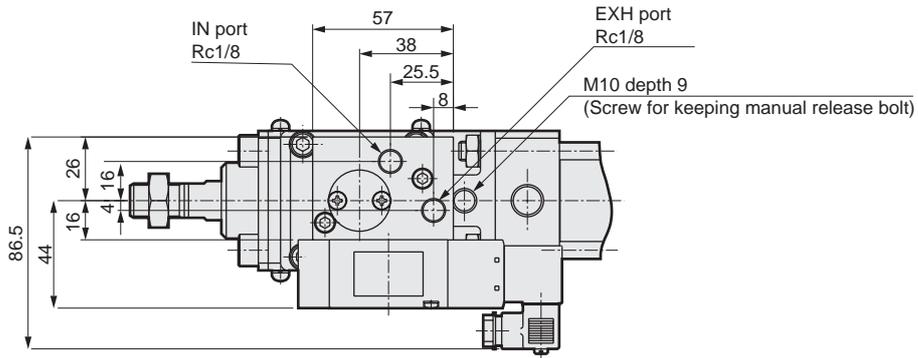

Symbol	A	B	C	D
Bore size (mm)				
$\phi 40$	31	91	71.5	83.5
$\phi 50$	36	96.5	76	86.5

● Note: Dimensions are same as standard except the above dimensions. Refer to page 1308.

With valve for brake
 ● JSC3-V-63 $\phi 63$

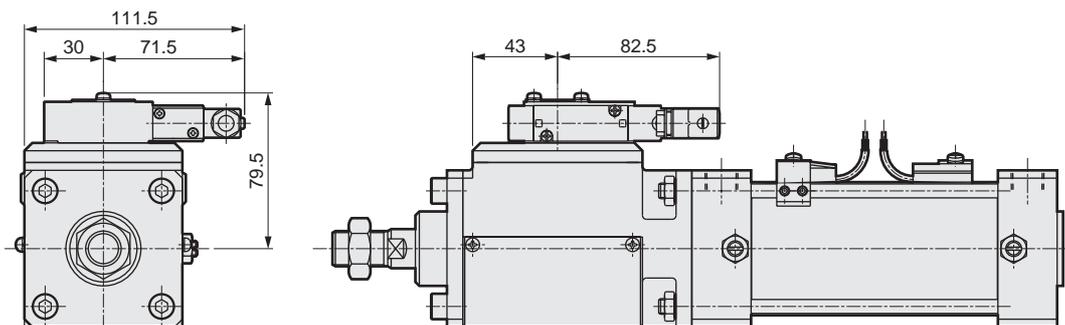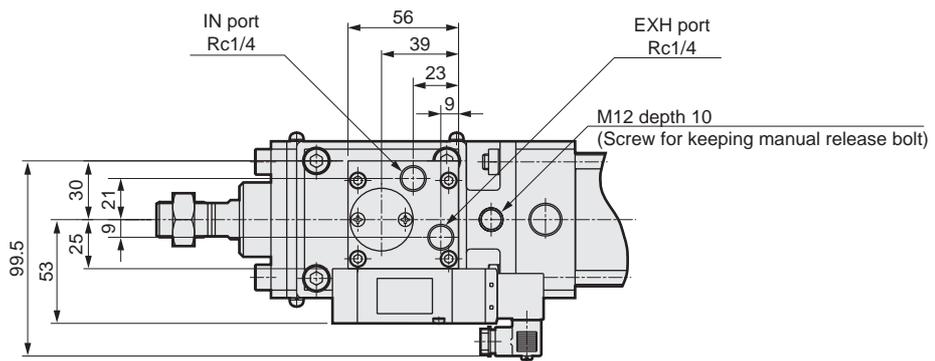


● Note: Dimensions are same as standard except the above dimensions. Refer to page 1308.

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Dimensions


With valve for brake

● JSC3-V-80 $\phi 80$

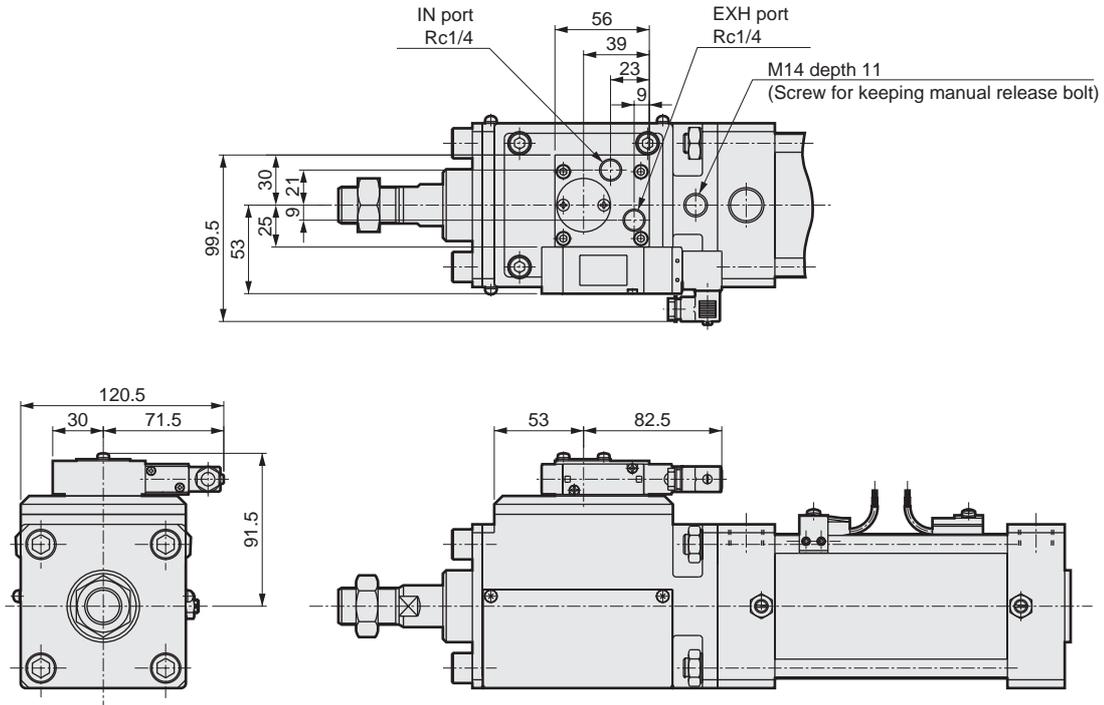

● Note: Dimensions are same as standard except the above dimensions. Refer to page 1308.

● JSC3-V-100 $\phi 100$

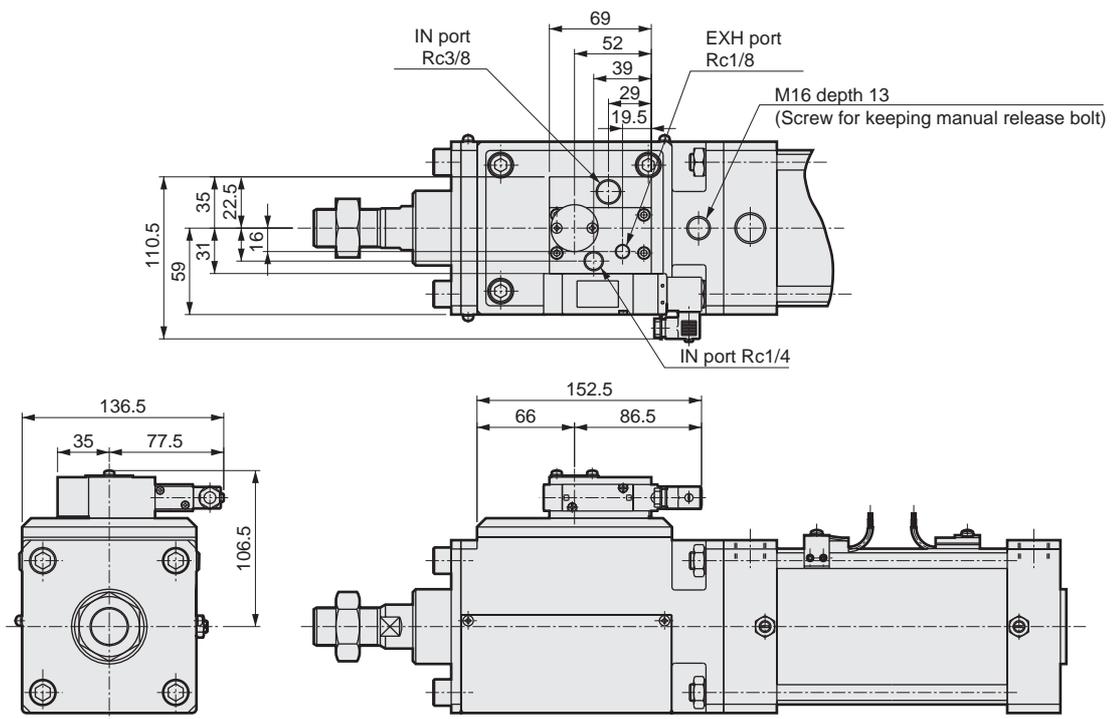

● Note: Dimensions are same as standard except the above dimensions. Refer to page 1308.

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Brake cylinder (medium and large bore size)
With brake

Discontinue

Brake cylinder Double acting low hydraulic type

JSC3-H Series

- Bore size: $\phi 40$, $\phi 50$, $\phi 63$, $\phi 80$, $\phi 100$
 $\phi 125$, $\phi 140$, $\phi 160$, $\phi 180$



Specifications

Descriptions		JSC3-H (with switch)				JSC3-H/JSC3-LH				JSC3-SH (with switch)							
Bore size	mm	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$		
Actuation		Double acting low hydraulic type								Double acting low pressure release, low hydraulic type							
Working fluid		Hydraulic fluid (compressed air for brake section)															
Max. working pressure	MPa	1.0															
Min. working pressure	Brake section	0.3															
	Cylinder section	0.2				0.1				0.2							
Withstanding pressure	MPa	1.6															
Ambient temperature	°C	5 to 50															
Port size	Brake section	Rc1/8		Rc1/4		Rc3/8		Rc1/2				Rc1/8		Rc1/4		Rc3/8	
	Cylinder section	Rc1/4		Rc3/8		Rc1/2		Rc1/2		Rc3/4		Rc1/4		Rc3/8		Rc1/2	
Stroke tolerance	mm	+0.9 0 (to 360),		+1.4 0 (to 1000)		+1.0 0 (to 300),		+1.4 0 (to 1000),		+1.8 0 (to 2000)		+0.9 0 (to 360),		+1.4 0 (to 1000)			
Cushion		Air cushion															
Effective cushion length	mm	14.6	16.6	20.6	23.6	21.6				14.6	16.6	20.6	23.6				
Stoppage accuracy	mm	±0.2 (50mm/s loadless)															
Holding force	N	980	1569	2451	3922	6178	9600	12000	15800	20000	784	1255	1961	3138	4941		
Allowable energy absorption	J	Note: The low hydraulic cylinder's cushion performance cannot absorb large energies. We recommend to use an external shock absorber together.															
		Note: If "No cushion" is selected, the large energy generated by the external load cannot be absorbed. We recommend to use an external shock absorber together.															

Note: The brakes are air-operated.

Stroke length

Bore size (mm)	Standard stroke length (mm)	Max. stroke length (mm)	Available stroke length (mm)	Min. stroke length (mm)	
$\phi 40$	50, 75, 100, 150, 200, 250, 300, 350, 400, 450, 500	600	1600	1	
$\phi 50$			2000		
$\phi 63$		700	2500		
$\phi 80$			800		2000
$\phi 100$		900			
$\phi 125$					
$\phi 140$					
$\phi 160$					
$\phi 180$					

Note 1: If the max. stroke is exceeded, product specifications may not be met, depending on operating conditions. Refer to Ending 74.

Note 2: Custom stroke length is available per 1mm increment.

Min. stroke length of type with switch (T type switch)

- T0/T5 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation	Head end trunnion installation
	A position can not be detected at rod side stroke end.													
Bore size	1	2	3	4	1	2	3	4	1	2	3	4	1	1
$\phi 40$	20 (10)	20 (20)	40 (40)	60 (60)	20 (10)	60 (45)	105 (75)	150 (105)	110 (110)	110 (110)	175 (145)	175 (145)	50 (50)	50 (50)
$\phi 50$	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	20 (20)	65 (50)	65 (60)	135 (135)	135 (135)	135 (135)	135 (135)	60 (60)	60 (60)
$\phi 63$	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	20 (20)	70 (55)	70 (60)	110 (95)	110 (95)	110 (100)	110 (100)	50 (45)	50 (45)
$\phi 80$	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	115 (85)	115 (85)	115 (105)	115 (105)	55 (40)	55 (40)
$\phi 100$	15 (15)	25 (25)	45 (45)	70 (70)	15 (15)	25 (25)	70 (55)	70 (70)	125 (95)	125 (95)	125 (115)	125 (115)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

Min. stroke length of type with switch (T type switch)

● T8 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation	Head end trunnion installation
	A position can not be detected at rod side stroke end.													
Bore size	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ40	15 (10)	20 (20)	40 (40)	60 (60)	15 (10)	50 (35)	95 (65)	140 (95)	95 (85)	95 (85)	155 (125)	155 (125)	45 (40)	45 (40)
φ50	10 (10)	20 (20)	40 (40)	60 (60)	10 (10)	20 (20)	70 (55)	70 (60)	115 (115)	115 (115)	135 (135)	135 (135)	50 (50)	50 (50)
φ63	10 (10)	20 (20)	40 (40)	60 (60)	10 (10)	20 (20)	70 (55)	70 (60)	95 (75)	95 (75)	110 (110)	110 (110)	45 (35)	45 (35)
φ80	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	100 (70)	100 (70)	115 (115)	115 (115)	50 (35)	50 (35)
φ100	15 (15)	25 (25)	45 (45)	65 (65)	15 (15)	25 (25)	70 (55)	70 (65)	110 (80)	110 (80)	125 (125)	125 (125)	55 (40)	55 (40)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

● T2/T3 type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation	Head end trunnion installation
	A position can not be detected at rod side stroke end.													
Bore size	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ40	20 (10)	20 (15)	25 (25)	40 (40)	20 (10)	60 (45)	105 (75)	150 (105)	105 (75)	105 (75)	165 (135)	165 (135)	50 (35)	50 (35)
φ50	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	105 (75)	105 (75)	105 (75)	105 (75)	45 (30)	45 (30)
φ63	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	110 (80)	110 (80)	110 (85)	110 (85)	50 (35)	50 (35)
φ80	15 (10)	15 (15)	30 (30)	45 (45)	15 (10)	15 (15)	60 (45)	60 (45)	115 (85)	115 (85)	115 (90)	115 (90)	55 (40)	55 (40)
φ100	10 (10)	15 (15)	30 (30)	45 (45)	10 (10)	15 (15)	60 (45)	60 (45)	125 (95)	125 (95)	125 (100)	125 (100)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire).

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

● T1/T2Y/T3Y/T2YD type min. stroke length with switch

Switch quantity	Different surface installation				Same surface installation				Center trunnion installation				Rod end trunnion installation	Head end trunnion installation
	A position can not be detected at rod side stroke end.													
Bore size	1	2	3	4	1	2	3	4	1	2	3	4	1	1
φ40	20 (10)	20 (15)	25 (25)	40 (40)	20 (10)	60 (45)	105 (75)	150 (105)	105 (75)	105 (75)	165 (135)	165 (135)	50 (35)	50 (35)
φ50	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	100 (70)	100 (70)	100 (75)	100 (75)	45 (30)	45 (30)
φ63	15 (10)	15 (15)	25 (25)	40 (40)	15 (10)	15 (15)	60 (45)	60 (45)	105 (75)	105 (75)	105 (85)	105 (85)	50 (35)	50 (35)
φ80	15 (10)	15 (15)	30 (30)	45 (45)	15 (10)	15 (15)	60 (45)	60 (45)	110 (80)	110 (80)	110 (90)	110 (90)	55 (40)	55 (40)
φ100	10 (10)	15 (15)	30 (30)	45 (45)	10 (10)	15 (15)	60 (45)	60 (45)	120 (90)	120 (90)	120 (100)	120 (100)	60 (45)	60 (45)

Note 1: Value in () for T*V (Radial lead wire). Note that radial lead wire (V) is not available for T2YD.

Note 2: When stroke length is shorter than 15 mm, two switches could turn ON at the same time. In this case, adjust the distance between switches as far as possible.

Min. stroke length of type with switch (R type switch)

● φ125 to φ180

(Unit: mm)

Descriptions	Stroke length when same surface installation	Stroke length when center trunnion installation	Stroke length when rod end trunnion installation	Stroke length when head end trunnion installation
Bore size (mm)				
φ125		120 and over	70 and over	
φ140	20 and over	125 and over	75 and over	
φ160	* (25 and over)	130 and over	80 and over	
φ180		135 and over	85 and over	

*The minimum stroke length for R2YK and R3YK.

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size) With brake

Switch specifications (T type switch)

● 1 color/2 color indicator/strong magnetic field proof

*The T0/T5 switch can be used with 220 VAC . Consult CKD for working conditions.

Descriptions	Proximity 2 wire			Proximity 3 wire			Reed 2 wire					Proximity 2 wire			
	T1H/T1 V	T2H/T2V/ T2JH/T2JV	T2YH/T2YV	T3H/T3V	T3PH/T3PV (Custom order)	T3YH/T3YV	T0H/T0V	T5H/T5V		T8H/T8V		T2YD*/T2YDPT*			
Applications	Programmable controller relay, small solenoid valve	Programmable controller		Programmable controller, relay			Programmable controller, relay	Programmable controller, relay, IC circuit (w/o indicator light), serial connection		Programmable controller, relay		Programmable controller			
Output method	-			NPN output	PNP output	NPN output	-								
Power voltage	-			10 to 28 VDC			-								
Load voltage	85 to 265 VAC	10 to 30 VDC		30 VDC or less			12/24 VDC	110 VAC	5/12/24 VDC	110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%	
Load current	5 to 100mA	5 to 20mA (Note 10)		100mA or less			50mA or less	5 to 50mA	7 to 20mA	50mA or less	20mA or less	5 to 50mA	7 to 20mA	7 to 10mA	5 to 20mA
Light	LED (ON lighting)	LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	Green LED (ON lighting)	Red/green LED (ON lighting)	LED (ON lighting)	Without indicator light		LED (ON lighting)		Red/green LED (ON lighting)			
Leakage current	1mA or less with 100 VAC 2mA or less with 200 VAC	1mA or less		10 μA or less			0mA					1mA or less			

● With preventive maintenance output

Descriptions	Proximity 3 wire		Proximity 4 wire		Proximity 3 wire		Proximity 4 wire			
	T2YFH/V		T3YFH/V		T2YMH/V		T3YMH/V			
Applications	Programmable controller		Programmable controller, relay		Programmable controller		Programmable controller, relay			
Output method	NPN output									
Light	Installation position adjustment section		Red/green LED (ON lighting)							
	Preventive maintenance output		-		Yellow LED (ON lighting)					
Regular Output	Power voltage		-		10 to 28 VDC		-		10 to 28 VDC	
	Load voltage		10 to 30 VDC		30 VDC or less		10 to 30 VDC		30 VDC or less	
	Load current		5 to 20mA		50mA or less		5 to 20mA		50mA or less	
	Leakage current		1mA or less		10 μA or less		1.2mA or less		10 μA or less	
Preventive maintenance Output	Load voltage		30 VDC or less							
	Load current		20mA or less		50mA or less		5 to 20mA or less		50mA or less	
	Leakage current		10 μA or less							

Note 1: Refer to Ending 1 for other switches.

Note 2: Max. load current above: 20mA at 25 °C . The current will be lower than 20mA if ambient temperature around switch is higher than 25 °C . (5 to 10mA at 60 °C)

Switch specifications (R type switch/H type switch)

● Proximity switch

Descriptions	Proximity 2 wire			Proximity 3 wire		
	R1/R1K	R2/R2K	R2Y/R2YK (2 color indicator type)	R3/R3K	R3Y/R3YK (2 color indicator type)	
Applications	Programmable controller, relay, small solenoid valve		Programmable controller		Programmable controller, relay, IC circuit or solenoid valve	
Output method	NPN output					
Power voltage	4.5 to 28 VDC					
Load voltage and current	85 to 265 VAC, 5 to 100mA		10 to 30 VDC, 5 to 30mA			30 VDC or less
						200mA or less
Light	LED (ON lighting)			Red/green LED (ON lighting)	LED (ON lighting) / Red/green LED (ON lighting)	
Leakage current	1mA or less with 100 VAC 2mA or less with 200 VAC		1mA or less	1.2mA or less	10 μA or less	

● Reed switch

Descriptions	Reed 2 wire					
	R0	R4	R5	R6	H0	H0Y (2 color indicator type)
Applications	Relay, programmable controller	High capacity relay, solenoid valve	Programmable controller, relay, IC circuit (w/o indicator light), serial connection	Programmable controller dedicated (with DC self hold)	Relay, programmable controller	Programmable controller dedicated
Load voltage and current	12/24 VDC, 5 to 50mA 110 VAC, 7 to 20mA 220 VAC, 7 to 10mA	110 VAC, 20 to 200mA 220 VAC, 10 to 200mA	5/12/24 VDC, 50mA or less 110 VAC, 20mA or less 220 VAC, 10mA or less	24 VDC, 5 to 50mA	12/24 VDC 110 VAC 5 to 50mA 7 to 20mA	24 VDC, 5 to 20mA (Note 2)
Light	LED ON lighting	Neon light OFF lighting	None	LED ON lighting	Green LED ON lighting	Red/green LED ON lighting
Leakage current	0mA	1mA or less	0mA	0.1mA or less	10 μA or less	

Note 1: Refer to Ending 1 for other switch specifications.

Note 2: The maximum load current is applied at 25 °C . The current will be lower than 20mA if ambient temperature around switch is higher than 25 °C . (5 to 10mA when 60 °C)

Cylinder weight

● $\phi 40$ to $\phi 100$

(Unit: kg)

Descriptions, mounting style	Product weight when stroke length (S) = 0mm						Weight per switch (including mounting bracket)					Additional weight per S = 100mm
							T type	H type		T2YD type		
	Bore size (mm)	Basic type (00)	Foot type (LB)	Flange type (FA, FB)	Eye bracket type (CA)	Clevis bracket type (CB)		Trunnion type (TC)	1m	3m	1m	
$\phi 40$	2.48	2.66	2.91	2.83	2.83	2.86	0.018	0.10	0.20	0.08	0.17	0.39
$\phi 50$	3.47	3.67	3.97	3.87	3.87	3.97						0.46
$\phi 63$	5.09	5.49	6.19	5.79	5.79	5.89						0.50
$\phi 80$	8.15	8.85	9.95	9.65	9.65	9.45						0.90
$\phi 100$	14.70	15.70	17.40	16.90	16.90	17.30						1.12

(E.g.) Product weight of JSC3-H-LB-50B-200-R0-D

Product weight when S = 0mm3.67kg
 Additional weight when S = 200mm $0.46 \times \frac{200}{100} = 0.92$ (kg)
 Weight of two switches $0.018\text{kg} \times 2 = 0.036\text{kg}$
 Product weight $3.67\text{kg} + 0.92\text{kg} + 0.036\text{kg} = 4.626\text{kg}$

● $\phi 125$ to $\phi 180$

(Unit: kg)

Descriptions, mounting style	Product weight when stroke length (S) = 0mm					Additional weight per S = 100mm	R type		H type		T2YD type		
	Bore size (mm)	Axial foot type	Flange type	Eye bracket type	Clevis bracket type		Trunnion type	Grommet	Terminal box	1m	3m	1m	3m
		(LB)	(FA and FB)	(CA)	(CB)		(TC, TA, TB)						
$\phi 125$	33.3	35.1	34.8	34.9	35.2	2.60	0.10	0.09	0.10	0.20	0.08	0.17	
$\phi 140$	43.8	47.2	45.6	45.8	45.0	2.96							
$\phi 160$	56.8	60.6	58.7	59.0	60.1	3.57							
$\phi 180$	79.6	87.1	82.5	83.0	83.2	4.94							

(E.g.) JSC3-H-LB-125B-300

Product weight when S = 0mm33.3kg
 Additional weight when S=300mm $2.60 \times \frac{300}{100} = 7.8\text{kg}$
 Product weight when S=300mm $33.3 + 7.8 = 41.1\text{kg}$

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

JSC3-H Series

How to order (φ 40 to φ 100)

Without switch



With switch



Strong magnetic field proof (H0, H0Y switch) with switch



Model no.



Note on model no. selection

Note 1: The mounting bracket is shipped with the product. (Special head end flange type is attached when shipped.)

Note 2: Refer to Ending 74 if max. stroke length is exceeded.

Note 3: Refer to page 1334 for min. stroke length with switch.

Note 4: T2YD, T2YDT, H0 and H0Y is strong magnetic field proof switch.

Note 5: When selecting TA or TB for mounting, the number of switches is limited to "H" (one on rod end) for TA, and "R" (one on rod end) for TB.

Note 6: Refer to each dimensions to confirm indication of "S", "T", and "G" positions.

Note 7: "I" and "Y" can not be selected at the same time.

Note 8: Refer to Ending 89 for custom specifications of rod end form.

<Example of model number>

JSC3-H-LB-40B-50-T0H-R-S-I

Model: Brake cylinder double acting low hydraulic type

- A** Brake release pressure : Standard type 0.3MPa
- B** Mounting style : Axial foot type
- C** Bore size : φ 40mm
- D** Port thread type : Rc thread
- E** Cushion : Both sides cushioned
- F** Stroke length : 50mm
- G** Switch model no. : Reed switch T0H, lead wire 1m
- H** Switch quantity : One on rod end
- I** Option : Cushion needle position S
- J** Accessory : Rod eye

Symbol	Descriptions		
A Brake release pressure			
Blank	Standard type 0.3MPa		
S	Low pressure release type 0.25MPa		
B Mounting style			
00	Basic type		
LB	Axial foot type		
FA	Rod end flange type		
FB	Head end flange type		
FC	Special head end flange type		
CA	Eye bracket type		
CB	Clevis bracket type (pin and snap ring attached)		
TC	Center trunnion type		
TA	Rod end trunnion type		
TB	Head end trunnion type		
C Bore size (mm)			
40	φ40		
50	φ50		
63	φ63		
80	φ80		
100	φ100		
D Port thread type			
Blank	Rc thread		
N	NPT thread (custom order)		
G	G thread (custom order)		
E Cushion			
B	Both sides cushion		
R	Rod end cushion		
H	Head end cushion		
N	No cushion		
F Stroke length (mm)			
Bore size	Stroke length Note 2	Available stroke length	Custom stroke length
φ40	1 to 600	1600	1 mm increment
φ50	1 to 600	2000	
φ63	1 to 600	2500	
φ80	1 to 700	2500	
φ100	1 to 800	2500	
G Switch model no.			
Refer to the following page for switch model no.			
*Lead wire length			
Blank	1m (standard)		
3	3m (option)		
5	5m (option)		
H Switch quantity			
R	One on rod end		
H	One on rod head		
D	Two		
T	Three		
4	Four (If more than 4 switches, indicate switch quantity)		
I Option			
		Max. ambient temperature	Instantaneous max. temperature
J	Bellows	100 °C	200 °C
L	Bellows	250 °C	400 °C
M	Piston rod material (stainless steel)		
Blank	Cushion needle position R (standard)		
S	Cushion needle position S		
T	Cushion needle position T		
G	With indicator		
J Accessory			
I	Rod eye		
Y	Rod clevis (pin and snap ring attached)		
B1	Eye bracket		
B2	Clevis bracket (pin and snap ring attached)		
B3	Eye bracket		
B4	Trunnion type No. 2 bracket		

How to order mounting bracket

● φ 40 to φ 100

Bore size (mm)	φ 40	φ 50	φ 63	φ 80	φ 100
Foot (LB)	S1-LB-40	S1-LB-50	S1-LB-63	S1-LB-80	S1-LB-100
Flange (FB)	JSC3-40-FB	JSC3-50-FB	JSC3-63-FB	JSC3-80-FB	JSC3-100-FB
Eye (CA)	S1-CA-40	S1-CA-50	S1-CA-63	S1-CA-80	S1-CA-100
Clevis (CB)	S1-CB-40	S1-CB-50	S1-CB-63	S1-CB-80	S1-CB-100

JSC3-H Series

How to order (φ125 to φ180)

Without switch



With switch



A Mounting style
Note 1

B Bore size

C Port thread type

D Cushion

E Stroke length
Note 2

F Switch model no.
Note 4

G Switch quantity
Note 5

H Option
Note 6

I Accessory
Note 7

⚠ Note on model no. selection

- Note 1: The mounting bracket is shipped with the product.
- Note 2: If the max. stroke length is exceeded, refer to Ending 74.
- Note 3: Refer to page 1334 for min. stroke length with switch.
- Note 4: The type with switch is the custom order. Note that dimensions will change.
- Note 5: When selecting TA or TB for mounting, the number of switches is limited to "H" (one on head end) for TA, and "R" (one on rod end) for TB.
- Note 6: Refer to each dimensions to confirm indication of cushion needle position.
- Note 7: "I""Y" can not be selected at the same time.
- Note 8: Refer to Ending 89 for custom specifications of rod end form.**

<Example of model number>

JSC3-LH-LB-125B-50-R0-R-S-I

Model: Brake cylinder low hydraulic type

- A** Mounting style : Axial foot type
- B** Bore size : φ125mm
- C** Port thread type : Rc thread
- D** Cushion : Both sides cushioned
- E** Stroke length : 50mm
- F** Switch model no. : Reed switch R0
- G** Switch quantity : One on rod end
- H** Option : Cushion needle position S
- I** Accessory : Rod eye

Symbol	Descriptions
A Mounting style	
LB	Axial foot type
FA	Rod end flange type
FB	Head end flange type
CA	Eye bracket type
CB	Clevis bracket type (pin and snap ring attached)
TC	Center trunnion type
TA	Rod end trunnion type
TB	Head end trunnion type

B Bore size (mm)	
125	φ125
140	φ140
160	φ160
180	φ180

C Port thread type	
Blank	Rc thread
N	NPT thread (custom order)
G	G thread (custom order)

D Cushion	
B	Both sides cushion
R	Rod end cushion
H	Head end cushion
N	No cushion

E Stroke length (mm)			
Bore size	Stroke length Note 3	Available stroke length	Custom stroke length
φ125	1 to 800	2000	By 1 mm increment
φ140	1 to 800	2000	
φ160	1 to 800	2000	
φ180	1 to 900	2000	

F Switch model no.					
Grommet type	Terminal box type		Contact	Indicator	Lead wire
	Standard type	Splash-proof			
R1K*	R1KB	R1KA	Proximity	1 color indicator type	2-wire
R2K*	R2KB	R2KA		2 color indicator type	
R2YK*	R2YKB	R2YKA		Strong magnetic field proof switch	
T2YDP*	-	-	Reed	1 color indicator type	3-wire
T2YDPT*	-	-		2 color indicator type	
R0*	ROB	R0A		1 color indicator type	
R4*	R4B	R4A	Reed	indicator type	2-wire
R5*	R5B	R5A		(Without indicator light)	
R6*	R6B	R6A		1 color indicator type	

*Lead wire length	
Blank	1m (standard)
3	3m (option)
5	3m (option)


G Switch quantity	
R	One on rod end
H	One on rod head
D	Two
T	Three
4	Four (If more than 4 switches, indicate switch quantity)

H Option			
		Max. ambient temperature	Instantaneous max. temperature
J	Bellows	60 °C	100 °C
K	Bellows	100 °C	200 °C
L	Bellows	250 °C	400 °C
M	Piston rod material (stainless steel)		
Blank	Cushion needle position R (standard)		
S	Cushion needle position S		
T	Cushion needle position T		
C2	Cushion mechanism with check valve		

I Accessory	
I	Rod eye
Y	Rod clevis (pin and snap ring attached)
B1	Eye bracket
B2	Clevis bracket (pin and snap ring attached)

JSC3-H Series

Internal structure and parts list ($\phi 40$ to $\phi 100$)

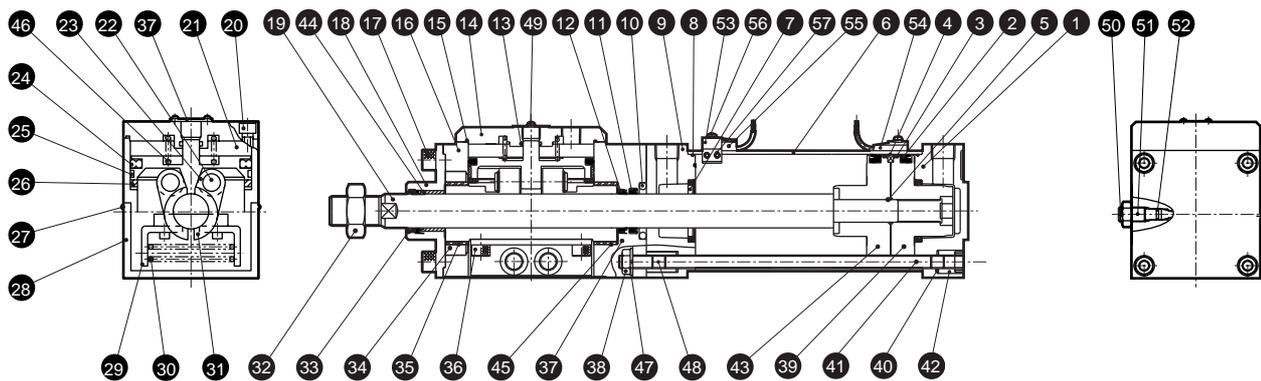


Products No.	Parts name	Material	Remarks	Products No.	Parts name	Material	Remarks
1	Head cover	Aluminum alloy die-casting	Paint	28	Cover	Steel	Paint
2	Piston packing seal	Nitrile rubber		29	Spring holder	Steel	Zinc chromate
3	Wear ring	Polyacetal resin		30	Spring	Steel	
4	Magnet	Plastic		31	Brake shoe metal	Cast iron	Nickeling
5	Piston gasket	Nitrile rubber		32	Rod nut	Steel	Zinc chromate
6	Cylinder tube	Aluminum alloy	Hard alumite	33	Dust wiper	Nitrile rubber	
7	Cushion packing seal	Urethane rubber		34	DU ring	Steel	Blackening
8	Cylinder gasket	Nitrile rubber		35	Bush	Oil impregnated bearing alloy	
9	Rod cover	Aluminum alloy die-casting	Paint	36	Hexagon socket head cap bolt	Alloy steel	Blackening
10	Metal seal	Nitrile rubber		37	Dust cover	Aluminum alloy	Paint
11	Rod packing seal	Nitrile rubber		38	Hexagon nut	Steel	Blackening
12	Dust wiper	Nitrile rubber		39	Piston H	Aluminum alloy die-casting	
13	Cap gasket A	Nitrile rubber		40	Tie rod	Steel	Zinc chromate
14	Main body cap	Cast iron	Nitriding	41	Conical spring washer	Steel	Blackening
15	Cap gasket B	Nitrile rubber		42	Round nut	Steel	Zinc chromate
16	Brake	Aluminum alloy casting	Alumite	43	Piston R	Aluminum alloy die-casting	
17	Hexagon socket head cap bolt	Alloy steel	Blackening	44	Bush B	Oil impregnated bearing alloy	
18	Rod bushing	Steel	Phosphoric acid mangan	45	Thrust washer		
19	Piston rod	Steel	Industrial chrome plating	46	Spring	Steel	Paint
20	Hexagon socket head cap bolt	Alloy steel	Blackening	47	Toothed washer	Steel	Blackening
21	Piston for brake	Cast iron	Phosphoric acid mangan	48	Hexagon socket head set screw	Steel	Blackening
22	Parallel pin	Steel		49	Washer assembly cross headed pan	Steel	Zinc chromate
23	Bearing			50	Cushion needle	Copper alloy	
24	Piston packing seal B	Nitrile rubber		51	Needle nut	Copper alloy	
25	Wear ring	Polyacetal resin		52	Needle gasket	Nitrile rubber	
26	Cushion rubber	Urethane rubber		With switch			
27	Cross headed pan	Steel	Zinc chromate	53	Switch installation unit	Aluminum alloy	
				54	Switch holder	Aluminum alloy	
				55	Cylinder switch		
				56	Cross headed pan	Steel	Zinc chromate
				57	Hexagon socket head set screw	Alloy steel	Blackening

Repair parts list

Bore size	Kit No.	Repair parts number
$\phi 40$	JSC3-H- 40K	
$\phi 50$	JSC3-H- 50K	2 3 7 8
$\phi 63$	JSC3-H- 63K	
$\phi 80$	JSC3-H- 80K	10 11 12 33 55
$\phi 100$	JSC3-H-100K	

Note: Specify the kit No. when placing an order.

Internal structure and parts list (φ125 to φ180)

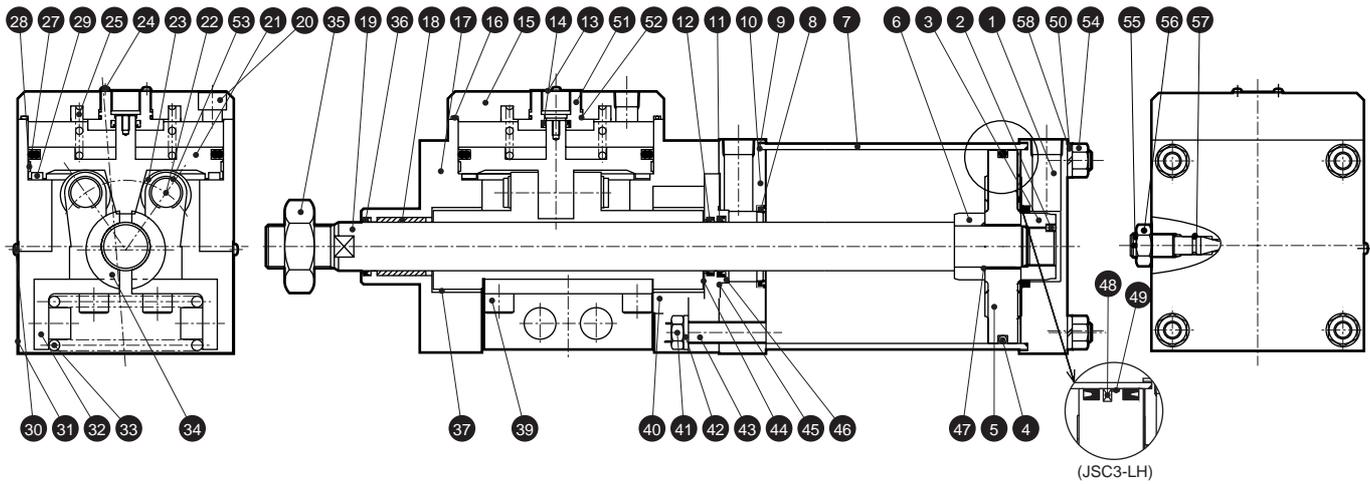

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Parts list

No.	Parts name	Material	Remarks	No.	Parts name	Material	Remarks
1	Head cover	Steel	Zinc chromate	29	Cushion rubber	Urethane rubber	
2	Hexagon socket head set screw	Alloy steel	Blackening	30	Cross headed pan	Steel	
3	Cushion ring (A)	Steel	Zinc chromate	31	Cover	Steel	
4	Piston packing seal	Nitrile rubber		32	Spring holder	Steel	Zinc chromate
5	Piston	φ125 to φ160 aluminum Alloy, φ180 cast iron		33	Spring	Piano wire	Blackening
6	Cushion ring (B)	Steel	Zinc chromate	34	Brake shoe metal	Cast iron	
7	Cylinder tube	Steel	Paint and industrial chrome plating	35	Rod nut	Steel	
8	Cushion packing seal	Nitrile rubber and steel		36	Dust wiper	Nitrile rubber	
9	Cylinder gasket	Nitrile rubber		37	Bush A	DU dry bearing	
10	Rod cover	Steel	Zinc chromate	39	Hexagon socket head cap bolt	Alloy steel	Blackening
11	Rod packing seal	Nitrile rubber		40	Ring	Steel	Blackening
12	Dust wiper	Nitrile rubber		41	Hexagon nut	Steel	Zinc chromate
13	Dust cover	Aluminum alloy		42	Toothed washer	Steel	Zinc chromate
14	Rod packing seal	Nitrile rubber		43	Tie rod	Steel	Zinc chromate
15	Main body cap	Cast iron		44	Thrust washer	Steel	
16	Cap gasket	Nitrile rubber		45	Metal gasket	Nitrile rubber	
17	Brake	Aluminum casting		46	Rod bushing	Steel	
18	Bush B	Oil impregnated bearing alloy		47	Piston gasket	Nitrile rubber	
19	Piston rod	Steel	Industrial chrome plating	48	Magnet	Rubber	Only JSC3-LH
20	Hexagon socket head cap bolt	Alloy steel	Blackening	49	Wear ring	Acetar resin	
21	Piston for brake	Cast iron		50	Spring washer	Steel	
22	Bearing pin	Steel		51	Main body cap	Cast iron	
23	Bearing	-		52	O ring	Nitrile rubber	
24	Washer assembly cross headed pan	Steel		53	E type snap ring	Steel	
25	Spring	Piano wire	Blackening	54	Hexagon nut	Steel	Zinc chromate
27	Piston packing seal B	Nitrile rubber		55	Cushion needle	Steel	Zinc chromate
28	Wear ring	Acetar resin		56	Needle nut	Steel	Zinc chromate
				57	Needle gasket	Nitrile rubber	
				58	Plain washer	Steel	Zinc chromate

Note 1: With JSC3-LH-125 to 160, the (7) cylinder tube is made of aluminum alloy, and the (48) magnet is built in.

Note 2: With JSC3-LH-180, the (5) piston and (7) cylinder tube are made of aluminum alloy, and the (48) magnet and (49) wear ring are built in.

Repair parts list

● JSC3-H

Bore size (mm)	Kit No.	Repair parts number
φ125	JSC3-H-125K	
φ140	JSC3-H-140K	4 8 9 11
φ160	JSC3-H-160K	12 36 45 57
φ180	JSC3-H-180K	

● JSC3-LH (with switch)

Bore size (mm)	Kit No.	Repair parts number
φ125	JSC3-LH-125K	
φ140	JSC3-LH-140K	4 49
φ160	JSC3-LH-160K	
φ180	JSC3-LH-180K	

Note: The JSC3-LH (with switch) consumable part is the JSC3-H consumable part with different piston packing and additional wear ring.

Brake cylinder (medium and large bore size)
With brake

JSC3-H Series

Dimensions

● $\phi 40$ to $\phi 100$


It is the same as the JSC3 (double acting single rod type). Refer to pages 1308 to 1317.

● $\phi 125$ to $\phi 180$

It is the same as the JSC3-N (double acting oil-free type). Refer to pages 1318 to 1325.

Note: LL dimensions of JSC3-H without switch differs from the dimensions of JSC3-LH with switch.

	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$
JSC3-H	291	318	350	373
JSC3-LH	311	338	367	388

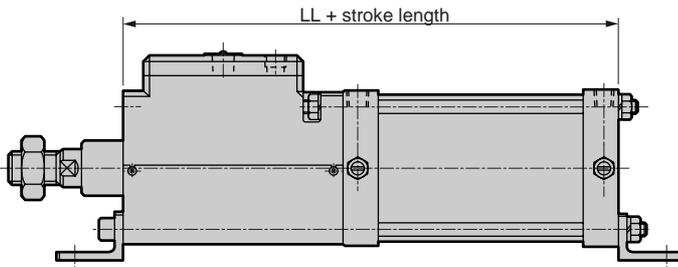


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Discontinue

Brake cylinder Double acting heat resistance type

JSC3-T Series

- Bore size: $\phi 40, \phi 50, \phi 63, \phi 80, \phi 100, \phi 125, \phi 140, \phi 160, \phi 180$



Specifications

Descriptions		JSC3-T								JSC3-ST												
Bore size	mm	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$							
Actuation		Double acting heat resistance type									Double acting low pressure release, heat resistance type											
Working fluid		Compressed air																				
Max. working pressure	MPa	1.0																				
Min. working pressure	MPa	0.3								0.25												
	MPa	0.1				0.05				0.1												
Withstanding pressure	MPa	1.6																				
Ambient temperature	°C	5 to 120																				
Port size	Brake section	Rc1/8		Rc1/4		Rc3/8		Rc1/2				Rc1/8		Rc1/4		Rc3/8						
	Cylinder section	Rc1/4	Rc3/8		Rc1/2				Rc3/4				Rc1/4	Rc3/8		Rc1/2						
Stroke tolerance	mm	+0.9 0	(to 360),		+1.4 0	(to 1000)		+1.0 0	(to 300),		+1.4 0	(to 1000),		+1.8 0	(to 2000)		+0.9 0	(to 360),		+1.4 0	(to 1000)	
Working piston speed	mm/s	50 to 1000 (used within allowable energy absorption)																				
Cushion		Air cushion																				
Effective cushion length	mm	14.6	16.6		20.6	23.6		21.6				14.6	16.6		20.6	23.6						
Lubrication (note)		Not available																				
Stoppage accuracy	mm	± 1.0 (300mm/s loadless)																				
Holding force	N	980	1569	2451	3922	6178	9600	12000	15800	20000	784	1255	1961	3138	4941							
	N	4.29	8.37	15.8	27.9	49.8	63.6	91.5	116	152	4.29	8.37	15.8	27.9	49.8							
Allowable energy absorption	J	0.067	0.079	0.079	0.201	0.301	0.371	0.386	0.386	0.958	0.067	0.079	0.079	0.201	0.301							
	J	Note: If "No cushion" is selected, the large energy generated by the external load cannot be absorbed. We recommend to use an external shock absorber together.																				

Note: Apply heat resistance grease periodically.

Stroke length

Bore size (mm)	Standard stroke length (mm)	Max. stroke length (mm)	Available stroke length (mm)	Min. stroke length (mm)
$\phi 140$	50, 75, 100, 150, 200, 250, 300, 350, 400, 450, 500	600	1600	1
$\phi 150$			2000	
$\phi 163$		700	2500	
$\phi 180$			800	
$\phi 100$				
$\phi 125$				
$\phi 140$				
$\phi 160$		900	2000	
$\phi 180$				

Note: If the max. stroke is exceeded, product specifications may not be met, depending on operating conditions. Refer to Ending 74.
Custom stroke length is available per 1mm increment.

Cylinder weight

- $\phi 40$ to $\phi 100$

(Unit: kg)

Descriptions, mounting style	Product weight when stroke length (S) = 0mm						Additional weight per S = 100mm
	Basic type (00)	Foot type (LB)	Flange type (FA and FB)	Eye bracket type (CA)	Clevis bracket type (CB)	Trunnion type (TC)	
$\phi 40$	2.48	2.66	2.91	2.83	2.83	2.86	0.39
$\phi 50$	3.47	3.67	3.97	3.87	3.87	3.97	0.46
$\phi 63$	5.09	5.49	6.19	5.79	5.79	5.89	0.50
$\phi 80$	8.15	8.85	9.95	9.65	9.65	9.45	0.90
$\phi 100$	14.70	15.70	17.40	16.90	16.90	17.30	1.12

(E.g.) Product weight of JSC3-T-LB-50B-200
 Product weight when S = 0mm 3.67kg
 Additional weight when S = 200mm $0.46 \times \frac{200}{100} = 0.92$ (kg)
 Product weight 3.67kg + 0.92kg = 4.59kg

- $\phi 125$ to $\phi 180$

(Unit: kg)


Descriptions, mounting style	Product weight when stroke length (S) = 0mm					Additional weight per S = 100mm
	Axial foot type (LB)	Flange type (FA and FB)	Eye bracket type (CA)	Clevis bracket type (CB)	Trunnion type (TC, TA or TB)	
$\phi 125$	33.3	35.1	34.8	34.9	35.2	2.60
$\phi 140$	43.8	47.2	45.6	45.8	45.0	2.96
$\phi 160$	56.8	60.6	58.7	59.0	60.1	3.57
$\phi 180$	79.6	87.1	82.5	83.0	83.2	4.94

(E.g.) LB-125B-300
 Product weight when S = 0mm 33.3kg
 Additional weight when S=300mm $2.60 \times \frac{300}{100} = 7.8$ kg
 Product weight when S=300mm 33.3 + 7.8 = 41.1kg

How to order

Without switch

JSC3 - **T** - **LB** - **40** - **B** - **50** - **S** - **I**

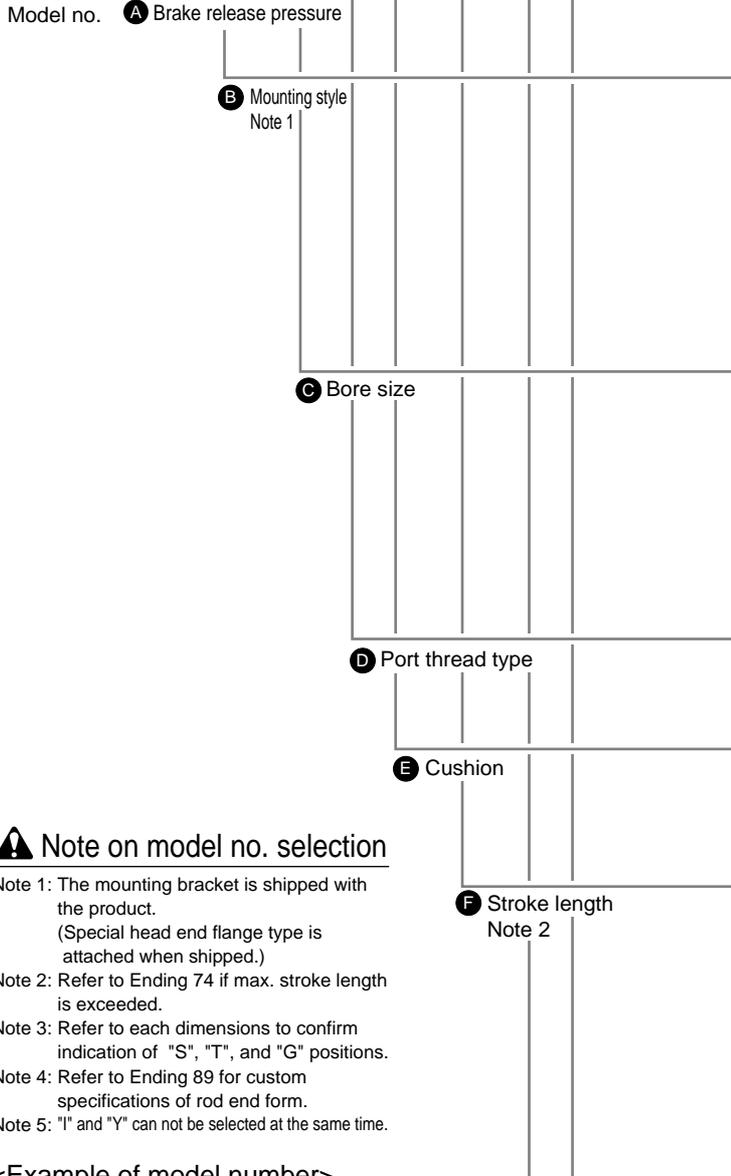

⚠ Note on model no. selection

- Note 1: The mounting bracket is shipped with the product.
(Special head end flange type is attached when shipped.)
- Note 2: Refer to Ending 74 if max. stroke length is exceeded.
- Note 3: Refer to each dimensions to confirm indication of "S", "T", and "G" positions.
- Note 4: Refer to Ending 89 for custom specifications of rod end form.
- Note 5: "I" and "Y" can not be selected at the same time.

<Example of model number>

JSC3-T-LB-40B-50-SI

Model: Brake cylinder double acting heat resistance type

- A** Brake release pressure: Standard type 0.3MPa
- B** Mounting style : Axial foot type
- C** Bore size : ϕ 40mm
- D** Port thread type : Rc thread
- E** Cushion : Both sides cushioned
- F** Stroke length : 50mm
- G** Option : Cushion needle position S
- H** Accessory : Rod eye

How to order mounting bracket

● ϕ 40 to ϕ 100

Bore size (mm)	ϕ 40	ϕ 50	ϕ 63	ϕ 80	ϕ 100
Mounting bracket					
Foot (LB)	S1-LB-40	S1-LB-50	S1-LB-63	S1-LB-80	S1-LB-100
Flange (FB)	JSC3-40-FB	JSC3-50-FB	JSC3-63-FB	JSC3-80-FB	JSC3-100-FB
Eye (CA)	S1-CA-40	S1-CA-50	S1-CA-63	S1-CA-80	S1-CA-100
Clevis (CB)	S1-CB-40	S1-CB-50	S1-CB-63	S1-CB-80	S1-CB-100

Note 1: The foot type mounting bracket is supplied as a two-piece set.


Symbol	Descriptions		
A Brake release pressure			
Blank	Standard type 0.3MPa		
S	Low pressure release type 0.25MPa		
B Mounting style			
00	Basic type (ϕ 125 to ϕ 180 can not be selected.)		
LB	Axial foot type		
FA	Rod end flange type		
FB	Head end flange type		
FC	Special head end flange type		
CA	Eye bracket type		
CB	Clevis bracket type (pin and snap ring attached)		
TC	Center trunnion type		
TA	Rod end trunnion type		
TB	Head end trunnion type		
C Bore size (mm)			
40	ϕ 40		
50	ϕ 50		
63	ϕ 63		
80	ϕ 80		
100	ϕ 100		
125	ϕ 125		
140	ϕ 140		
160	ϕ 160		
180	ϕ 180		
D Port thread type			
Blank	Rc thread		
N	NPT thread (custom order)		
G	G thread (custom order)		
E Cushion			
B	Both sides cushioned		
R	Rod end cushion		
H	Head end cushion		
N	No cushion		
F Stroke length (mm)			
Bore size	Stroke length	Available stroke length	Custom stroke length
ϕ 40	1 to 600	1600	1 mm increment
ϕ 50	1 to 600	2000	
ϕ 63	1 to 600	2500	
ϕ 80	1 to 700	2500	
ϕ 100	1 to 800	2500	
ϕ 125	1 to 800	2000	
ϕ 140	1 to 800	2000	
ϕ 160	1 to 800	2000	
ϕ 180	1 to 900	2000	
G Option			
		Max. ambient temperature	Instantaneous max. temperature
L	Bellows	250°C	400°C
M	Piston rod material (stainless steel)		
Blank	Cushion needle position R (standard)		
S	Cushion needle position S		
T	Cushion needle position T		
G	With indicator (for ϕ 40 to ϕ 100)		
C2	Cushion mechanism with check valve (for ϕ 125 to ϕ 180)		
H Accessory			
I	Rod eye		
Y	Rod clevis (pin and snap ring attached)		
B1	Eye bracket		
B2	Clevis bracket (pin and snap ring attached)		
B3	Eye bracket (for ϕ 40 to ϕ 100)		
B4	Trunnion type No. 2 bracket (for ϕ 40 to ϕ 100)		

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size) with brake

JSC3-T Series

Internal structure and parts list (φ40 to φ100)

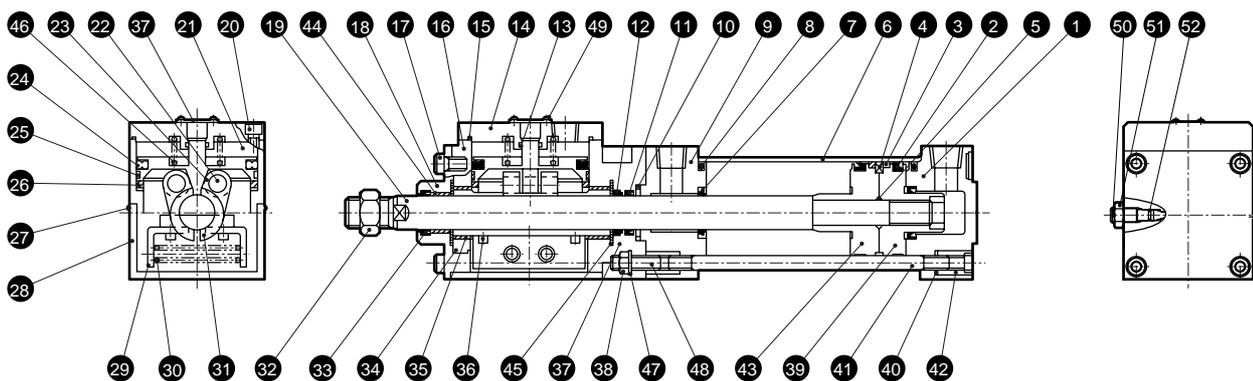


Products No.	Parts name	Material	Remarks	Products No.	Parts name	Material	Remarks
1	Head cover	Aluminum alloy die-casting	Paint	28	Cover	Steel	Paint
2	Piston packing seal	Fluoro rubber		29	Spring holder	Steel	Zinc chromate
3	Wear ring	Tetrafluoroethylene resin		30	Spring	Steel	
4	Piston ring	Steel		31	Brake shoe metal	Cast iron	Nickeling
5	Piston gasket	Fluoro rubber		32	Rod nut	Steel	Zinc chromate
6	Cylinder tube	Aluminum alloy	Hard alumite	33	Dust wiper	Fluoro rubber	
7	Cushion packing seal	Fluoro rubber		34	DU ring	Steel	Blackening
8	Cylinder gasket	Fluoro rubber		35	Bush	Oil impregnated bearing alloy	
9	Rod cover	Aluminum alloy die-casting	Paint	36	Hexagon socket head cap bolt	Alloy steel	Blackening
10	Metal seal	Fluoro rubber		37	Dust cover	Aluminum alloy	Paint
11	Rod packing seal	Fluoro rubber		38	Hexagon nut	Steel	Blackening
12	Dust wiper	Fluoro rubber		39	Piston H	Aluminum alloy die-casting	
13	Cap gasket A	Fluoro rubber		40	Tie rod	Steel	Zinc chromate
14	Main body cap	Cast iron	Nitriding	41	Conical spring washer	Steel	Blackening
15	Cap gasket B	Fluoro rubber		42	Round nut	Steel	Zinc chromate
16	Brake	Aluminum alloy casting	Alumite	43	Piston R	Aluminum alloy die-casting	
17	Hexagon socket head cap bolt	Alloy steel	Blackening	44	Bush B	Oil impregnated bearing alloy	
18	Rod bushing	Steel	Phosphoric acid mangan	45	Thrust washer		
19	Piston rod	Steel	Industrial chrome plating	46	Spring	Steel	Paint
20	Hexagon socket head cap bolt	Alloy steel	Blackening	47	Toothed washer	Steel	Blackening
21	Piston for brake	Cast iron	Phosphoric acid mangan	48	Hexagon socket head set screw	Steel	Blackening
22	Parallel pin	Steel		49	Washer assembly cross headed pan	Steel	Zinc chromate
23	Bearing			50	Cushion needle	Copper alloy	
24	Piston packing seal B	Fluoro rubber		51	Needle nut	Copper alloy	
25	Wear ring	Special plastic		52	Needle gasket	Fluoro rubber	
26	Cushion rubber	Flouro silicon rubber					
27	Cross headed pan	Steel	Zinc chromate				

Repair parts list

Bore size (mm)	Kit No.	Repair parts number
φ 40	JSC3-T- 40K	
φ 50	JSC3-T- 50K	2 3 7 8
φ 63	JSC3-T- 63K	
φ 80	JSC3-T- 80K	10 11 12 33 52
φ 100	JSC3-T-100K	

Note: Specify the kit No. when placing an order

Internal structure and parts list (ϕ 125 to ϕ 180)

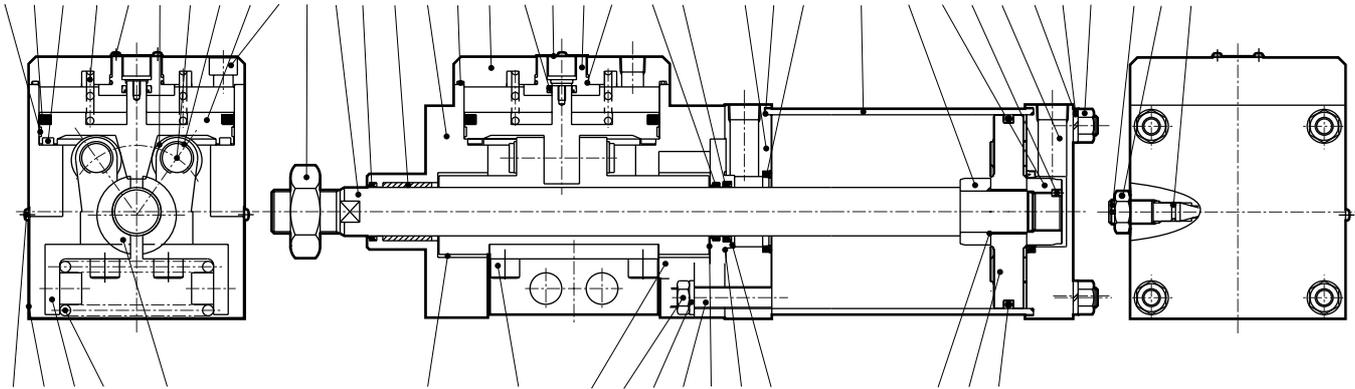

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC
Ending

Parts list

No.	Parts name	Material	Remarks	No.	Parts name	Material	Remarks
1	Head cover	Steel	Zinc chromate	27	Piston packing seal B	Fluoro rubber	
2	Hexagon socket head set screw	Alloy steel	Blackening	28	Wear ring	Acetar resin	
3	Cushion ring (A)	Steel	Zinc chromate	29	Cushion rubber	Silicon rubber	
4	Piston packing seal	Fluoro rubber		30	Cross headed pan	Steel	
5	Piston	ϕ 125 to ϕ 160 Aluminum alloy, ϕ 180 Cast iron		31	Cover	Steel	
6	Cushion ring (B)	Steel	Zinc chromate	32	Spring holder	Steel	Zinc chromate
7	Cylinder tube	Steel	Paint and industrial chrome plating	33	Spring	Piano wire	Blackening
8	Cushion packing seal	Fluoro rubber and steel		34	Brake shoe metal	Cast iron	
9	Cylinder gasket	Fluoro rubber		35	Rod nut	Steel	
10	Rod cover	Steel	Zinc chromate	36	Dust wiper	Fluoro rubber	
11	Rod packing seal	Fluoro rubber		37	Bush A	DU dry bearing	
12	Dust wiper	Fluoro rubber		39	Hexagon socket head cap bolt	Alloy steel	Blackening
13	Dust cover	Aluminum alloy		40	Ring	Steel	Blackening
14	Rod packing seal	Fluoro rubber		41	Hexagon nut	Steel	Zinc chromate
15	Main body cap	Cast iron		42	The toothed washer	Steel	Zinc chromate
16	Cap gasket	Fluoro rubber		43	Tie rod	Steel	Zinc chromate
17	Brake	Aluminum casting		44	Thrust washer	Steel	
18	Bush B	Oil impregnated bearing alloy		45	Metal gasket	Fluoro rubber	
19	Piston rod	Steel	Industrial chrome plating	46	Rod bushing	Steel	
20	Hexagon socket head cap bolt	Alloy steel	Blackening	47	Piston gasket	Fluoro rubber	
21	Piston for brake	Cast iron		48	Spring washer	Steel	
22	Bearing pin	Steel		49	Main body cap	Cast iron	
23	Bearing	-		50	O ring	Fluoro rubber	
24	Washer assembly cross headed pan	Steel		51	E type snap ring	Steel	
25	Spring	Piano wire	Blackening	52	Hexagon nut	Steel	Zinc chromate
				53	Cushion needle	Steel	Zinc chromate
				54	Needle nut	Steel	Zinc chromate
				55	Needle gasket	Fluoro rubber	
				56	Plain washer	Steel	Zinc chromate

Repair parts list

● JSC3-T

Bore size (mm)	Kit No.	Repair parts number
ϕ 125	JSC3-T-125K	
ϕ 140	JSC3-T-140K	4 8 9 11 12
ϕ 160	JSC3-T-160K	36 45 55
ϕ 180	JSC3-T-180K	

Dimensions



- Dimensions of ϕ 40 to ϕ 100 cylinder are the same as JSC3 (double acting single rod). Refer to pages 1308 to 1317.
- Dimensions of ϕ 125 to ϕ 180 cylinder are the same as JSC3-N (double acting oil-less type). Refer to pages 1318 to 1325.

Brake cylinder (medium and large bore size)
With brake

JSC3 Series common accessory dimensions (rod eye, clevis, No. 2 bracket) ϕ 40 to ϕ 100

- Installation dimensions of clevis type, knuckle, and No.2 bracket (CD, CW, CQ) are same. All combinations are possible.
- Specify the model no. when placing an order.

● Rod eye/clevis dimensions

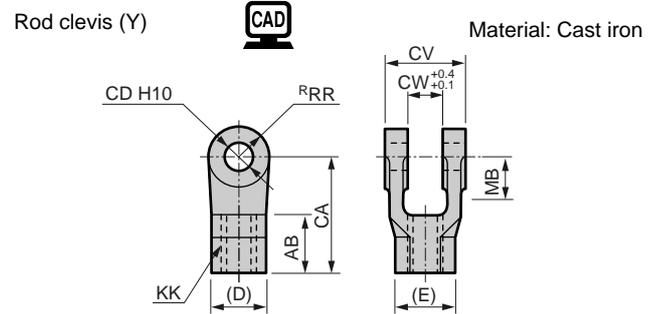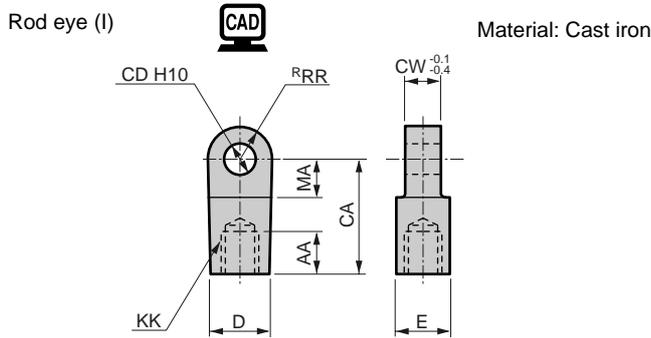



● Note: A pin and a snap ring are attached.

Model no.	Applicable bore size (mm)	AA	CA	CD	CW	D	E	KK	MA	RR	Weight (kg)
S1-I-40	40	20	50	12 ^{+0.070} ₀	18	27	27	M14 x 1.5	21	16	0.26
S1-I-50	50	21	50	12 ^{+0.070} ₀	18	27	27	M18 x 1.5	21	16	0.24
S1-I-63	63	21	50	14 ^{+0.070} ₀	20	27	27	M18 x 1.5	21	16	0.25
S1-I-80	80	30	70	20 ^{+0.084} ₀	28	46	41	M22 x 1.5	30	25	0.80
S1-I-100	100	30	70	20 ^{+0.084} ₀	28	46	41	M26 x 1.5	30	25	0.84

Model no.	Applicable bore size (mm)	AB	CA	CD	CV	CW	D	E	KK	MB	RR	Weight (kg)
S1-Y-40	40	24	50	12 ^{+0.070} ₀	36	18	27	31.2	M14 x 1.5	19	16	0.25
S1-Y-50	50	24	50	12 ^{+0.070} ₀	36	18	27	31.2	M18 x 1.5	19	16	0.24
S1-Y-63	63	24	50	14 ^{+0.070} ₀	40	20	27	31.2	M18 x 1.5	19	16	0.26
S1-Y-80	80	35	70	20 ^{+0.084} ₀	56	28	41	47.3	M22 x 1.5	30	25	0.90
S1-Y-100	100	35	70	20 ^{+0.084} ₀	56	28	41	47.3	M26 x 1.5	30	25	0.85

Note: The MB dimensions indicate the effective length of the CW dimensions.

● No. 2 bracket dimensions

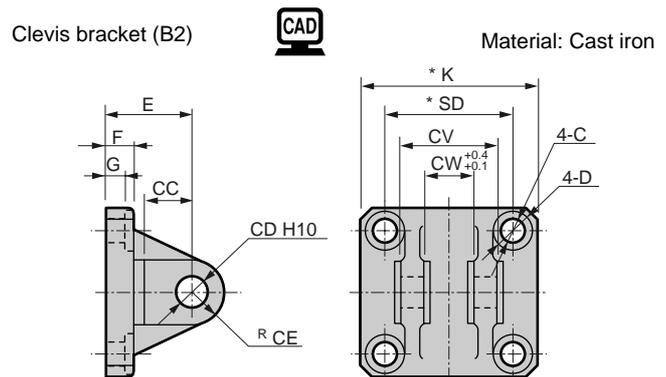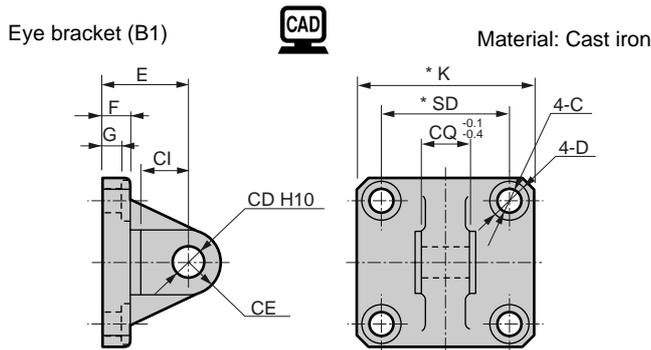


● Note: A pin and a snap ring are attached.

Model no.	Applicable bore size (mm)	C	CD	CE	CI	CQ	D	E	F	G	K	SD	Weight (kg)
S1-B1-40	40	9	12 ^{+0.070} ₀	12	18	18	14	32	10	6.5	57	40.5	0.32
S1-B1-50	50	9	12 ^{+0.070} ₀	12	18	18	14	32	10	6.5	66	48	0.38
S1-B1-63	63	9	14 ^{+0.070} ₀	16	24	20	14	37	10	7.5	80	59	0.57
S1-B1-80	80	14	20 ^{+0.084} ₀	20	30	28	20	52	14	10.5	98	74	1.27
S1-B1-100	100	14	20 ^{+0.084} ₀	20	30	28	20	52	16	10.5	118	90	1.64

Model no.	Applicable bore size (mm)	C	CD	CE	CI	CV	CW	D	E	F	G	K	SD	Weight (kg)
S1-B2-40	40	9	12 ^{+0.070} ₀	12	18	36	18	14	32	10	6.5	57	40.5	0.36
S1-B2-50	50	9	12 ^{+0.070} ₀	12	18	36	18	14	32	10	6.5	66	48	0.41
S1-B2-63	63	9	14 ^{+0.070} ₀	16	24	40	20	14	37	10	7.5	80	59	0.62
S1-B2-80	80	14	20 ^{+0.084} ₀	20	30	56	28	20	52	14	10.5	98	74	1.48
S1-B2-100	100	14	20 ^{+0.084} ₀	20	30	56	28	20	52	16	10.5	118	90	1.82

Eye bracket (B3) Material: Cast iron

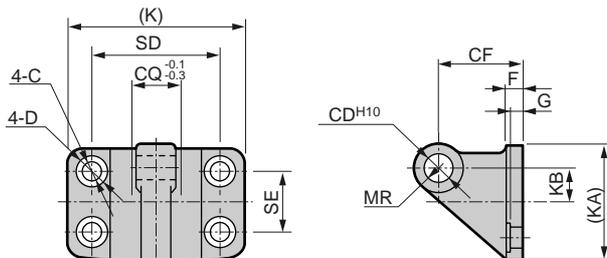

Model no.	Applicable bore size (mm)	C	CD	CF	CQ	D	F	G	K	KA	KB	MR	SD	SE	Weight (kg)
S1-B3-40	ϕ 40, ϕ 50	9	12	40	18	14	8	6.5	85	57	17.5	12	65	35	0.44
S1-B3-63	ϕ 63	11	14	50	20	17	10	8	105	67	20	16	80	40	0.77
S1-B3-80	ϕ 80, ϕ 100	14	20	65	28	20	12	10	130	93	30	20	100	60	1.64

- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size)
With brake

JSC3 Series common accessory dimensions (No. 2 bracket, pin, bellows, indicator) ϕ 40 to ϕ 100


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

● Trunnion type No. 2 bracket dimensions


Material: Cast iron

● Pin dimensions

Material: Carbon steel

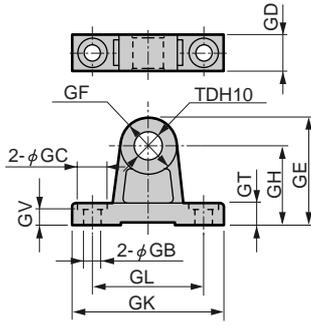

Pin (P)

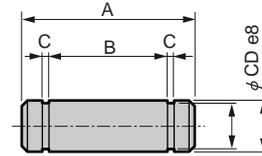

Symbol Model no.	GB	GC	GD	GE	GF	GH	GK	GL	GT	GV	TD	Weight (kg)
S1-B4-40	9	17	19	61	32	45	80	60	12	11	16 ^{+0.070} ₀	0.25
S1-B4-50	9	17	19	63	36	45	85	65	12	11	18 ^{+0.070} ₀	0.28
S1-B4-63	11	22	24	80	40	60	100	75	14	13	20 ^{+0.084} ₀	0.52
S1-B4-80	14	24	26	85	50	60	115	85	14	13	25 ^{+0.084} ₀	0.70
S1-B4-100	14	24	35	107	64	75	130	100	17	16	35 ^{+0.100} ₀	1.48

Model no.	Applicable bore size (mm)	A	B	C	D	CD	Snap ring	Weight (kg)
S1-P-40	40,50	43.5	36.2	1.15	11.5	12 ^{-0.032} _{-0.059}	Axis C type 12	0.04
S1-P-63	63	47.5	40.2	1.15	13.4	14 ^{-0.032} _{-0.059}	Axis C type 14	0.06
S1-P-80	80,100	64	56.2	1.35	19	20 ^{-0.040} _{-0.073}	Axis C type 20	0.16



Note: A pin and a snap ring for clevis bracket, rod clevis, clevis bracket types are attached.

● Bellows



ϕ 40 to ϕ 100


Rod end flange (FA)

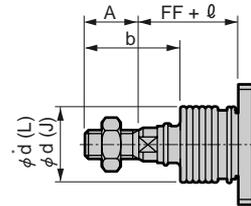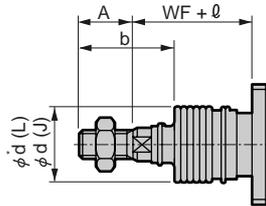

Note: l dimensions below decimal point are rounded up.

Symbol Bore size (mm)	A	WF	FF	b	d	d*	l							
							50 or less	51 to 100	101 to 150	151 to 200	201 to 300	301 to 400	401 to 500	501 and over
ϕ 40	22	30	22	41	40	40	25.5	41.5	58.5	75.5	108.5	141.5	174.5	(Stroke length/3.0) + 8
ϕ 50	28	34	27	47	47	48	22	36	49	63	90	119	146	(Stroke length/3.6) + 7.5
ϕ 63	28	30	22	45	47	48	22	36	49	63	90	119	146	(Stroke length/3.6) + 7.5
ϕ 80	36	43.5	30.5	58.5	53	55	14	26	38	49	72	96	119	(Stroke length/4.3) + 2.5
ϕ 100	45	48	35.5	69.5	61	65	20	32	42	53	76	98	120	(Stroke length/4.5) + 9

● Indicator

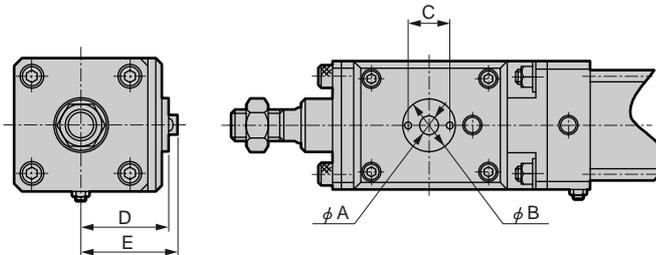

Symbol Bore size (mm)	A	B	C	D	E
ϕ 40	8	25	18	51	51 to 59
ϕ 50	8	25	18	55.5	55.5 to 63.5
ϕ 63	10	32	24	59	59 to 68
ϕ 80	12	32	24	69	69 to 80
ϕ 100	14	32	24	78	78 to 90


● The brake operation status can be visually judged from outside.



JSC3 Series common accessory dimensions (rod eye, clevis, bracket, pin) ϕ 125 to ϕ 180

● Rod eye for JSC3 (I)

Material: Steel

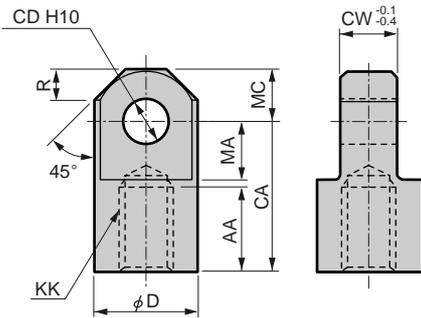


Model no.	Applicable bore size (mm)	AA	CA	CD	CW	D	KK	MA	MC	R	Weight (kg)
SCS-125-I	ϕ 125	50	85	25	32	55	M30 X 1.5	32	27.5	15.5	1.25
SCS-140-I	ϕ 140	50	90	28	36	60	M30 X 1.5	35	30	18	1.65
SCS-160-I	ϕ 160	60	105	32	40	70	M36 X 1.5	40	35	21	2.55
SCS-180-I	ϕ 180	65	115	40	50	85	M40 X 1.5	47.5	42.5	29	4.20

● Rod clevis for JSC3 (Y)

Material: Cast iron


● Note: A pin and a snap ring are attached.

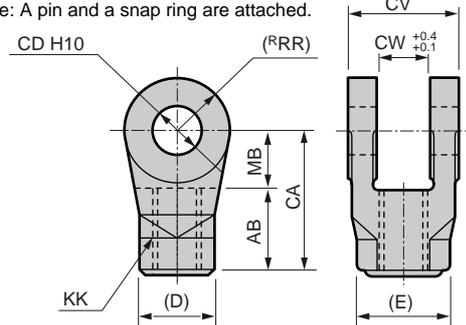

Model no.	Applicable bore size (mm)	AB	CA	CD	CV	CW	D	E	KK	MB	RR	Weight (kg)
SCS-125-Y	ϕ 125	50	85	25	64	32	46	53.1	M30 X 1.5	35	27.5	1.30
SCS-140-Y	ϕ 140	50	90	28	72	36	46	53.1	M30 X 1.5	40	30	1.65
SCS-160-Y	ϕ 160	60	105	32	80	40	55	63.5	M36 X 1.5	45	35	2.55
SCS-180-Y	ϕ 180	65	115	40	100	50	60	69.3	M40 X 1.5	50	42.5	4.40

● Eye bracket for JSC3 (B1)


Material: Cast iron

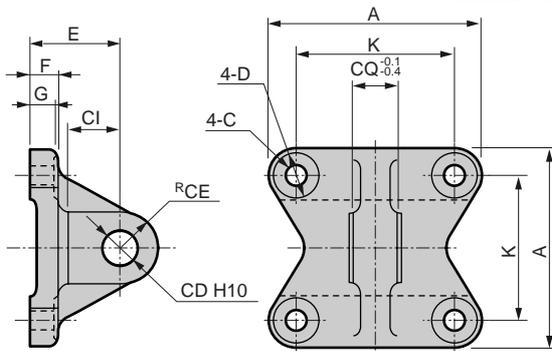

Symbol	A	C	CD	CE	CI	CQ	D	E	F	G	K	Weight (kg)
SCS-125-B1	140	16	25	25	35	32	23	63	20	18	110	2.35
SCS-140-B1	154	16	28	28	40	36	23	75	22	20	124	3.30
SCS-160-B1	174	18	32	32	40	40	26	75	24	22	142	4.65
SCS-180-B1	196	20	40	40	55	50	29	90	25	23	160	6.75

● Pin (P)

Material: Carbon steel




Symbol	A	B	C	CD	D	Applicable snap ring	Weight (kg)	Applicable model
SCS-125-P	75	66.3	1.35	25	23.9	Axis C type 25	0.25	JSC-125
SCS-140-P	84	74.7	1.65	28	26.6	Axis C type 28	0.40	JSC-140
SCS-160-P	92	82.7	1.65	32	30.3	Axis C type 32	0.50	JSC-160
SCS-180-P	115	103.2	1.9	40	38	Axis C type 40	1.15	JSC-180

Note: A pin and a snap ring are attached for clevis, clevis bracket and rod clevis.

● Clevis bracket for JSC3 (B2)


Material: Cast iron

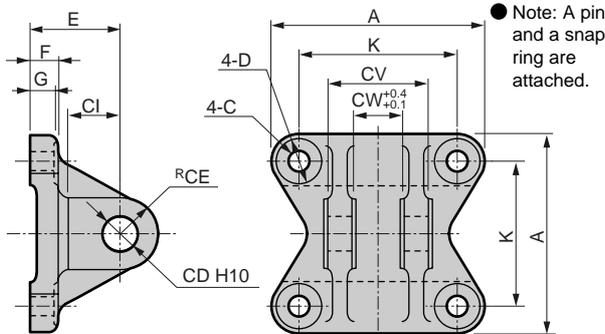

● Note: A pin and a snap ring are attached.

Symbol	A	C	CD	CE	CI	CV	CW	D	E	F	G	K	Weight (kg)
SCS-125-B2	140	16	25	25	35	64	32	23	63	20	18	110	2.65
SCS-140-B2	154	16	28	28	40	72	36	23	75	22	20	124	3.85
SCS-160-B2	174	18	32	32	40	80	40	26	75	24	22	142	5.45
SCS-180-B2	196	20	40	40	55	100	50	29	90	25	23	160	8.70

● Bellows dimension



Symbol	A	WF	b	d	ℓ
Bore size (mm)					
ϕ 125	50	55	74	75	(Stroke length/4.55) + 11
ϕ 140	50	57	74	75	(Stroke length/4.55) + 9
ϕ 160	56	71.5	82	80	(Stroke length/5.15) + 9
ϕ 180	63	78.5	91	90	(Stroke length/5.15) + 9


- SCP*2
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS
- CKV2
- CA/OV2
- SSD
- CAT
- MDC2
- MVC
- SMD2
- MSD*
- FC*
- STK
- ULK*
- JSK/M2
- JSG
- JSC3**
- USSD
- USC
- JSB3
- LMB
- STG
- STS/L
- LCS
- LCG
- LCM
- LCT
- LCY
- STR2
- UCA2
- HCM
- HCA
- SRL2
- SRG
- SRM
- SRT
- MRL2
- MRG2
- SM-25
- CAC3
- UCAC
- RCC2
- MFC
- SHC
- GLC
- Ending

Brake cylinder (medium and large bore size) With brake

JSM2/JSK2/JSC3 Series

Technical data

Stoppage accuracy and overrun

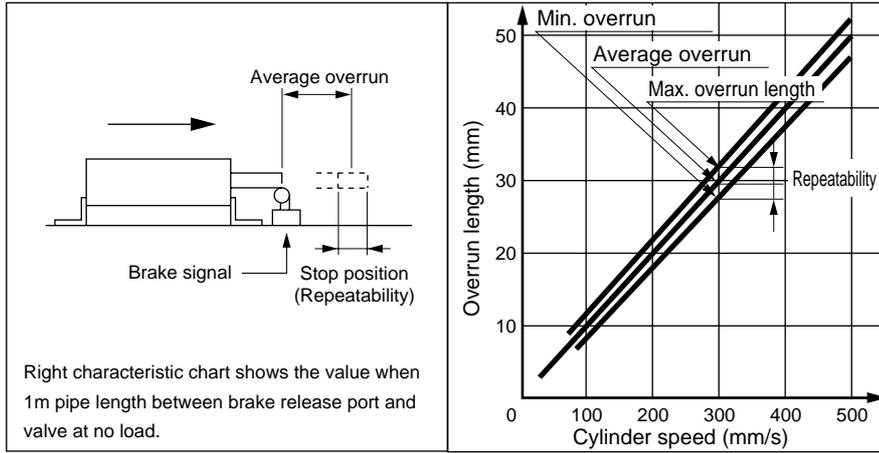

*Related products selection guide

Overrun length and stoppage accuracy differ depending on the used valve. Use the following related products.

Model	Related components	SOL-1	SOL-2	Reverse regulator	Speed control valve	Silencer	Piping
	Bore size (mm)						
JSM2 JSK2	$\phi 20$	4KB150-06	B5136	R1100-6 2419-1C	SC3W-6-6 SC3R-6 SC1-6	SLW-6A	$\phi 6 \times \phi 4$ Nylon tube
JSK2	$\phi 25$	4KB150-06	B5136	R1100-6 2419-1C	SC3W-6-6 SC3R-6 SC1-6	SLW-6A	$\phi 6 \times \phi 4$ Nylon tube
JSM2	$\phi 30$	4KB150-06 4KA250-06 4KB250-06	B5136	R1100-6 2419-1C	SC3W-6-6 SC3R-3-6 SC1-6	SLW-6A	$\phi 6 \times \phi 4$ Nylon tube
JSK2	$\phi 32$	4KB150-06 4KA250-06 4KB250-06	B5136	R1100-6 2419-1C	SC3W-6-6 SC3R-3-6 SC1-6	SLW-6A	$\phi 6 \times \phi 4$ Nylon tube
JSM2 JSK2	$\phi 40$	4KA250-06 4KB250-06	4KA110-06 4KB110-06	R1100-6 2419-1C	SC3W-6-8 SC3R-6 SC1-6	SLW-6A	$\phi 8 \times \phi 5.7$ Nylon tube
JSC3	$\phi 40$	4KB250-08 4KB350-08 PV5-6-FIG-K-A02	4KA210-06 4KB210-06	R3100-8 2400-2C	SC3W-8-8 SC3R-8 SC1-8	SLW-8A	$\phi 8 \times \phi 5.7$ Nylon tube
	$\phi 50$	4KB350-08 4F350-10 4F450-10 PV5-6-FIG-D-A03	4KA210-06 4KB210-08	R3100-10 2400-3C	SC3W-10-10 SC3R-10 SC1-10	SLW-10A	$\phi 10 \times \phi 7.2$ Nylon tube
	$\phi 63$	4KB350-08 4F350-10 4F3450-10 PV5-6-FIG-D-A03	4KA210-06 4KB210-08	R4100-10 2401-3C	SC3W-10 SC3R-10 SC1-10	SLW-10A	$\phi 10 \times \phi 7.2$ Nylon tube
	$\phi 80$	4KB450-15 4F550-15 PV5-8-FIG-D-A04	4KA210-06 4KB210-08	R4100-15 2401-4C	SC3W-15-12 SC3R-15 SC1-15	SLW-15A	$\phi 12 \times \phi 8.9$ Nylon tube
	$\phi 100$	4KB450-15 4F550-15 PV5-8-FIG-K-A04	4KB310-10	R4100-15 2401-4C	SC3W-15-12 SC3R-15 SC1-15	SLW-15A	$\phi 12 \times \phi 8.9$ Nylon tube
	$\phi 125$	4KB450-15 4F550-15 4F650-15 PV5-8-FIG-K-A04	4KB310-10 4F310-10	R4100-15 2401-4C	SC3R-15 SC1-15	SLW-15A	$\phi 12$ Rubber hose SGP3/8B SGP1/2B
	$\phi 140$	4F650-20	4KB310-10 4F310-10	2401-6C	SC-20A	SL-20A	$\phi 19$ Rubber hose SGP1/2B SGP3/4B
	$\phi 160$	4F650-20 4F750-20	4KB310-10 4F310-10	2401-6C	SC-20A	SL-20A	$\phi 19$ Rubber hose SGP1/2B SGP3/4B
	$\phi 180$	4F750-20	4KA410-10 4KB410-15 4F310-10	2401-6C	SC-20A	SL-20A	$\phi 19$ Rubber hose SGP1/2B SGP3/4B

● Note 1: For JSC3-V, the solenoid valve for brake release (SOL2) is integrated.

Applications

This product can be used with devices and equipment requiring the following functions:

1 When multipoint positioning is required (transfer/positioning)

Equipment can be accurately stopped at several positions.

2 When position locking is required

Brakes can be applied and held instantly when the air pressure source or power is turned OFF during power failure or accident, preventing damage to equipment and ensuring safety.

3 When emergency stop is required

The cylinder can be stopped with electric signals, etc., when personnel, etc., enter hazardous areas.

4 Workpiece lock


When the workpiece is locked to the jig or mounting bracket, etc., it can be locked even without air pressure source or power. The workpiece can be transferred while locked to the jig.

SCP*2
CMK2
CMA2
SCM
SCG
SCA2
SCS
CKV2
CA/OV2
SSD
CAT
MDC2
MVC
SMD2
MSD*
FC*
STK
ULK*
JSK/M2
JSG
JSC3
USSD
USC
JSB3
LMB
STG
STS/L
LCS
LCG
LCM
LCT
LCY
STR2
UCA2
HCM
HCA
SRL2
SRG
SRM
SRT
MRL2
MRG2
SM-25
CAC3
UCAC
RCC2
MFC
SHC
GLC

Applications


1 Linear multipoint welding

When welding steel plates, etc., linearly at several points, this cylinder can be used to move and position the slide table or welding gun.

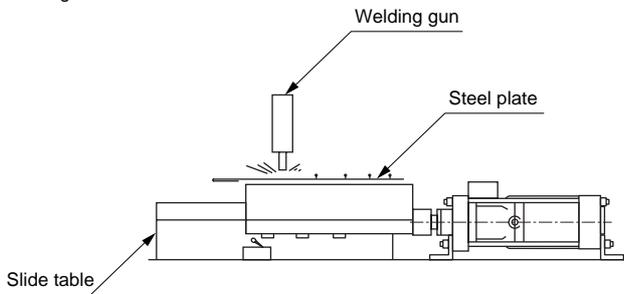


4 Moving to conveyer

Move products to the conveyer one at a time.

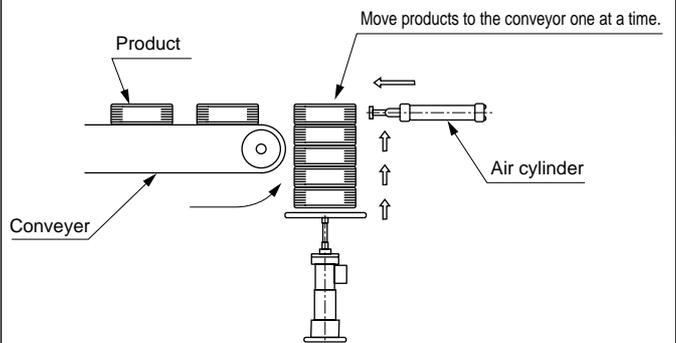


2 Position locking

If there is a vertical load that could drop of its own weight when the pressure source is turned off, brakes are applied to the lock position.

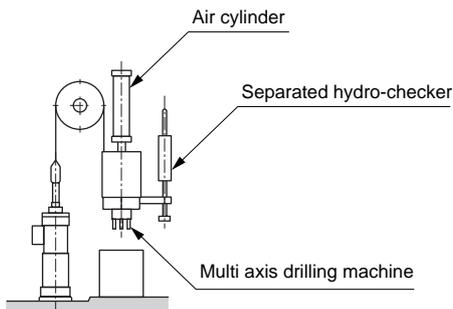


5 When several cylinders with different strokes are required

When different-sized products flow to the conveyer, etc., and many cylinders are set, the stroke must be changed. Using the middle bore size brake cylinder, a cylinder compatible with different strokes is created electrically.

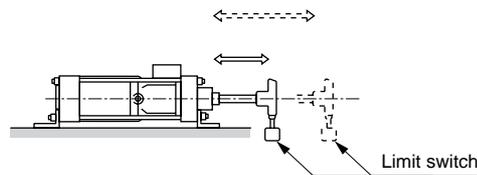


3 Workpiece lock

When the workpiece is locked to the jig, etc., it can be locked even when air pressure source or power is OFF by using the brake cylinder.

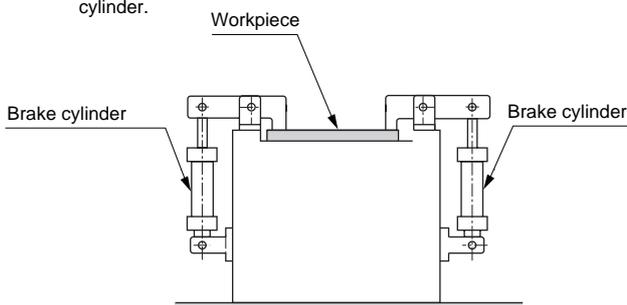

6 Opening and closing of hopper

When a hopper must be closed at a specific weight, such as when manufacturing powder, the hopper is not completely closed to accurately measure powder, then it is fully closed.

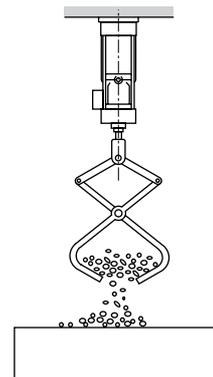

Ending

Brake cylinder (medium and large bore size) With brake