

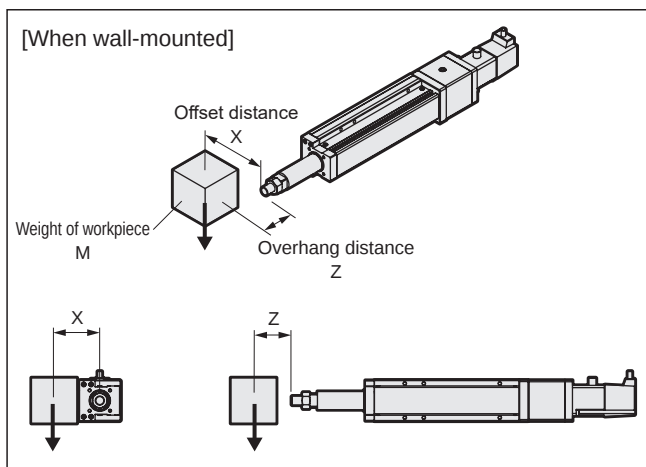


Allowable load weight


[When installed horizontally or wall-mounted]

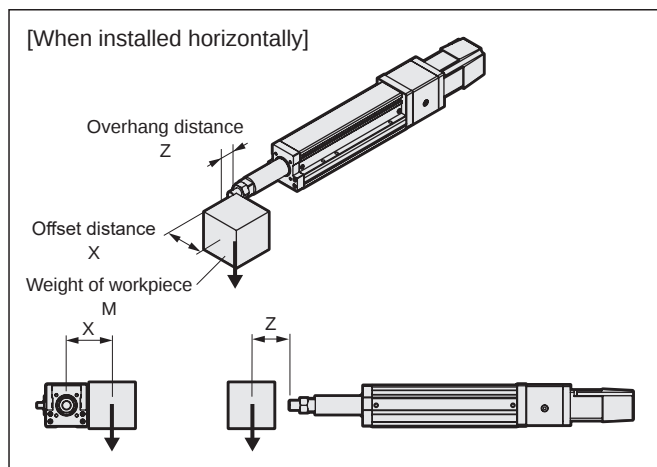


[Offset (X) 0 / Overhang distance (Z) 0 mm]

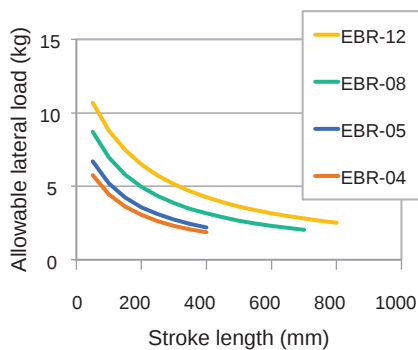


[Offset (X) 0 / Overhang distance (Z) 50 mm]

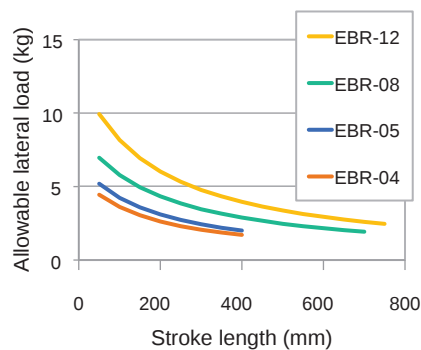


[Offset (X) 0 / Overhang distance (Z) 100 mm]

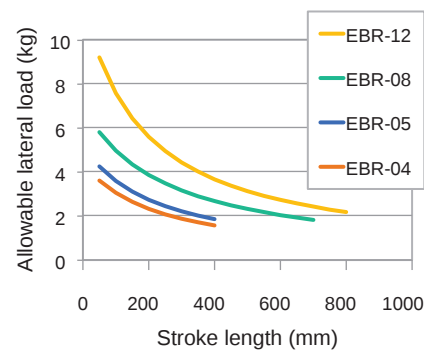


[Offset (X) 100 mm / Overhang distance (Z) 0 mm]

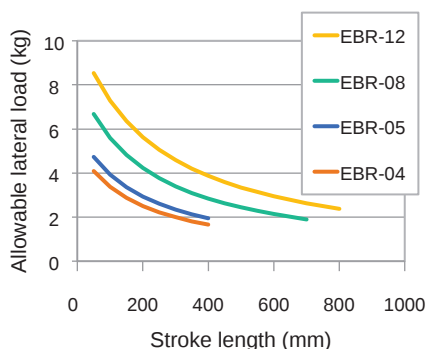

[Offset (X) 100 mm / Overhang distance (Z) 50 mm]

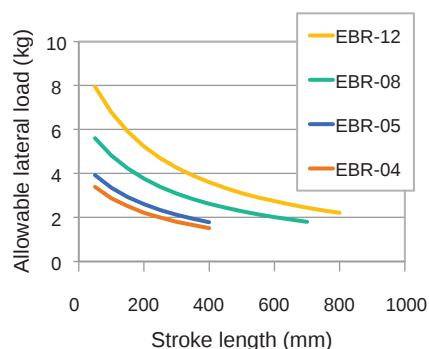






[Offset (X) 100 mm / Overhang distance (Z) 100 mm]

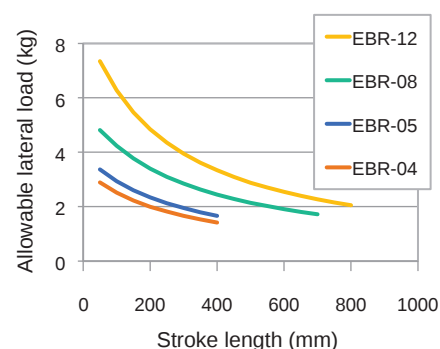

* Values are when the actuator operating life is 5,000km. (Acceleration/deceleration 0.5G, speed 300mm/s)
Screw lead: 2 mm is the value when the travel life is 1,000km.




Allowable load weight

[When installed vertically]

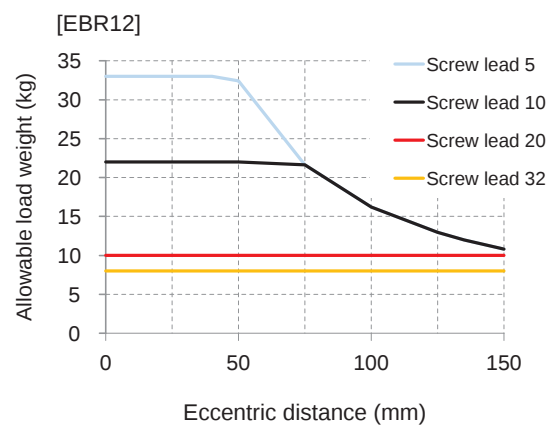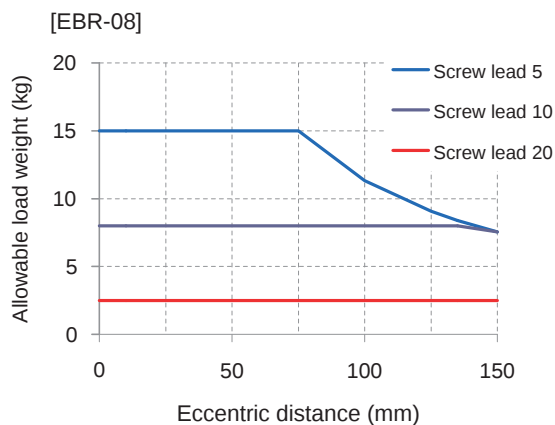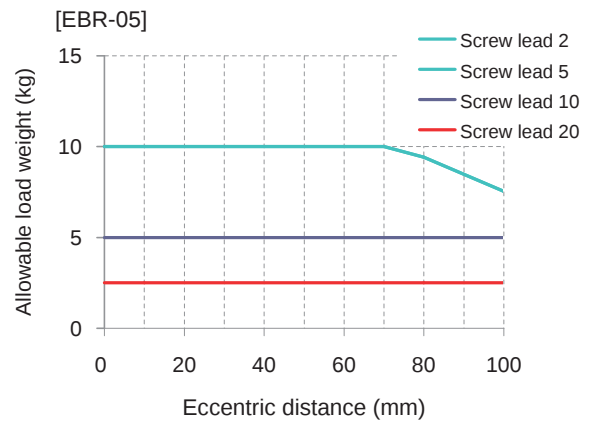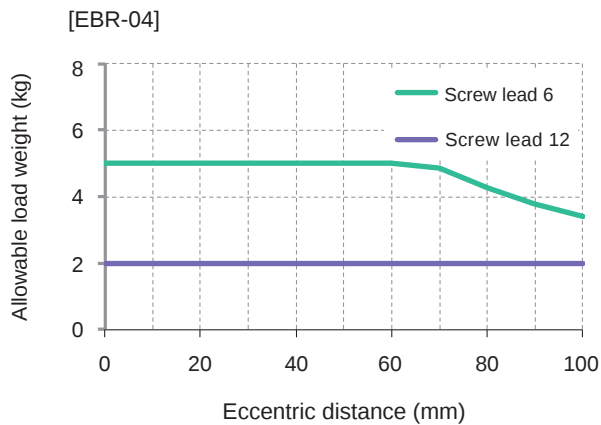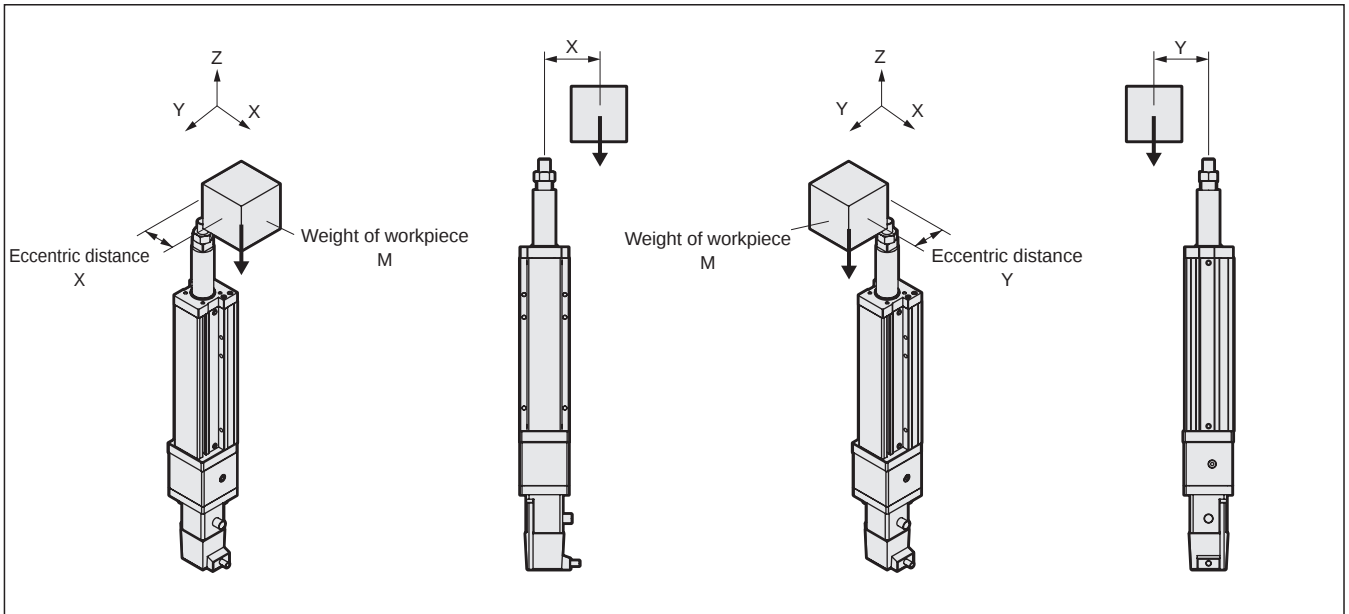

* Values are when the actuator operating life is 5,000km. (Acceleration/deceleration 0.5G, speed 300mm/s)
Screw lead: 2 mm is the value when the travel life is 1,000km.

Rod end runout (EBR Series) *Reference value

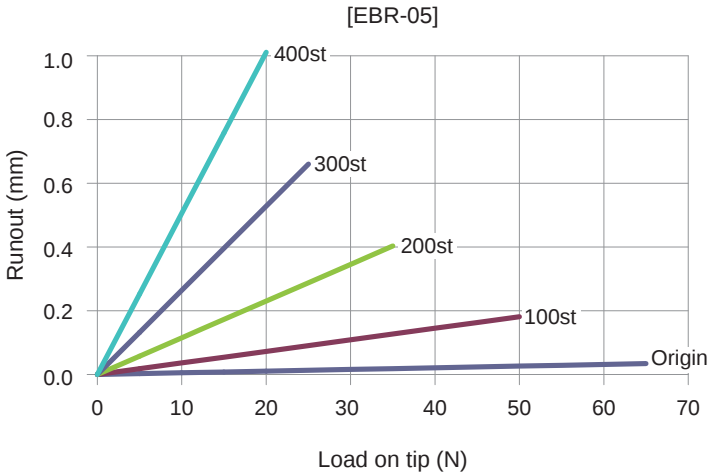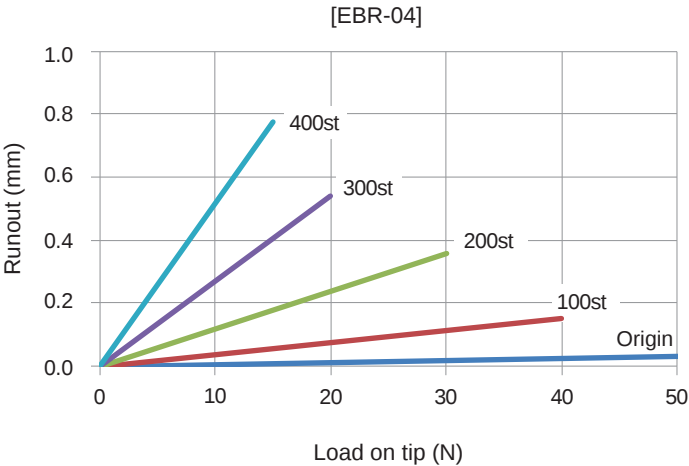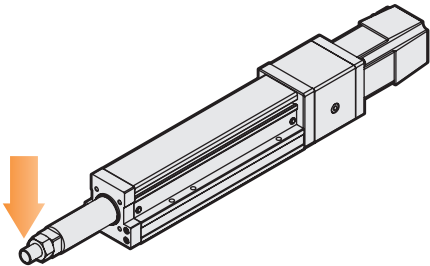

Rod end runout (EBR Series) *Reference value

Servo motor compatible							Stepper motor compatible				Safety precautions	
EBS	EBR	ETS	ETS Multi-Axis	ECS	ETV	ECV						EKS
							EBS	EBR	ETS	ECS		

