

INSTRUCTION MANUAL

FR UNIT

A7019

- Please read this instruction manual carefully before using this product, particularly the section describing safety.
- Retain this instruction manual with the Product for further consultation whenever necessary.

For Safety Use

To use this product safely, basic knowledge of pneumatic equipment, including materials, piping, electrical system and mechanism, is required (to the level pursuant to JIS B 8370 Pneumatic System Rules).

We do not bear any responsibility for accidents caused by any person without such knowledge or arising from improper operation.

Our customers use this product for a very wide range of applications, and we cannot keep track of all of them. Depending on operating conditions, the product may fail to operate to maximum performance, or cause an accident. Thus, before placing an order, examine whether the product meets your application, requirements, and how to use it.

This product incorporates many functions and mechanisms to ensure safety. However, improper operation could result in an accident. To prevent such accidents, read this operation manual carefully for proper operation.

Observe the cautions on handling described in this manual, as well as the following instructions:



Precautions

- The snap drain use a plastic bowl. Do not use them with an organic solvent. The bowl will be damaged. With an organic solvent, use a snap drain containing a metal bowl.

INDEX

A7019

FR UNIT

Manual No. SM-272987-A

- 1. Cautions for mounting
 - 1. 1 The attention item in case of installation 1
- 2. Cautions for operation
 - 2. 1 Cautions for handling of adjusting knob 3
- 3. Cautions for maintenance
 - 2. 1 The attention item in case of maintenance 4



1. 1 Cautions for mounting

- 1) Do plumbing for the flow of air to enter from IN.
- 2) Install it to have a bowl located downward of line.
- 3) The connection caliber use the one which is the same as the plumbing diameter as much as possible.
- 4) Install it as close by the pneumatic equipment as possible.
- 5) In case of resolution clean, open the bottom of the bowl beforehand by equal to or more than 40mm that it is possible to remove a bowl.
- 6) Install pressure gage on the side observable it with ease and use a plug to block the opening on the other side.
- 7) Keep working air pressure no higher than 1.0MPa.

When turning adjusting knob to the right, the secondary lateral pressure power becomes high and becomes low when turning to the left.

- 8) Avoid its installation where ambient temperature exceeds 65°C.
- 9) If the bowl is made of transparent resin (polycarbonate or nylon), never use the product in an atmosphere containing an organic chemical or in an environment where an organic chemical may come into contact with the bowl.



WARNING

Do not use this product in an atmosphere containing organic or other chemicals or where chemicals may adhere to the product. Failure to follow this instruction may result in breakage of the bowl.



Caution Chemical Resistance for Transparent Resin Bowl

Use a metal bowl in the atmosphere where chemicals described below are present.

Some inspection fluid, sealant or adhesive may include the following chemicals. Please make sure that any such chemicals are not included before using.


Types of chemicals	Classification of chemicals	Major chemical products	General example	Polycarbonate	Nylon
Inorganic product	Acid	Hydrochloric acid, sulfuric acid, hydrofluoric acid, phosphoric acid, chromic acid, etc.	Pickling fluid for metal, acidic degreasing fluid, film treatment fluid, etc.	×	×
	Alkali	Alkali materials such as caustic soda, caustic potash, slaked lime, aqueous ammonia, sodium carbonate	Alkaline degreasing fluid for metal, water-soluble machining oil, leakage detecting agent	×	○
	Inorganic salt	Sodium sulfide, potassium nitrate, potassium dichromate, sodium sulfate, etc.	Plating	×	○
Organic chemical	Aromatic hydrocarbon	Benzene, toluene, xylene, ethylbenzene, styrene, etc.	Included in paint thinner (benzene, toluene, xylene)	×	×
	Chlorinated aliphatic hydrocarbon	Methyl chloride, ethylene chloride, methylene chloride, acetylene chloride, chloroform, trichlene, berklene, carbon tetrachloride	Organic solvent cleaning fluid for metal (trichlene, berklene, carbon tetrachloride, etc.)	×	○
	Chlorinated aromatic hydrocarbon	Chlorobenzene, dichloro-benzene, hexachloro-ethane (B-H-C), etc.	Agricultural chemical	×	○
	Petroleum composition	Solvent naphtha, gasoline, kerosene	Degreasing for metal	×	○
	Alcohol	Methyl alcohol, ethyl alcohol, cyclohexanol, benzyl alcohol	Used in anti-freeze Leakage detecting agent	×	×
	Phenol	Carbolic acid, cresol, naphthol, etc.	Material for disinfection liquid or phenol resin	×	×
	Ether	Methyl ether, methyl ethyl ether, ethyl ether	Additive for brake fluid	×	○
	Ketone	Acetone, methyl ethyl ketone, cyclohexanone, acetophenone, etc.		×	×
	Carboxylic acid	Formic acid, acetic acid, butyl acid, acrylic acid, oxalic acid, phthalic acid, etc.	Dye and oxalic acid are used for aluminum treatment agent. Phthalic acid is used for paint-based material. Leakage detecting agent.	×	×
	Ester	Dimethyl phthalate (DMP), diethyl phthalate (DEP), dibutyl phthalate (DBP), dioctyl phthalate (DOP)	Additive for lubrication oil, synthetic hydraulic oil, rust preventive oil. Plasticizer for synthetic resin.	×	○
	Hydroxy acid	Glycol acid, lactic acid, malic acid, citric acid, tartaric acid	Additive for food	×	×
	Nitro compound	Nitro methane, nitro ethane, nitro ethylene, nitro benzene		×	○
	Amine	Methyl-amine, dimethyl-amine, ethyl-amine, aniline, acetanilide, etc.	Additives for brake fluid, anti-static agent, dye for plastics	×	×
	Nitrile	Acetonitrile, acrylonitrile, benznitrile, acetisonitrile, etc.	Raw material for nitrile rubber	×	○

Polycarbonate bowl : Transparent without color

Nylon bowl : Transparent and green in color

2 OPERATION

2. Cautions for handling of adjusting knob

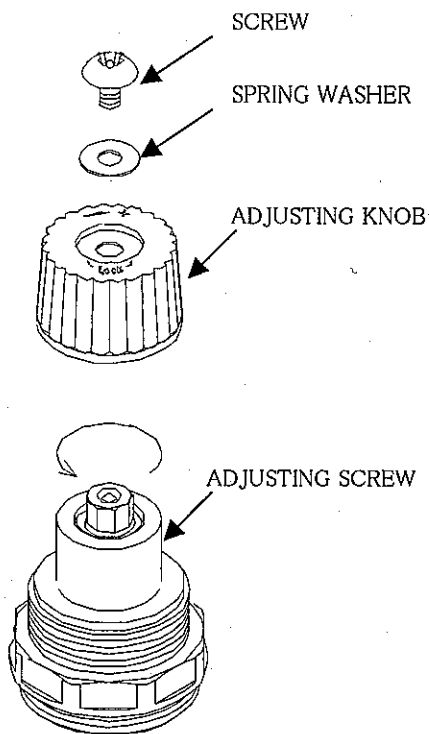

- (1) The screw has been tightened temporarily during assembly.

After the pressure has been adjusted correctly, tighten the screw firmly to eliminate the pressure variation due to vibration.

If the pressure adjustment is required frequently, tighten the screw so that the adjusting knob is turned lightly.


- (2) If the adjusting knob is turned fully counterclockwise

, it may be locked. Therefore, when adjusting the pressure to "0", do not turn the adjusting knob until it becomes hard to turn.

If the adjusting knob is locked, follow the steps below.

- a) Remove the screw to detach the adjusting knob.
- b) Turn the adjusting screw counterclockwise with a wrench to unlock it.

3. Cautions for maintenance

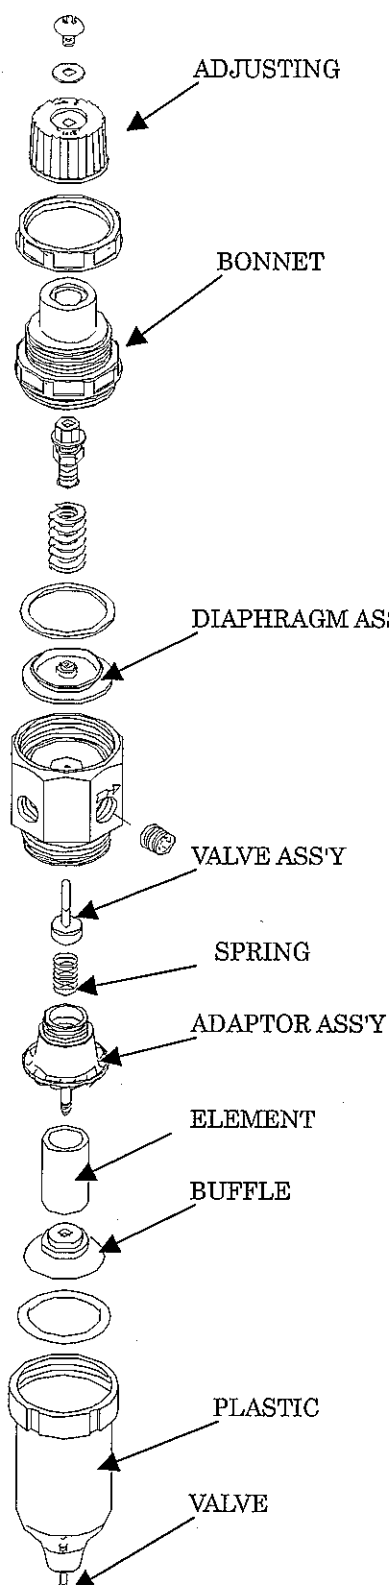

- (1) Discharge the drain from the bowl before it reaches the baffle. Push the valve on the bottom of the bowl upward to discharge the drain.
- (2) When cleaning the element, wash the element using lukewarm water after it has been cleaned using kerosene. After cleaning the element, blow the air to remove water contents from the inside of the element.
- (3) When cleaning the plastic bowl, clean it using neutral detergent for household use. Never use other detergents.
- (4) Follow the steps below to disassemble the product.
 - a) Stop the air supply.
 - b) Turn the adjusting knob fully counterclockwise to loosen it completely.
 - c) Loosen the bonnet using a wrench to remove it.
 - d) Remove the diaphragm assembly.
 - e) Loosen the plastic bowl to remove it.
 - f) Pull the baffle downward to disassemble the element
 - g) Loosen the adaptor assembly to remove the spring and valve assembly.
- (4) If the pressure cannot be adjusted or the pressure level drops significantly, follow the steps below to perform the inspection.
 - a) Disassemble the plastic bowl, baffle, and element.
 - b) Loosen the adaptor assembly to remove the spring and valve assembly.
 - c) Clean the valve assembly and check for damage or scratch.
- (6) If a large amount of air leaks from the relief port, check the following.
 - a) If this occurs, check the rubber part of the diaphragm assembly and valve assembly for damage or dust sticking.