

Excellent mounting on 5 surfaces.


Compact/square shape cylinder, compact cylinder (ø6 to ø25) which allows direct mounting from any of five surfaces.

Lightweight and space saving

Space saving and lightweight with integration of mount block.

Up to
33%
Less weight
(Compared with conventional models)


Up to
23%
Space saving
(Compared with conventional models)

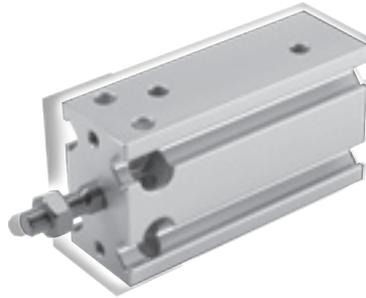

Simple shape for flexible mounting

Integration of the mount block allows you to choose any of the five surfaces for direct mounting.


Direct
mounting on
any of the five
surfaces

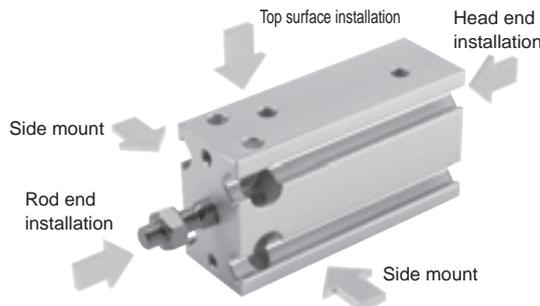

A detection switch fits in completely

A detection switch fits almost flush into the body.

Flat and hardly
protruding from
the surface

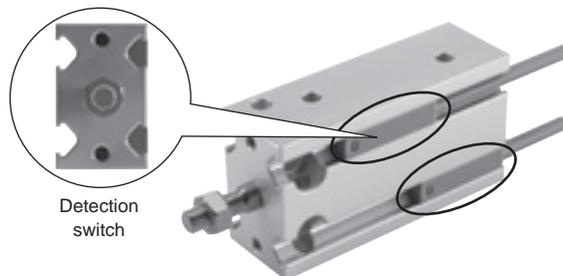

SCPD3
SCM
SSD2
MDC2
SMG
LCM
LCR
LCG
LCX
STM
STG
STR2
MRL2
GRC
Cylinder Switch
MN3E MN4E
4GA/B
M4GA/B
MN4GA/B
F.R. (module unit)
Clean F.R
Precision R
Press gauge Diff. press gauge
Electro-pneumatic R
Speed controller
Auxiliary valve
Fitting/tube
Clean air unit
Pressure sensor
Flow rate sensor
Valve for air blow
Ending