


Compact/high-precision actuator.

- LCM
- LCR
- LCG
- LCW
- LCX
- STM
- STG
- STS/STL
- STR2
- UCA2
- ULK*
- JSK/M2
- JSG
- JSC3/JSC4
- USSD
- UFCD
- USC
- UB
- JSB3
- LMB
- LML
- HCM
- HCA
- LBC
- CAC4
- UCAC2
- CAC-N
- UCAC-N
- RCS2
- RCC2
- PCC
- SHC
- MCP
- GLC
- MFC
- BBS
- RRC
- GRC
- RV3*
- NHS
- HRL
- LN
- Hand
- Chuk
- MecHnd/Chuk
- ShkAbs
- FJ
- FK
- SpdContr
- Ending

Ultra-compact, high-precision, rigid linear slide cylinder LCM Series.
($\phi 4.5/\phi 6/\phi 8$)

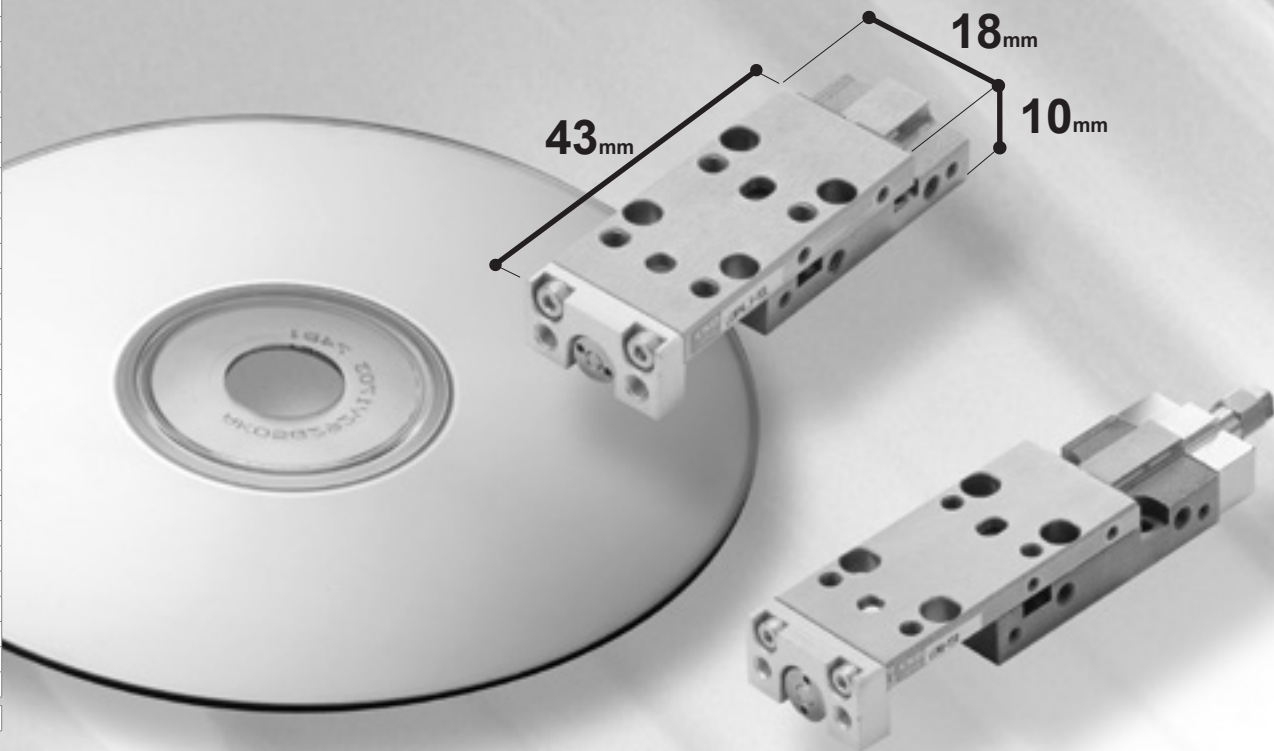


● High-precision positioning

High precision 0.005 mm* parallelism during movement and 0.03 mm parallelism of installation. Ideal for positioning.

* 0.006 mm in some models. Refer to page 49 for details.

● Ultra-compact body

The cylinder body, linear guide and slide table are all integrated into an extremely small body.

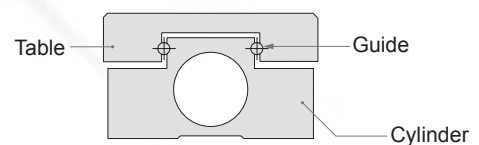

Linear Slide Cylinder

CKD

LCM Series

LCM
LCR
LCG
LCW
LCX
STM
STG
STS/STL
STR2
UCA2
ULK*
JSK/M2
JSG
JSC3/JSC4
USSD
UFCD
USC
UB
JSB3
LMB
LML
HCM
HCA
LBC
CAC4
UCAC2
CAC-N
UCAC-N
RCS2
RCC2
PCC
SHC
MCP
GLC
MFC
BBS
RRC
GRC
RV3*
NHS
HRL
LN
Hand
Chuk
MechHnd/Chuk
ShkAbs
FJ
FK
SpdContr
Ending

Fits in a narrow, small space

The compact body can fit in a narrow, small space allowing for more flexible layout.

A workpiece can be mounted on two sides.


A workpiece can be directly mounted on the top and side with the preprocessed mounting holes.

Reliable stainless steel body

The cylinder body and slide table are corrosion-resistant stainless steel.


Resistant to load

Uses linear guide with contact at four points. Withstands load from all directions.



Compatible with 2-color LED switch

The 2-color LED switch newly added to the ultra-compact F-switches is available.

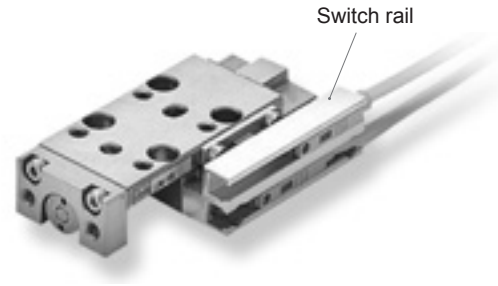

Wide range of choices

The stroke adjustable, side mounting and clean-room specifications are available.

LCM Series variation

Model variations	Bore size	Stroke (mm)					
		5	10	15	20	30	
Double acting/single rod	LCM	ø4.5	●	●	●	●	●
	LCM-P	ø6	●	●	●	●	●
		ø8	●	●	●	●	●
Double acting/stroke adjustable (Push)	LCM-R	ø4.5	●	●	●	●	●
		ø6	●	●	●	●	●
	ø8	●	●	●	●	●	
Double acting/stroke adjustable (push/pull)	LCM-A	ø4.5	●	●	●	●	●
		ø6	●	●	●	●	●
	ø8	●	●	●	●	●	
Double acting/single rod clean-room specifications	LCM-P73	ø4.5	●	●	●	●	●
		ø6	●	●	●	●	●
	ø8	●	●	●	●	●	