


4GA/B
M4GA/B
MN4GA/B
4GA/B (master)
4GB
With sensor
4GD/E
M4GD/E
MN4GD/E
4GA4/B4
MN3E
MN4E
W4GA/B2
W4GB4
MN3S0
MN4S0
4SA/B0
4KA/B
4KA/B (master)
4F
4F (master)
PV5G
GMF
PV5
GMF
PV5S-0
3Q
MV3QR
3MA/B0
3PA/B
P/M/B
NP/NAP
NVP
4G*0EJ
4F*0EX
4F*0E
HNV
HSV
2QV
3QV
SKH
Silencer
TotAirSys
(Total Air)
TotAirSys
(Gamma)
Ending

Slim profile

Plug-in manifold **W4G4** Series meets the needs of the times by providing excellent performance in space-saving, usability, service life and power consumption.

Driving compatible up to ø125 cylinders.

MW4GB4-T10

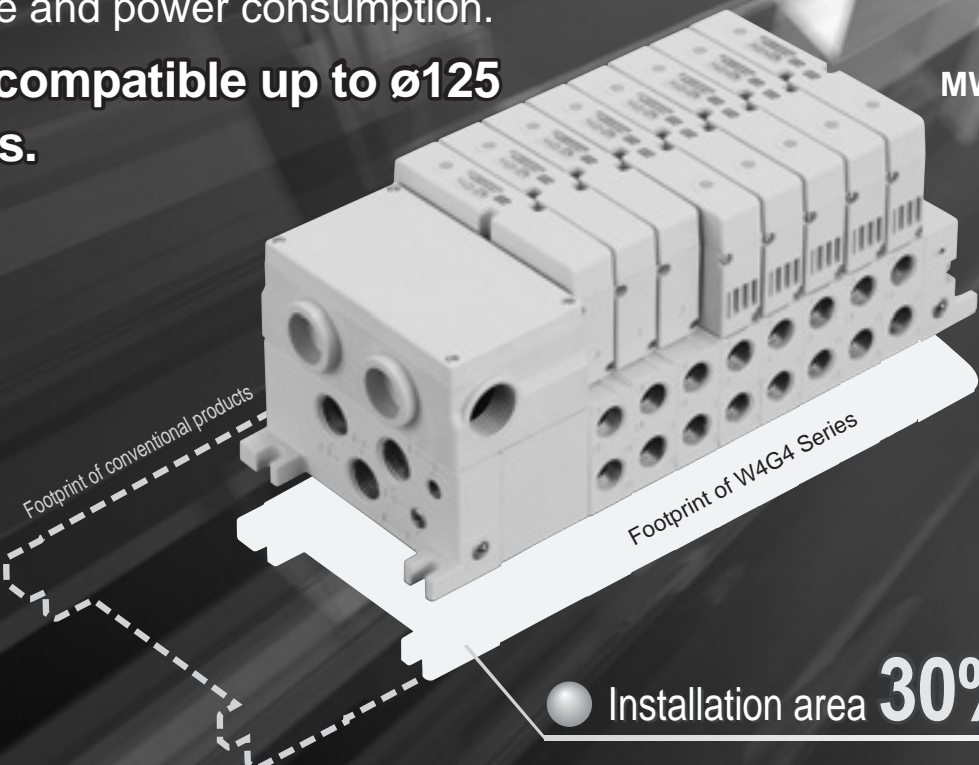


● **Power consumption 40% LESS**

Adopting the 1 W coil has enabled saving a large amount of power. (DC)

● **Easy expansion**

Connector interface between the manifold blocks. Work is simplified and valve expansion is easy.

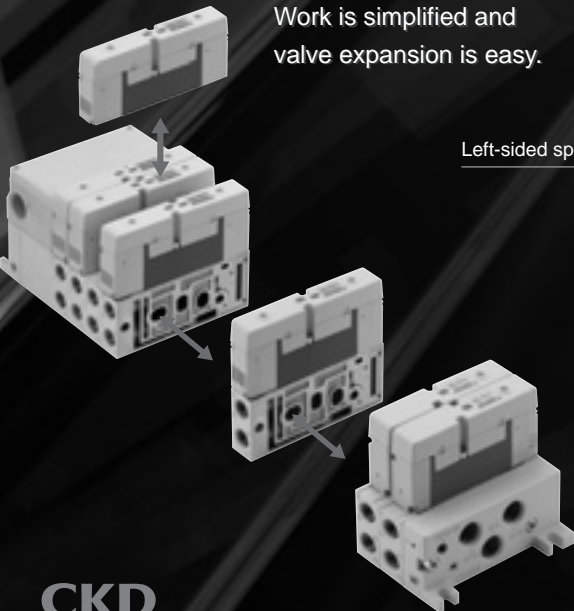

● **Installation area 30% LESS**


Shortening the valve width and length has enabled significant downsizing. (30% less than conventional models)

● **Flexible positioning of wiring blocks**

Wiring block can be mounted on the right (right-sided spec.) or left (left-sided spec.) of the manifold body as desired.

Left-sided spec. (model No.: T10)

Right-sided specifications (Model No: T10R)

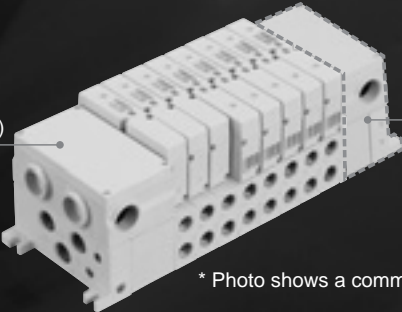

* Photo shows a common terminal block.

W4G4 Series

Wide array of electrical connections

Various serial transmission connections including CC-Link, DeviceNet, UNIWIRED, etc., are available in addition to the common terminal block, D-sub-connector and I/O connector (individual wiring).

Common terminal block

I/O connector

Serial transmission

D sub-connector

CC-Link

DeviceNet

EtherCAT


CC-Link IEF Basic

PROFINET



Improved safety and reliability

Rubber cover for manual override button. Prevents intake of foreign matter leading to misoperation.

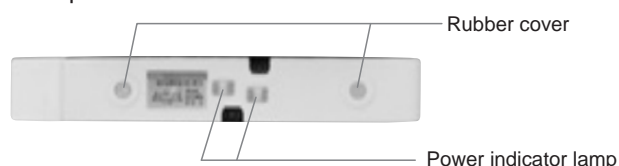

Uses 2-color display lamp


Orange (solenoid a) indicator and green (solenoid b) indicator lamp when power is ON.

Abundant options


Locking manual override




How to operate the manual override

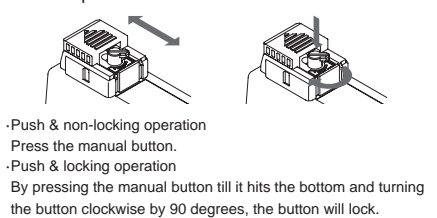

Rc3/8 back piping




Common exhaust block



Simple, easy piping

The piping fitting side is flat without protrusion of valves, not interfering with rotation of a wrench or similar tool, thus promoting efficient piping work.

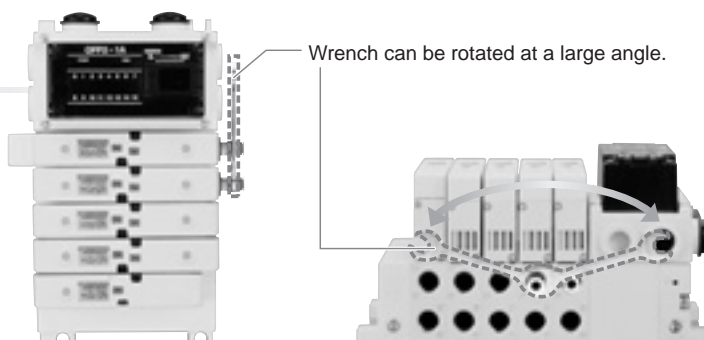

4GA/B
M4GA/B
MN4GA/B
4GA/B (master)
4GB With sensor
4GD/E
M4GD/E
MN4GD/E
4GA4/B4
MN3E MN4E
W4GA/B2
W4GB4
MN3S0 MN4S0
4SA/B0
4KA/B
4KA/B (master)
4F
4F (master)
PV5G GMF
PV5 GMF
PV5S-0
3Q
MV3QR
3MA/B0
3PA/B
P/M/B
NP/NAP NVP
4G*0EJ
4F*0EX
4F*0E
HMV HSV
2QV 3QV
SKH
Silencer
TotAirSys (Total Air)
TotAirSys (Gamma)
Ending