

DSTL

Guided Type

Electric Actuator with Motor Specification



CONTENTS

Product Introduction	414
● Specifications, Model No. Notation, External Dimension Drawings	
· DSTL-20	468
· DSTL-32	470
· DSTL-50	472
● Model Selection	474
⚠ Precautions for Use	518
Model Selection Check Sheet	524

DSTL System Table

Actuator Model No.	Motor Size	Screw Lead (mm)	Max. Payload (kg)		Stroke (mm) and Max. Speed (mm/s)			
			Horizontal	Vertical	50	100	150	200
DSTL-20	□35	6	4.4	6.4	90			
		9	4.4	4.8	135			
DSTL-32	□42	6	10	14	90			
		12	4	4.8	180			
DSTL-50	□56	6	14.8	13.2	72			
		12	9.2	7.2	144			



Electric Actuator Guided Type

DSTL-32

□42 Stepping Motor



For compatible detailed model Nos., please see our website.

Model No. Notation Method

DSTL - M - 32 S E - 06 050 T3PH R1 A 1 - F

1 Bearing type	2 Size	3 Connected Controller*1	4 Motor Mounting Direction	5 Lead	6 Stroke	7 Switch	8 Relay Cable *2	9 Controller Attached	10 IO Cable Length	11 Option
M Plain bearing	32 32	S ESC4	E Inline Mount	06 6 mm 12 12 mm	050 50 mm 100 100 mm 150 150 mm 200 200 mm	NNNN None T3PH T-type straight type T3PV T-type L-shape type	N0 None R1 Flexible 1 m R3 Flexible 3 m R5 Flexible 5 m RX Flexible 10 m	N None A DIN rail mounting specification B Panel mounting specification	N None 1 1 m 3 3 m 5 5 m X 10 m	Blank End plate material: Aluminum F End plate material: Steel

*1 For controllers, please refer to P. 611.

*2 For the external dimension drawing of the relay cable, please refer to P. 618.

Specifications

Connected Controller	ESC4	
Motor	□42 Stepping Motor	
Drive Method	Sliding screw ø8	
Stroke mm	50 to 200	
Screw lead mm	6	12
Max. Payload Horizontal kg *1	10	4
Max. Payload Vertical kg *1	14	4.8
Operating Speed Range *2 mm/s	15 to 90	30 to 180
Max. Acceleration/Deceleration *3 mm/s ²	1312 (Setting: 9)	5250 (Setting: 9)
Insulation Resistance	10 MΩ, 500 VDC	
Withstanding Voltage	500 VAC for 1 minute	
Operating Ambient Temperature, Humidity	0 to 40°C (no freezing) 35 to 80% RH (no condensation)	
Storage Ambient Temperature, Humidity	-10 to 50°C (no freezing) 35 to 80% RH (no condensation)	
Atmosphere	No corrosive gas, explosive gas, or dust	
Protection Structure	IP40	

*1 Payload varies depending on speed. For details, please refer to the speed and payload table. If the operating noise at low speed is loud, please increase the speed.

*2 Maximum speed may decrease depending on conditions.

*3 For acceleration/deceleration at other settings, please refer to the speed and payload table.

*4 Pushing operation is not supported. Colliding with the mechanical end, etc., may lead to damage to the internal parts of the actuator.

Speed and Payload

[Horizontal Installation]

Switch Setting	Speed (mm/s)	Screw Lead								
		6 mm				12 mm				
		Payload (kg)				Payload (kg)				
		Stroke (mm)				Stroke (mm)				
		50 or less	100 or less	200 or less	50 or less	100 or less	200 or less	50 or less	100 or less	200 or less
0	15	10.0	9.5	9.0	30	4.0	3.5	3.0		
1	23	9.2	8.7	8.2	46	3.2	1.9	1.4		
2	31	6.0	5.5	5.0	63	2.8	2.3	1.8		
3	40	6.0	5.5	5.0	80	2.4	2.7	2.2		
4	48	4.0	3.5	3.0	96	2.4	1.9	1.4		
5	56	3.6	3.1	2.6	113	2.4	1.9	1.4		
6	65	3.6	3.1	2.6	130	2.4	1.9	1.4		
7	73	3.2	2.7	2.2	146	2.0	1.5	1.0		
8	81	2.4	1.9	1.4	163	1.6	1.1	0.6		
9	90	2.0	1.5	1.0	180	1.2	0.7	0.2		

[Vertical Installation]

Switch Setting	Speed (mm/s)	Screw Lead								
		6 mm				12 mm				
		Payload (kg)				Payload (kg)				
		Stroke (mm)				Stroke (mm)				
		50 or less	100 or less	200 or less	50 or less	100 or less	200 or less	50 or less	100 or less	200 or less
0	15	14	13.5	13	30	4.8	4.3	3.8		
1	23	13.2	12.7	12.2	46	4	3.5	3.0		
2	31	12.4	11.9	11.4	63	4	3.5	3.0		
3	40	11.6	11.1	10.6	80	4	3.5	3.0		
4	48	11.6	11.1	10.6	96	3.6	3.1	2.6		
5	56	11.6	11.1	10.6	113	3.2	2.7	2.2		
6	65	10.8	10.3	9.8	130	2.8	2.3	1.8		
7	73	10.8	10.3	9.8	146	2.4	1.9	1.4		
8	81	10	9.5	9.0	163	2.0	1.5	1.0		
9	90	9.2	8.7	8.2	180	1.6	1.1	0.6		

* The speed setting is a guideline. A discrepancy from the actual values may occur due to switch adjustment, power supply voltage, individual differences among motors, variations in mechanical efficiency, and temperature.


* Value when no moment is applied to the end plate section. For details such as flatness of the mounting surface, please refer to the instruction manual.

DSTL-32 Series

External Dimension Drawing

External Dimension Drawing

● DSTL-32

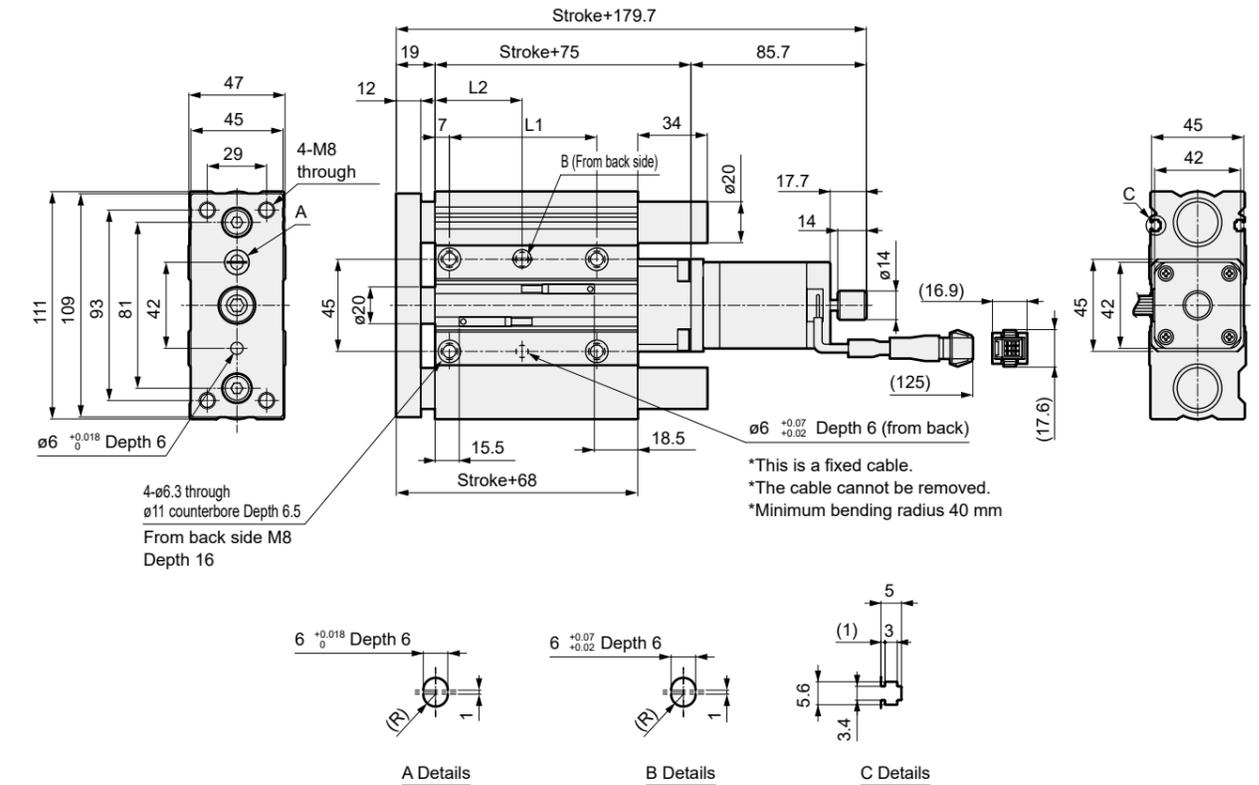

[Dimension Table by Stroke]

Stroke Code	050	100	150	200
Stroke (mm)	50	100	150	200
L1	72	122	172	222
L2	42.5	67.5	92.5	117.5
Weight (kg)	2.7	3.6	4.2	5.3



Electric Actuator Guided Type

DSTL-50

□56 Stepping Motor



For compatible detailed model Nos., please see our website.

Model No. Notation Method

DSTL - M - 50 S E - 06 050 T3PH R1 A 1 - F

1 Bearing type	2 Size	3 Connected Controller *1	4 Motor Mounting Direction	5 Lead	6 Stroke	7 Switch	8 Relay Cable *2	9 Controller Attached	10 IO Cable Length	11 Option
M Plain bearing	50 50	S ESC4	E Inline Mount	06 6 mm 12 12 mm	050 50 mm 100 100 mm 150 150 mm 200 200 mm	NNNN None T3PH T-type straight type T3PV T-type L-shape type	N0 None R1 Flexible 1 m R3 Flexible 3 m R5 Flexible 5 m RX Flexible 10 m	N None A DIN rail mounting specification B Panel mounting specification	N None 1 1 m 3 3 m 5 5 m X 10 m	Blank End plate material: Aluminum F End plate material: Steel

*1 For controllers, please refer to P. 611.
*2 For the external dimension drawing of the relay cable, please refer to P. 618.

Specifications

Connected Controller	ESC4	
Motor	□56 Stepping Motor	
Drive Method	Sliding screw ø12	
Stroke	50 to 200	
Screw lead	6	12
Max. Payload	Horizontal 14.8	Vertical 9.2
kg *1	13.2	7.2
Operating Speed Range *2	15 to 72	30 to 144
mm/s		
Max. Acceleration/Deceleration *3	827 (Setting: 9)	3306 (Setting: 9)
mm/s ²		
Insulation Resistance	10 MΩ, 500 VDC	
Withstanding Voltage	500 VAC for 1 minute	
Operating Ambient Temperature, Humidity	0 to 40°C (no freezing) 35 to 80% RH (no condensation)	
Storage Ambient Temperature, Humidity	-10 to 50°C (no freezing) 35 to 80% RH (no condensation)	
Atmosphere	No corrosive gas, explosive gas, or dust	
Protection Structure	IP40	

*1 Payload varies depending on speed. For details, please refer to the speed and payload table. If the operating noise at low speed is loud, please increase the speed.
*2 Maximum speed may decrease depending on conditions.
*3 For acceleration/deceleration at other settings, please refer to the speed and payload table. *4 Pushing operation is not supported. Colliding with the mechanical end, etc., may lead to damage to the internal parts of the actuator.

Speed and Payload

[Horizontal Installation]

Switch Setting	Speed (mm/s)	Screw Lead							
		6 mm				12 mm			
		50 or less	100 or less	200 or less	Stroke (mm)	Speed (mm/s)	50 or less	100 or less	200 or less
0	15	14.8	12.8	11.8	30	9.2	9.2	9.2	
1	21	11.6	9.6	8.6	42	9.2	9.2	9.2	
2	27	10.0	8	7.0	55	9.2	9.2	9.2	
3	34	8.4	6.4	5.4	68	9.2	7.2	6.2	
4	40	8.4	6.4	5.4	80	8.8	6.8	5.8	
5	46	8.4	6.4	5.4	93	8.8	6.8	5.8	
6	53	8.4	6.4	5.4	106	8.4	6.4	5.4	
7	59	6.8	4.8	3.8	118	7.6	5.6	4.6	
8	65	6.8	4.8	3.8	131	6.0	4.0	3.0	
9	72	6.8	4.8	3.8	144	4.4	2.4	1.4	

[Vertical Installation]

Switch Setting	Speed (mm/s)	Screw Lead							
		6 mm				12 mm			
		50 or less	100 or less	200 or less	Stroke (mm)	Speed (mm/s)	50 or less	100 or less	200 or less
0	15	13.2	12.2	11.2	30	7.2	6.2	5.2	
1	21	13.2	12.2	11.2	42	7.2	6.2	5.2	
2	27	13.2	12.2	11.2	55	7.2	6.2	5.2	
3	34	13.2	12.2	11.2	68	7.2	6.2	5.2	
4	40	12.8	11.8	10.8	80	7.2	6.2	5.2	
5	46	12.4	11.4	10.4	93	6.8	5.8	4.8	
6	53	12	11	10	106	6.4	5.4	4.4	
7	59	9.6	8.6	7.6	118	6	5	4	
8	65	7.6	6.6	5.6	131	4.4	3.4	2.4	
9	72	6	0	0	144	2.4	1.4	0.4	


* The speed setting is a guideline. A discrepancy from the actual values may occur due to switch adjustment, power supply voltage, individual differences among motors, variations in mechanical efficiency, and temperature.
* Value when no moment is applied to the end plate section. For details such as flatness of the mounting surface, please refer to the instruction manual.

DSTL-50 Series

External Dimension Drawing

External Dimension Drawing

● DSTL-50

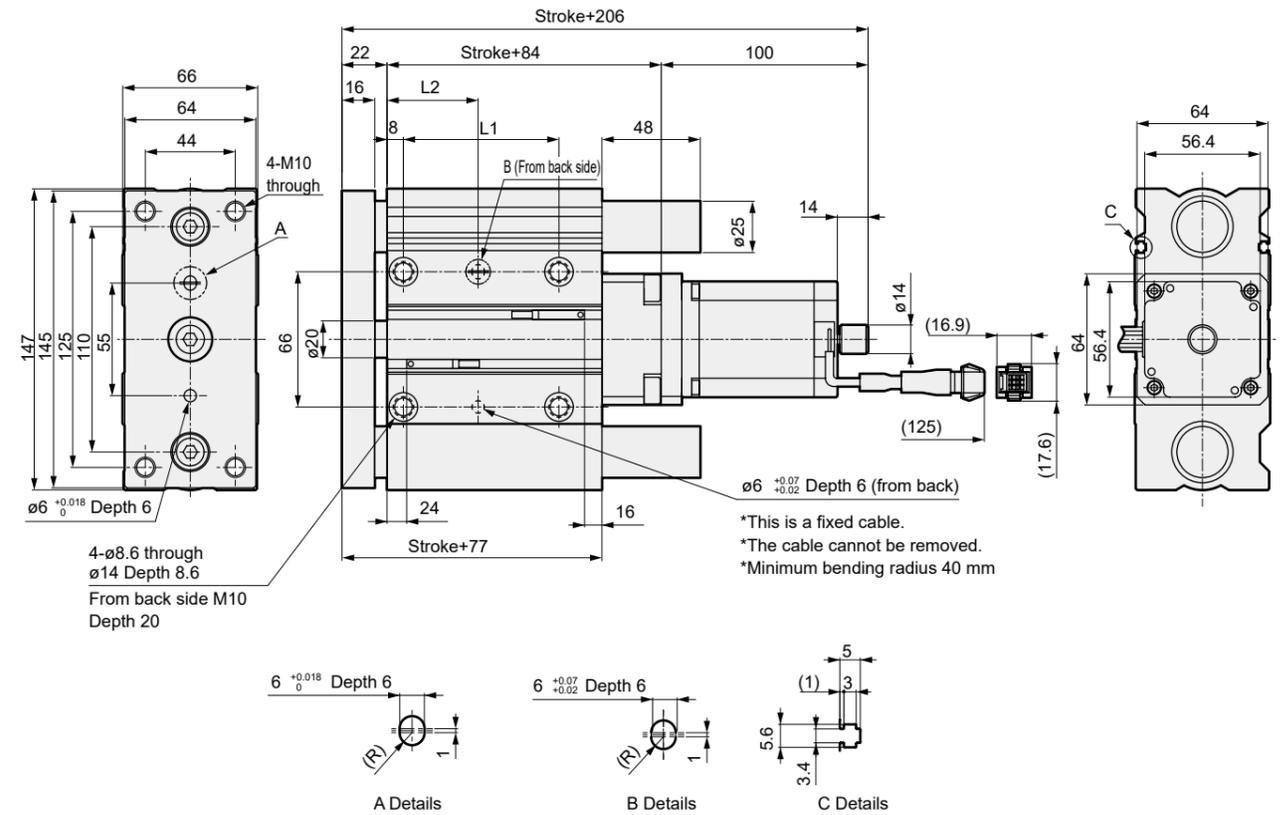

[Dimension Table by Stroke]

Stroke Code	050	100	150	200
Stroke (mm)	50	100	150	200
L1	76	126	176	226
L2	44.5	69.5	94.5	119.5
Weight (kg)	5.2	6.5	7.7	9.1

D Series

D Series

DSSD2

DSSD2

DSTK

DSTK

DSTG

DSTG

DSTS

DSTS

DSTL

DSTL

DMSDG

DMSDG

DLSH

DLSH

DCKW

DCKW

Ending

Ending

Model Selection


STEP1 Confirmation of Payload

Payload changes depending on mounting orientation, screw lead, and transport speed. Select the size and screw lead by referring to the system table (P. 467), the specification table for each model, and the payload table by speed setting.

STEP2 Confirmation of Positioning Time

Calculate the positioning time for the selected product according to the example below and check if it meets the required tact time.

Positioning time for general transfer operations

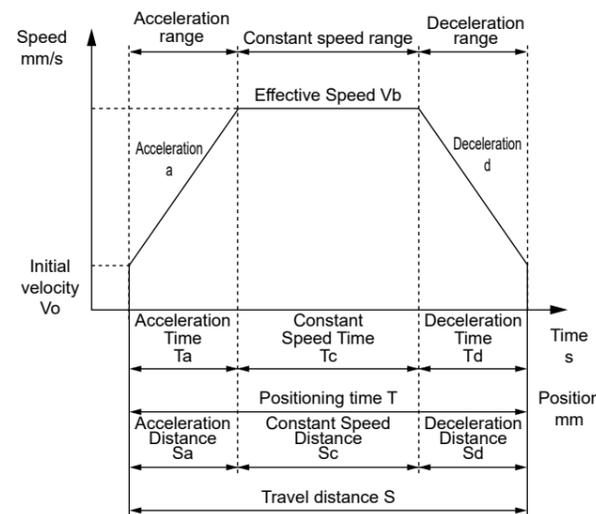

	Content	Code	Unit	Formula
Setting Value	Initial velocity	V0	mm/s	According to the table below (= value of switch setting 0)
	Speed Setting	V	mm/s	According to the table below
	Acceleration	a	mm/s ²	According to the table below (fixed value)
	Deceleration			
Travel Distance	S	mm	*	
Calculated Value	Reached Speed	Vmax	mm/s	$= (S \times a + V0^2)^{1/2}$
	Effective Speed	Vb	mm/s	The smaller of V and Vmax
	Acceleration Time	Ta	s	$= (Vb - V0) / a$
	Deceleration Time			
	Constant Speed Time	Tc	s	$= Sc / Vb$
	Acceleration Distance	Sa	mm	$= V0 \times Ta + (a \times Ta^2) / 2$
	Deceleration Distance			
	Constant Speed Distance	Sc	mm	$= S - 2 \times Sa$
	Positioning Time	T	s	$= 2 \times Ta + Tc$

* Depending on the speed setting and stroke, a trapezoidal velocity waveform may not be formed (the set speed may not be reached). In that case, select the smaller of the set speed (V) and the reached speed (Vmax) as the effective speed (Vb).
 * Acceleration/deceleration is determined by the speed setting.
 * The speed is determined by the settings of rotary switches 1 and 2.
 * Settling time varies depending on the usage conditions, but it may take about 0.2 s.

[Speed Setting] (mm/s)

Switch Setting	Size 20		Size 32		Size 50	
	L6	L9	L6	L12	L6	L12
0	15	22	15	30	15	30
1	23	35	23	46	21	42
2	31	47	31	63	27	55
3	40	60	40	80	34	68
4	48	72	48	96	40	80
5	56	85	56	113	46	93
6	65	97	65	130	53	106
7	73	110	73	146	59	118
8	81	122	81	163	65	131
9	90	135	90	180	72	144

[Acceleration, Deceleration] (mm/s²)

Switch Setting	Size 20		Size 32		Size 50	
	L6	L9	L6	L12	L6	L12
0	0	0	0	0	0	0
1	53	119	53	212	38	153
2	129	290	129	518	90	360
3	229	513	229	916	155	620
4	351	787	351	1407	234	934
5	497	1114	497	1990	325	1301
6	666	1492	666	2666	431	1722
7	858	1922	858	3435	549	2196
8	1074	2404	1074	4296	681	2724
9	1312	2938	1312	5250	827	3306

STEP3 Confirmation of Static Allowable Load and Static Allowable Moment

Calculate the load and moment that occur when the end plate stops. Confirm that the lateral load (W) and torsional moment (MY) are as follows. Following the formula below, confirm that the resultant moment (MT) satisfies the following expression.

Resultant moment

$$MT = \frac{MP}{MP_{max}} + \frac{MR}{MR_{max}} \leq 1.0$$

Static Allowable Load and Static Allowable Moment

Model No.	Stroke (mm)	Lateral Load W (N)	Bending moment MPmax (N·m)	Torsional moment MYmax (N·m)	Lateral bending moment MRmax (N·m)
DSTL-M-20	50	54	32.6	0.80	32.6
	100	38		0.56	
	150	30		0.44	
	200	24		0.35	
DSTL-M-32	50	161	107.4	3.26	107.4
	100	121		2.45	
	150	97		1.96	
	200	81		1.64	
DSTL-M-50	50	243	201.7	6.68	201.7
	100	189		5.20	
	150	155		4.26	
	200	131		3.60	

Calculate the allowable load when operating under load using the formula below.
 Catalog allowable lateral load × 0.9

● Lateral load W (N) *Vertical Installation

$$\frac{m1 \times l1 \times 10}{L} \leq W$$

Size	L
20	0.016+st
32	0.022+st
50	0.025+st

● Torsional moment MY (N·m)

$$MY = F3 \times l3 = 10 \times m3 \times l3$$

m1: } Load weight (kg)
 m2: }
 m3: }

l1: } Eccentricity (m)
 l2: }
 l3: }

G: Inertial force coefficient


● Bending moment MP (N·m)

$$MP = F1 \times l1 = 10 \times m1 \times G \times l1$$

● Lateral bending moment MR (N·m)

$$MR = F2 \times l2 = 10 \times m2 \times G \times l2$$


Figure 1 Trend of inertial force coefficient for guided type

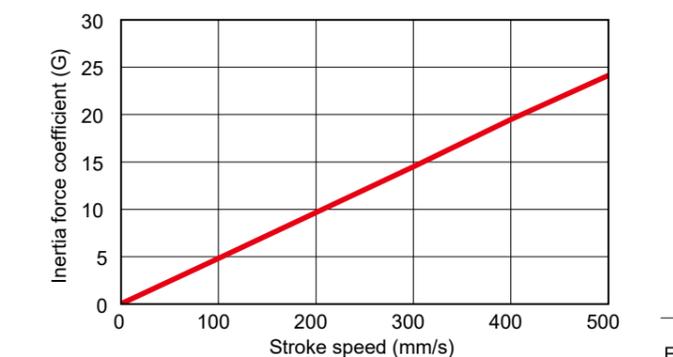


Model Selection

Runout accuracy

The amount of tilt that occurs at the tip of the end plate when there is no load is estimated by the values in the graph below. (Excluding the amount of deflection of the guide rod)

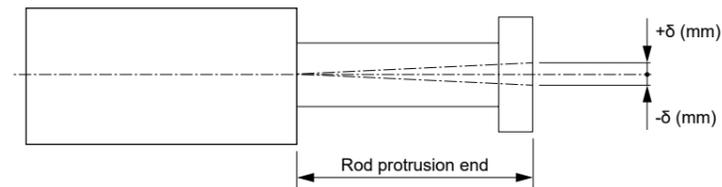


● DSTL-M

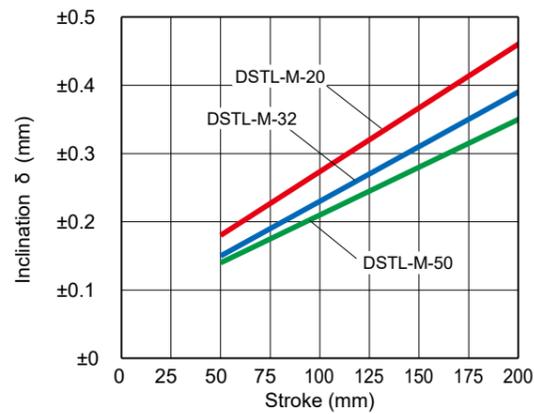


Non-rotation accuracy

(Reference value)

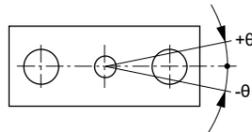


Size	Non-rotation accuracy θ (degrees)
DSTL-M-20	±0.10
DSTL-M-32	±0.08
DSTL-M-50	±0.07

Operating range when used as a stopper

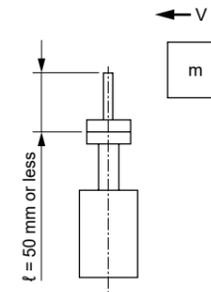


- *1 When using as a stopper, please select a model with a stroke of 50 or less.
- *2 The total length of the stopper part should be $\ell = 50$ mm or less.
- *3 When fixing the actuator body, ensure the bolt screwing depth is $2d$ or more and consider measures to prevent loosening (adhesive, spring washer, etc.).
- *4 For calculation of required operating thrust, please refer to P. 436.
- *5 Please calculate the actuator thrust using the formula below.
Thrust = Vertical payload × 10 (N)


Impact load

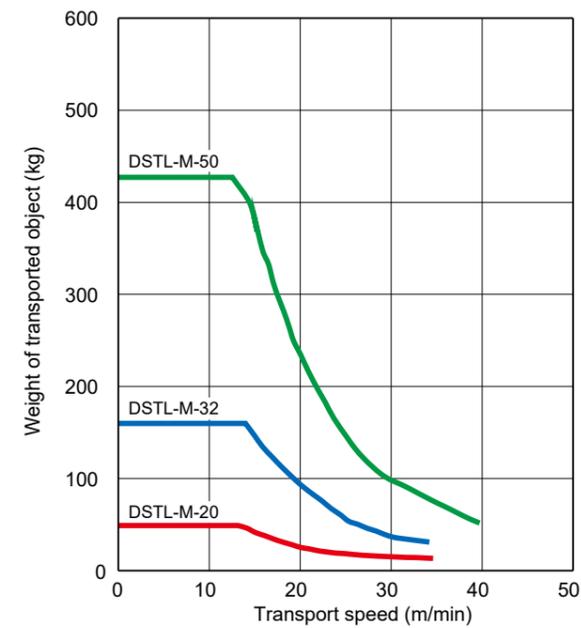


Allowable Lateral Load Plain bearing

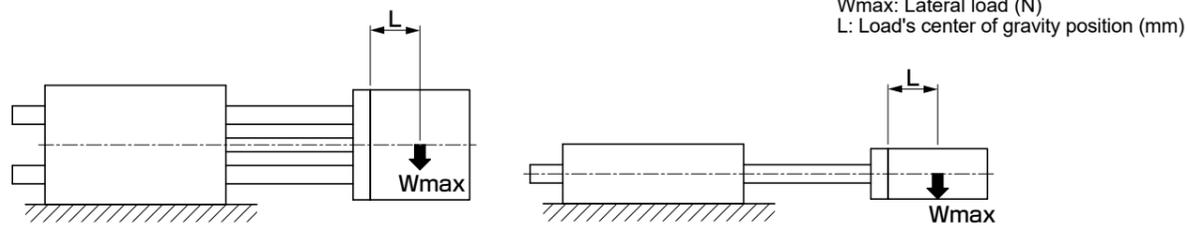

● When L=50 mm

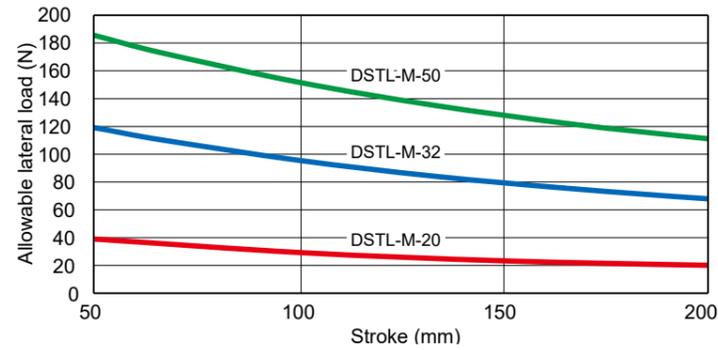

● When L=100 mm

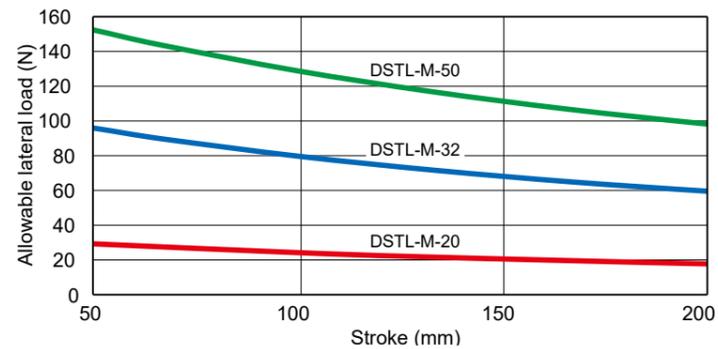


*1: Calculate the allowable lateral load when operating under load using the formula below. Catalog allowable lateral load value×0.9
*2: When designing, please consider the safety factor according to the operating conditions.

Special Order Product*


● Change of cable outlet direction

It is possible to change the outlet direction of the lead cable coming out of the motor.

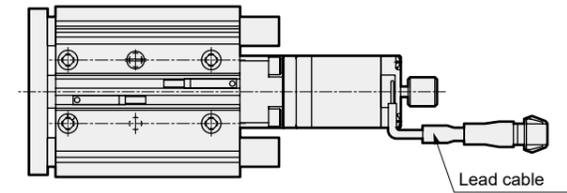

● Add cover to manual operation part

A rubber cover can be included to the manual operation part at the rear of the motor.

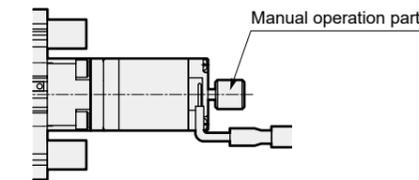

*For details on special order products, please contact our sales office.

D Series

DSSD2

DSTK

DSTG

DSTS

DSTL

DMSDG

DLSH

DCKW

D Series

DSSD2

DSTK

DSTG

DSTS

DSTL

DMSDG

DLSH

DCKW