



# Safety Precautions

Be sure to read this section before use.

When designing and manufacturing a device using CKD products, the manufacturer is obligated to check that device safety mechanism, pneumatic control circuit, or water control circuit and the system operated by electrical control that controls the devices is secured.

It is important to select, use, handle and maintain the product appropriately to ensure that the CKD product is used safely.

Observe warnings and precautions to ensure device safety.

Check that device safety is ensured, and manufacture a safe device.

## WARNING

- 1** This product is designed and manufactured as a general industrial machine part. It must be handled by an operator having sufficient knowledge and experience.
  - 2** Use this product in accordance with specifications.  
This product must be used within its stated specifications. In addition, never modify or additionally machine this product. This product is intended for use in general industrial machinery equipment or parts. It is not intended for use outdoors (except for products with outdoor specifications) or for use under the following conditions or environments. (Note that this product can be used when CKD is consulted prior to its usage and the customer consents to CKD product specifications. The customer should provide safety measures to avoid danger in the event of problems.)
    - ①** Use for applications requiring safety, including nuclear energy, railways, aircraft, marine vessels, vehicles, medical devices, devices or applications in contact with beverages or foodstuffs, amusement devices, emergency cutoff circuits, press machines, brake circuits, or safety devices or applications.
    - ②** Use for applications where life or assets could be significantly affected, and special safety measures are required.
  - 3** Observe organization standards and regulations, etc., related to the safety of device design and control, etc. ISO4414, JIS B 8370 (Pneumatics fluid power - General rules and safety requirements for systems and their components) JFPS2008 (Principles for pneumatic cylinder selection and use) Including the High Pressure Gas Safety Act, Industrial Safety and Health Act, other safety rules, organization standards and regulations, etc.
  - 4** Do not handle, pipe, or remove devices before confirming safety.
    - ①** Inspect and service the machine and devices after confirming safety of all systems related to this product.
    - ②** Note that there may be hot or charged sections even after operation is stopped.
    - ③** When inspecting or servicing the device, turn OFF the energy source (air supply or water supply), and turn OFF power to the facility. Discharge any compressed air from the system, and pay attention to possible water leakage and leakage of electricity.
    - ④** When starting or restarting a machine or device that incorporates pneumatic components, make sure that the system safety, such as pop-out prevention measures, is secured.
  - 5** Observe warnings and cautions in the following pages to prevent accidents.
- The precautions are ranked as "DANGER", "WARNING" and "CAUTION" in this section.

 **DANGER:** When a dangerous situation may occur if handling is mistaken leading to fatal or serious injuries, and when there is a high degree of emergency to a warning.

 **WARNING:** If handled incorrectly, a dangerous situation may occur, resulting in death or serious injury.

 **CAUTION:** When a dangerous situation may occur if handling is mistaken leading to minor injuries or physical damage.

Note that some items described as "CAUTION" may lead to serious results depending on the situation. Every item provides important information and must be observed.

## Warranty

- 1** **Warranty period**  
The product specified herein is warranted for one (1) year from the date of delivery to the location specified by the customer.
- 2** **Warranty coverage**  
If the product specified herein fails for reasons attributable to CKD within the warranty period specified above, CKD will promptly provide a replacement for the faulty product or a part thereof or repair the faulty product at one of CKD's facilities free of charge. However, following failures are excluded from this warranty:
  - 1) Failure caused by handling or use of the product under conditions and in environments not conforming to those stated in the catalog, the Specifications, or the Instruction Manual.
  - 2) Failure caused by use of the product exceeding its durability (cycles, distance, time, etc.) or caused by consumable parts.
  - 3) Failure not caused by the product.
  - 4) Failure caused by use not intended for the product.
  - 5) Failure caused by modifications/alterations or repairs not carried out by CKD.
  - 6) Failure caused by reasons unforeseen at the level of technology available at the time of delivery.
  - 7) Failure caused by acts of nature and disasters beyond control of CKD.

The warranty stated herein covers only the delivered product itself. Any loss or damage induced by failure of the delivered product is excluded from this warranty.  
Note: For details on the durability and consumable parts, contact your nearest CKD sales office.
- 3** **Compatibility check**  
The customer is responsible for confirming the compatibility of CKD products with the customer's systems, machines and equipment.

3GD\*0EX  
4GD\*0EX

3GE\*0EX  
4GE\*0EX

M3GD\*0EX  
M4GD\*0EX

M3GE\*0EX  
M4GE\*0EX

Related products

Manifold specifications sheet

Precautions for use



Pneumatic components

# Safety Precautions

Be sure to read this section before use.

For general precautions for valves, "Pneumatic Valves (No. CB-023SA)" for details.

Product-specific cautions: Pilot operated explosion-proof 3.5-port valve 4G\*/M4G\* EX Series

## Design/selection

### WARNING

- Usable in Class 1 and 2 danger zones (Zones 1 and 2) where there is combustible gas or steam. Cannot be used in special danger zones (Zone 0).
- Explosion-proof performance is Ex ib IIC T4 Gb.
- Use in combination with a barrier. Valves cannot be used independently in dangerous zones.

#### 1. Prohibition of Disassembly and Modification

### WARNING

- Disassembly of pilot valves or barriers not only leads to the risk of decreased explosion-proof performances but may also cause accidents. Accordingly, customers are asked not to disassemble or modify their units.

#### 2. Intrinsic safety explosion-proof circuit wiring

### WARNING

- The intrinsic safety explosion-proof circuit wiring should not be mixed with other circuitry, nor should it be installed so as to be affected by static induction or electromagnetic induction from other circuits.

#### 3. When using the product in combination with low friction cylinders

- Malfunctions could occur because of the exhaust pressure. Contact CKD.

#### 4. Degree of protection IP67

- 4GD/E\* The EX Series supports IP67 as standard and is protected from dust and water, but cannot be used immersed in water. Countermeasures such as a protective cover for the unit should also be taken if using in environments where it will be constantly exposed to dust or water.

- Barrier degree of protection is IP20.

Intrinsic safety-related Components (safety retainer, barrier) and intrinsic safety Components (4G EX Series) must meet the explosion-proof specifications below, as well as the safety retention ratings and parameters.

Intrinsic safety component	combination condition	Intrinsic safety related component
Explosion-proof structure and category: ia, ib, ic	≤	Explosion-proof structure and category: ia, ib, ic
Electrical Component group: IIA, IIB, IIC	≤	Electrical Component group: IIA, IIB, IIC
Ui: Intrinsic safety circuit allowable voltage (max. applicable voltage)	≥	Uo: Max. voltage (max. output voltage)
Ii: Intrinsic safety circuit allowable current (max. applicable current)	≥	Io: Max. current (max. output current)
Pi: Intrinsic safety circuit allowable power (max. input power)	≥	Po: Max. power (max. output power)
Ci+Cw Ci: Intrinsic Component's internal capacitance Cw: Intrinsic safety circuit wiring max. capacitance	≤	Co: Allowable capacitance (maximum connectable capacitance)
Li+Lw Li: Intrinsic Component's internal inductance Lw: Intrinsic safety circuit wiring max. inductance	≤	Lo: Allowable inductance (maximum connectable inductance)

The length of the intrinsic safety circuit external wiring can be calculated using the method below, in accordance with the above connection conditions.

Wiring capacitance and inductance are  $C_o \geq C_i + C_w$  and  $L_o \geq L_i + L_w$ .

The allowable wiring length must be less than or equal to the value of either  $(C_o - C_i) / C_c$  or  $(L_o - L_i) / L_c$ , whichever is smaller.

Cc: Capacitance per unit length, Lc: Inductance per unit length

3GD\*0EX  
4GD\*0EX

3GE\*0EX  
4GE\*0EX

M3GD\*0EX  
M4GD\*0EX

M3GE\*0EX  
M4GE\*0EX

Related products

Manifold  
specifications sheet

Precautions for use

## 5. Exhaust check valve

**CAUTION:** The exhaust check valve is a check valve. If the cylinder rod is manually operated directly without pressurization, the check valve opens and the air flow is shut off, preventing cylinder rod adjustment.





Generally, the double acting cylinder connected at the manifold to direct acting cylinders or ABR connection valves may malfunction when adversely affected by the exhaust pressure led in by operation of other cylinders. For the manifold of 4G Series, the "exhaust check valve" integrated to prevent this malfunction can be selected, except for all ports closed valves and PAB connection valves. However, with components that are affected by a small amount of leakage or pressure of low friction cylinders, etc., the functions may not operate properly. Moreover, 4G4 is not compatible with check valves.

3GD\*0EX  
4GD\*0EX

3GE\*0EX  
4GE\*0EX

M3GD\*0EX  
M4GD\*0EX

M3GE\*0EX  
M4GE\*0EX

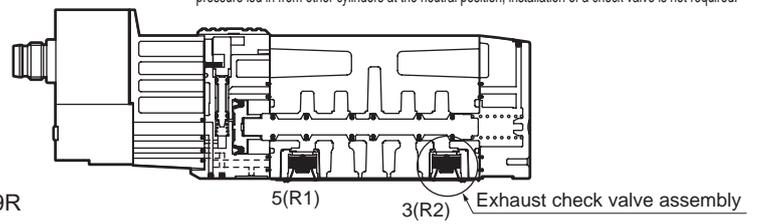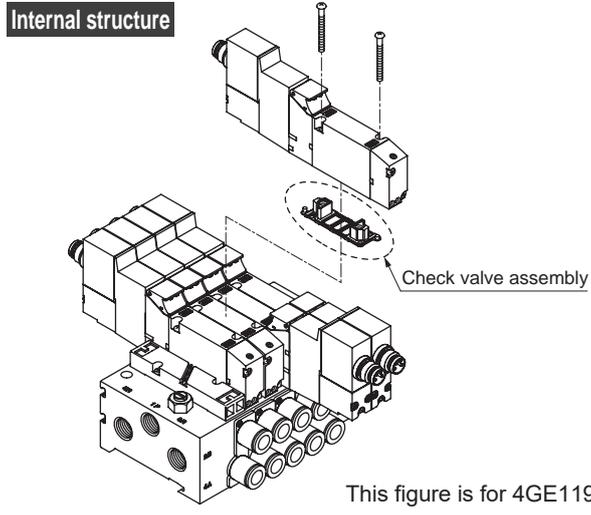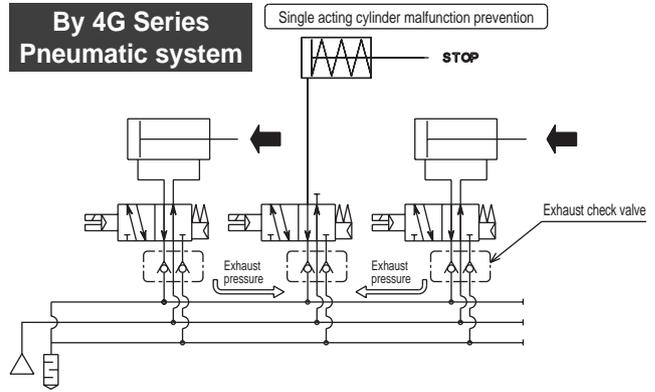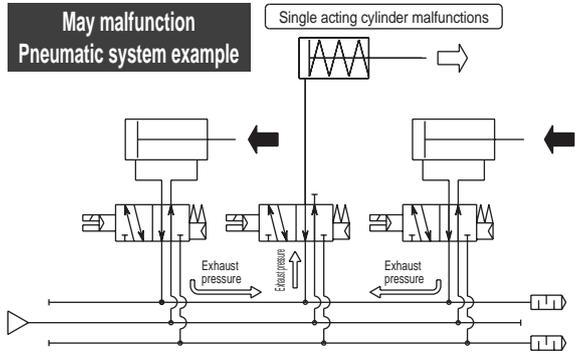

### Check valve equipped specifications

Model No.	Flow path switching	Option (H) selection
3G <sup>D</sup> <sub>m</sub> *669EX	Two 3-port valves integrated NC/NC	Yes
4G <sup>D</sup> <sub>m</sub> *19EX	2 position single	Yes
4G <sup>D</sup> <sub>m</sub> *29EX	2-position double	Yes
4G <sup>D</sup> <sub>m</sub> *39EX	3-position all ports closed	No
4G <sup>D</sup> <sub>m</sub> *49EX	3-position ABR connection	Yes
4G <sup>D</sup> <sub>m</sub> *59EX	3-position PAB connection	No

Note: Because 3-position all ports closed type and PAB connection type are not adversely affected by the exhaust pressure led in from other cylinders at the neutral position, installation of a check valve is not required.

This figure is for 4GE119R

## Mounting, installation and adjustment


### 1. Body piping (D) Discrete installation method

#### CAUTION


- When directly installing the manifold
  - The discrete body piping 4GD Series can be installed using the (a) through hole or (b) screw hole. When using the screw holes, be careful of the tightening torque.

Screw hole Tightening torque 0.7 to 1.2 N·m

4GD1 Series  
(a) 2 through holes

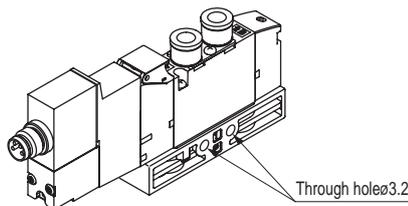


4GD2 Series  
(a) Through hole  
(b) 4 common screw holes

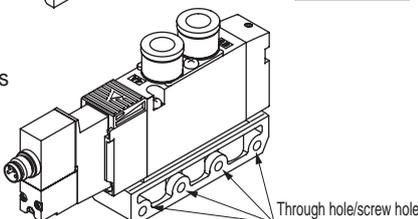


4GD3 Series

- (a) Through hole
- (b) 2 places each, dedicated for screws

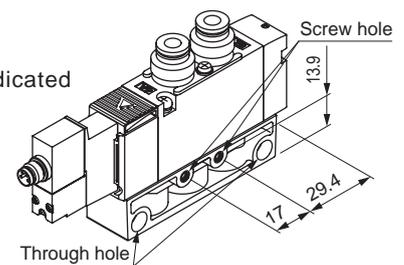

4 GD4 Series  
(a) 2 through holes



### Mounting hole shape

Sectional view of mounting hole	4GD2	4GD3	
	(a) (b) Common use	(a) Through hole	(b) Screw hole


Related products

Manifold specifications sheet

Precautions for use

- When installing the manifold with mounting plate (P)
  - Be careful of the mounting direction and orientation, as damage may result from incorrect mounting of body piping single mounting plate (P).

### ■ How to mount mounting plate (P)

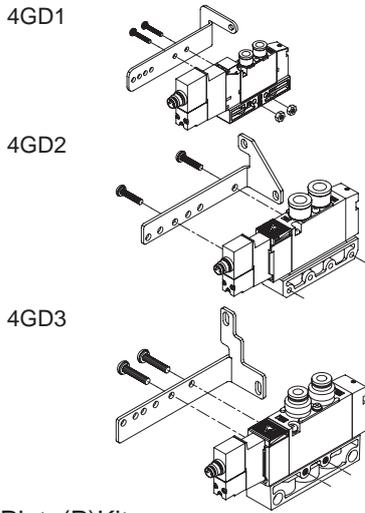

### MountingPlate(P)Kit

	Kit model No.	Set parts
4GD1	4G1R-MOUNT-PLATE-KIT	Mounting plate, 2 mounting screws, 2 nuts
4GD2	4G2R-MOUNT-PLATE-KIT	Mounting plate, 2 mounting screws
4GD3	4G3R-MOUNT-PLATE-KIT	Mounting plate, 2 mounting screws

\*Mounting plate is compatible only with single type. Moreover, 4G4 is not compatible.


## 2 . How to install manifold (Metal base 4G<sub>E</sub> Series)

### ⚠ CAUTION

#### ■ When directly installing the manifold


- For installation of the M4G2/3 Series, there are two methods of tightening the manifold with bolts: after passing it through the upper side of the manifold base and after tightening it with the bolts from the back side. When using a female thread as shown in the table below, check the thread depth, select a mounting bolt with 10 screw-in threads or more, and be careful with the tightening torque. The screw could be damaged if incorrectly installed.

Installation method  
M4G2/3 Series

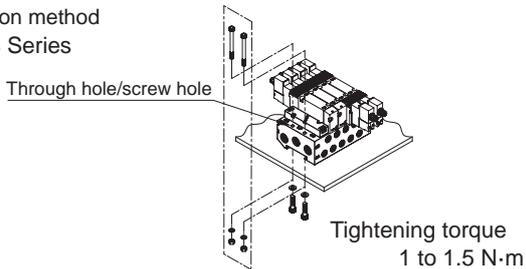

#### M4G4 Series

- For installation of M4G4<sub>E</sub> Series, tighten the manifold with bolts after passing them through the upper side of the manifold base.

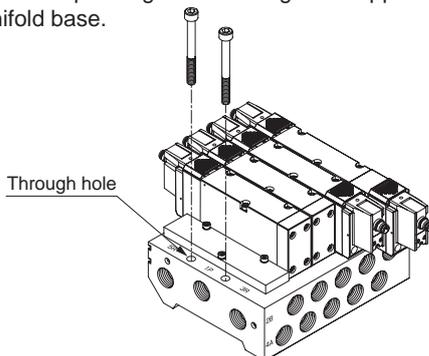


Mounting hole shape (sectional view)

	Standard manifold	
	M4GD (Body piping)	M4GE (Base piping)
M4G2		
M4G3		


## 3 . Port filter

### ⚠ CAUTION

- The port filter prevents the entry of foreign matter, and prevents problems from occurring in the valve. As this does not improve the quality of the compressed air, read Warnings and Precautions on the Intro pages of "Pneumatic Valves (No. CB-023SA)," then mount, install, and adjust accordingly. Do not detach or press down the port filter forcibly. The filter could deform, causing problems. If contaminants and foreign matter are found on the filter surface, blow them off lightly, or remove them with tweezers, etc.

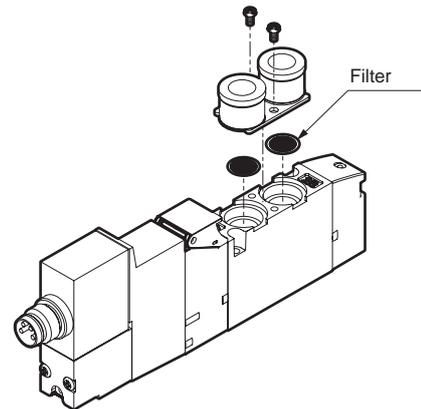

#### M4G Series

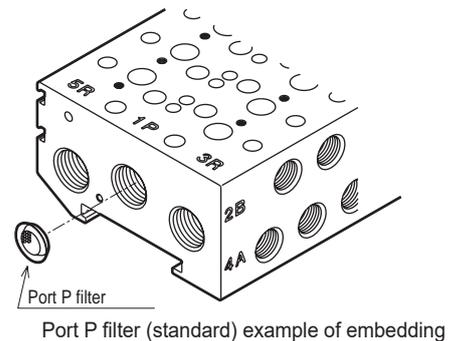

3GD\*0EX  
4GD\*0EX

3GE\*0EX  
4GE\*0EX

M3GD\*0EX  
M4GD\*0EX

M3GE\*0EX  
M4GE\*0EX


Related products

Manifold  
specifications sheet

Precautions for use

## 4. M8 connector cable

M8 connector tightening torque is 0.38 to 0.42 N·m. The degree of protection (IP67) will not be upheld if not tightened to the appropriate torque.

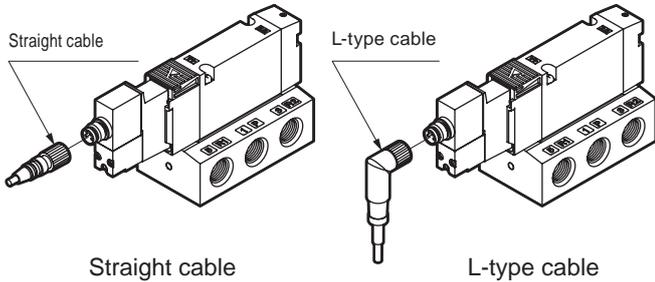

Wire the included M8 connector cable as below.

- Black: 12 V
- Blue: 0 V
- Brown and white: Not used.

Be careful as the solenoid has polarity.

## Use/maintenance

### 1. Continuous energizing

#### CAUTION

■ If a valve is used in a continuously energized state for long periods, the valve performance may deteriorate more quickly. Furthermore, use caution under the following working conditions likewise.

- When the energized time exceeds non-energized time in intermittent energizing
- When one energizing session exceeds 30 minutes in intermittent energizing

Give sufficient consideration to heat dissipation when installing the product.

### 2. Manual override

#### WARNING


■ The 4G Series is an internal pilot solenoid valve. If air is not supplied to port P, the main valve will not be switched even if the manual override is operated.

■ A manual protection cover is provided as standard. The manual protective cover is closed when the valve is shipped to protect it, which cannot be seen when delivered. Open the protective cover and operate the manual override. Note that the protective cover will not close unless the locking manual override is released.

■ Manual override is used for both non-locking and locking. The lock is applied by pressing down and turning the manual override. For locking, be sure to press down and turn. If manual override is turned without being pressed down, it could be damaged or air could leak.


■ Opening and closing the manual protection cover  
Do not excessively force the manual protection cover when opening and closing it. Excessive external force may cause breakdown. (Below 5 N)

4G1 Series



Rotary


4G2 to 4 Series



Sliding

### How to operate manual override

- Push non-locking operation  
Push straight in the direction of the arrow until it stops. When released, the manual operation is released.
- Push locking operation  
Push and hold the button and turn it 90° in the direction of the arrow. The function is not canceled even when the button is released.

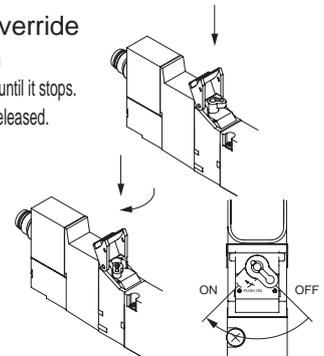


■ When conducting manual operations, make sure that there are no people near the operating cylinder.

### 3. How to replace the cartridge fitting


#### CAUTION

■ Check procedures before changing the push-in fitting size. If installed incorrectly, or if the tightening of the mounting screw is insufficient, air leakage could occur.

■ Body piping (D)  
4G 1, 2, 3



4G4



- ① Remove the mounting screw.
- ② Pull out the stopper plate and fitting together.
- ③ Align the groove of the replacement fitting with the stopper plate and assemble them temporarily.
- ④ Assemble the stopper plate with the fitting, and tighten the mounting screw. Pull the fitting, Confirm installation.

	Size	Tightening Torque (N·m)
4G1	M1.7	0.18 to 0.22
4G2	M2.5	0.25 to 0.30
4G3	M3	0.6 to 0.7
4G4	M3	0.6 to 0.7

3GD\*0EX  
4GD\*0EX

3GE\*0EX  
4GE\*0EX

M3GD\*0EX  
M4GD\*0EX


M3GE\*0EX  
M4GE\*0EX

Related products

Manifold specifications sheet

Precautions for use

## ■ Base piping (E)



- ① Remove the mounting screw.
- ② Pull out the stopper plate and fitting together.
- ③ Align the groove of the replacement fitting with the stopper plate and assemble them temporarily.
- ④ Assemble the stopper plate with the fitting, and tighten the mounting screw. Pull on the fitting to confirm that it is properly installed.

## Model No. of cartridge push-in fitting

Model	Part name	Model No.
4G1	ø4 straight	4G1R-JOINT-C4
	ø6 straight	4G1R-JOINT-C6
	Plug cartridge	4G1R-JOINT-CPG
4G2	ø4 straight	4G2R-JOINT-C4
	ø6 straight	4G2R-JOINT-C6
	ø8 straight	4G2R-JOINT-C8
	Plug cartridge	4G2R-JOINT-CPG
4G3	ø6 straight	4G3R-JOINT-C6
	ø8 straight	4G3R-JOINT-C8
	ø10 straight	4G3R-JOINT-C10
	Plug cartridge	4G3R-JOINT-CPG
4G4	ø8 straight	4G4-JOINT-C8
	ø10 straight	4G4-JOINT-C10
	ø12 straight	4G4-JOINT-C12

## Exporting

### 1 . About Barriers

#### ⚠ CAUTION

■ Please check the following for the request and inquiry of issuance of the non-judgment document and EAR judgment document.

[D5048S]

For inquiries, please contact  
 GMI Japan Co., Ltd.  
 TEL :045-228-9502  
 FAX :045-228-9503  
 Or, request an issue from  
<https://www.gmijapan.co.jp/contact/>

[Z728/Z779]

For inquiries, please contact  
 Pepperl+Fuchs Inc.  
 TEL:045-624-9077  
 E-mail:sales@jp.pepperl-fuchs.com

## Related products

### ATEX Directive compliant 4GD/E EA Series

- Explosion-proof performance Explosion-proof performance II 2G Ex ib IIC T4 Gb
- Intrinsic safety explosion-proof
- ATEX category 2

